

- SD212-SF3P4LDF(D00)** 2 dipole, 5 dBd, offset, low PIM, 190-225 MHz
- 2-bay dipole antenna that covers the 190-225 MHz band
 - 5 dBd gain with offset pattern
 - 250W power handling
 - Can be top or side mounted (Universal Mount)

**Recommend SMK-125-A3 or SMK-125-A7 for Offset Side Mount.
Available from Sinclair separately.**

The SD212-L series is an extremely rugged 2-bay exposed dipole antenna designed for applications where moderate gain is required and Passive Intermodulation interference (PIM) is a consideration. These premium-quality antennas are well suited for public safety applications.

The SD212-L provides industry leading -150 dBc Passive Intermodulation (PIM) performance.

Application Notes

- The SD212-L is a rugged low-PIM, medium gain dipole antenna designed to provide coverage for public safety applications. The SD212-L is especially well suited to multicoupled applications where PIM is a consideration.
- Sub bands:
118-138 MHz (F1)
138-174 MHz (F2)
190-225 MHz (F3)



Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com
Product Specification Sheet EPR 017975-4 Customer Tech Manual 006144		SD212-SF3P4LDF(D00)	Issue: 5	Dated: 05-06-17 Dated: 30-09-13

Electrical Specifications

Frequency Range	MHz	190 to 225
Connector		7/16 DIN-Female
Gain (nominal)	dBd (dBi)	5 (7.1)
Input VSWR (max)		1.5:1
Polarization		vertical
Impedance	Ω	50
Pattern		Offset
Horizontal beamwidth (typ)	degrees	210
Vertical beamwidth (typ)	degrees	34
Average Power Input (max)	W	250
Passive intermod. (2x20W, 3rd ord.)	dBc	-150
Lightning protection		DC ground
Electrical tilt (available)		0,2,4,6,8, or 10 degrees

Notes


- *1 : 0.5" radial ice
- *2 : Qty 2

Mechanical Specifications

Width	in (mm)	16.8 (427)
Depth	in (mm)	3 (76)
Length/ Height	in (mm)	120 (3048)
Base pipe diameter	in (mm)	1.9 (48)
Radiating element material		aluminum
Base pipe material		aluminum
Weight	lbs (kg)	21.4 (9.72)
Weight iced (1/2" ice)	lbs (kg)	47 (21.34) *1
Mounting Hardware (Optional)		Clamp005, Clamp015, or Clamp130 *2
Recommended For Offset Side Mount:		SMK-125-A3 or SMK-125-A7
Mounting configurations		Universal Mount
Actual shipping weight	lbs (kg)	32 (14.53)
Shipping dimensions	in (mm)	124x24x4 (3150x610x102)

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	1.62 (0.15)
Wind Loading Area (1/2" ice)	ft² (m²)	2.79 (0.26)
Rated wind velocity (no ice)	mph (km/h)	165 (266)
Rated wind velocity (1/2" radial ice)	mph (km/h)	115 (185)
Lateral Thrust (100 mph No Ice)	lbs (N)	59.1 (262.9)
Torsional moment (100 mph No Ice)	ft-lbs (Nm)	17.6 (23.8)
Bending moment (100 mph No Ice)	ft-lbs (Nm)	219 (295.7)

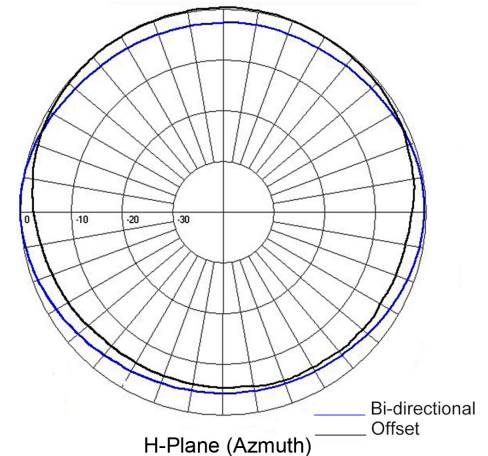

Ordering Information

Clamps must be ordered separately.

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com