

SD312-HF3P4LDF(D00) 2 dipole, 4.5 dBd, offset, low PIM, HD, 450-512 MHz

- Covers 450-512 MHz frequency range
- 4.5 dBd with offset pattern
- Heavy-duty wind ratings, low PIM, and 150W power handling
- Can be bottom or side mounted (Universal mount)

**Recommend the SMK-125-A3 side mount kit which is available from Sinclair separately**

The SD312-HL series is an extremely rugged 2-bay exposed dipole low PIM antenna designed for applications where moderate gain is required and Passive Intermodulation interference (PIM) is a consideration. These premium-quality antennas are well suited to public safety applications.



www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

### Electrical Specifications

Frequency Range	MHz	450 to 512
Bandwidth	MHz	62
Connector		7/16 DIN-Female
Gain (nominal)	dBd (dBi)	4.5 (6.6)
Input VSWR (max)		1.5:1
Polarization		vertical
Impedance	Ω	50
Pattern		Offset
Horizontal beamwidth (typ)	degrees	190
Vertical beamwidth (typ)	degrees	36
Average Power Input (max)	W	150
Passive intermod. (2x20W, 3rd ord.)	dBc	-150
Lightning protection		DC ground
Electrical tilt (available)		0,2,4,6,8, or 10 degrees

### Notes


- \*1 : @100mph/160kph, no ice
- \*2 : @100mph/160kph, no ice
- \*3 : @100mph/160kph, no ice
- \*4 : @100mph/160kph, no ice

### Ordering Information

N-type connectors available

### Mechanical Specifications

Width	in (mm)	11.4 (290)
Depth	in (mm)	3.5 (89)
Length/ Height	in (mm)	83.13 (2112)
Base pipe diameter	in (mm)	1.9 (48)
Base pipe mounting length	in (mm)	24 (610)
Radiating element material		aluminum
Base pipe material		aluminum
Weight	lbs (kg)	9.6 (4.36)
Weight iced (1/2" ice)	lbs (kg)	12.1 (5.49)
Mounting Hardware (Optional)		Clamp005, Clamp015, Clamp130, or Clamp125U
Actual shipping weight	lbs (kg)	20 (9.08)
Shipping dimensions	in (mm)	89x21x6 (2261x533x152)
Mounting configurations		Universal Mount
Recommended For Offset Side Mount:		SMK-125-A3

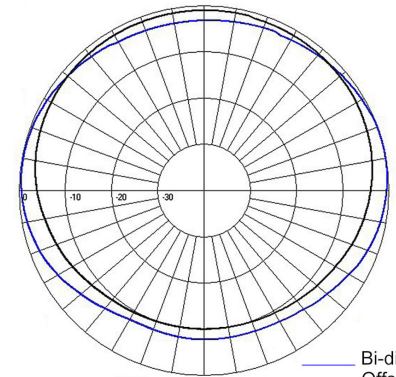

### Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	0.86 (0.08)
Wind Loading Area (1/2" ice)	ft² (m²)	1.66 (0.15)
Rated wind velocity (no ice)	mph (km/h)	250 (403)
Rated wind velocity (1/2" radial ice)	mph (km/h)	180 (290)
Lateral thrust (100 mph No Ice)	lbs (N)	36.8 (163.7) *1
Torsional moment (100 mph No Ice)	ft-lbs (Nm)	3 (4.1) *2
Bending moment (100 mph No Ice)	ft-lbs (Nm)	103 (139.1) *3
Tip deflection (100 mph No Ice)	degrees	0.21 *4

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com