

SD314-HF2P2SNM(D00I) 4 dipole, 8 dBd, bi-directional, N-Male, HD, Inverted, 406-512 MHz

- Covers 406-512 MHz frequency range
- 8 dBd with bi-directional pattern
- 200 Watt power handling
- Inverted mount

**Recommend SMK-125-A3 side mount kit when side mounting antenna.  
Available from Sinclair separately.**

The SD314-H series is an extremely rugged 4-bay exposed dipole antenna designed for applications where the moderate gain is required. These premium-quality antennas are well suited to public safety applications.

The design of these antennas provides for coverage between 370 to 512 MHz in 2 sub-bands, 370-460 MHz and 406-512 MHz for private mobile networks, public safety, and public security networks.

Also available with an N-Female connector, and please ask your Sinclair customer service representative for detail:

Model name	Connector
SD314-HF2P2SNM(D00I)	N-Male
SD314-HF2P2SNF(D00I)	N-Female

www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

### Electrical Specifications

Frequency Range	MHz	406 to 512	
Connector		N-Male	*1
Gain (nominal)	dBd (dBi)	8 (10.1)	
Input VSWR (max)		1.5:1	
Polarization		vertical	
Impedance	Ω	50	
Pattern		Bi-directional	
Vertical beamwidth (typ)	degrees	16	
Average Input Power (max)	W	200	*2
Lightning protection		DC ground	
Electrical tilt (available)		0,2,4,6,8, or 10 degrees	

### Notes

- \*1 : N-Female available.
- \*2 : 300 Watts at 40 degrees C
- \*3 : Qty 2
- \*4 : Flat plate equivalent.

### Mechanical Specifications


Width	in (mm)	16 (406)	
Depth	in (mm)	3.5 (89)	
Length/ Height	in (mm)	114 (2896)	
Base pipe diameter	in (mm)	2.38 (60)	
Base pipe mounting length	in (mm)	36 (914)	
Radiating element material		aluminum	
Base pipe material		aluminum	
Weight	lbs (kg)	23 (10.44)	
Mounting Hardware (Optional)		Clamp005, Clamp015, Clamp130, or Clamp125U	*3
Recommended For Offset Side Mount:		SMK-125-A3	
Mounting configurations		Inverted	
Actual shipping weight	lbs (kg)	35 (15.89)	
Shipping dimensions	in (mm)	118x4x20 (2997x102x508)	

### Ordering Information

Clamps must be ordered separately.

### Environmental Specifications

Temperature range	°F (°C)	-40 to +158 (-40 to +70)	
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	1.91 (0.18)	
Wind Loading Area (1/2" ice)	ft² (m²)	5.56 (0.52)	*4
Rated wind velocity (no ice)	mph (km/h)	185 (298)	
Rated wind velocity (1/2" radial ice)	mph (km/h)	150 (242)	
Lateral Thrust (100 mph No Ice)	lbs (N)	77 (342.5)	
Torsional moment (100 mph No Ice)	ft-lbs (Nm)	22 (29.7)	
Bending moment (100 mph No Ice)	ft-lbs (Nm)	153 (206.6)	

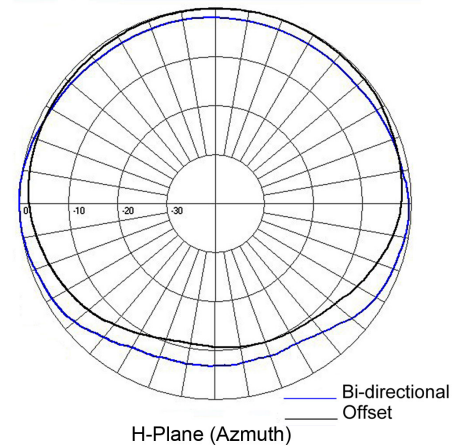

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com