

SUB-4063 Mobile omni antenna, 3 dBd gain, 406-430 MHz

- High impact UV resistant ABS housing
- Stainless steel fittings
- Stands up to severe environmental conditions


These antennas are fabricated from durable components and are designed to last. Rugged ABS housings are UV resistant and will not chalk, fade or crack. Fittings are constructed of stainless steel to inhibit rust and corrosion and are molded into the housing without the use of glue or fasteners to ensure a long lasting, reliable product, even in severe environments.

Many different mounts are available.

Optional shock spring available upon request.

Application Notes

- Sinclair manufactures a wide range of mobile antennas. These products are very durable and reliable and can withstand the most severe environmental conditions. These antennas are suitable for public safety applications and other "mission critical" operations.
- Uses 1 1/8-18 (TAD/TAE) mounting.

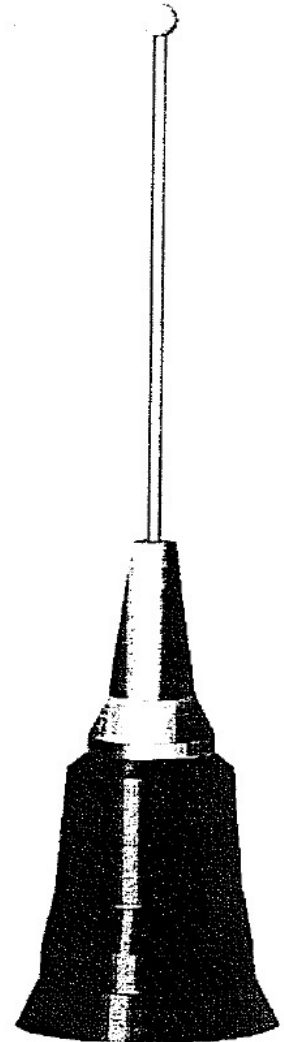

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications

Frequency Range	MHz	406 to 430
Bandwidth	MHz	15
% Bandwidth	%	3.8
Gain (nominal)	dBd (dBi)	3 (5.1)
Input VSWR (max)		1.5:1
Polarization		vertical
Impedance	Ω	50
Pattern		Omni-directional
Average Input Power (max)	W	100

Notes

*1 : 3.75%-15Mhz Typical

Mechanical Specifications

Length/ Height	in (mm)	16 (406)
Weight	lbs (kg)	0.5 (0.23)

Ordering Information

Specify frequency of operation and connector

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
-------------------	---------	--------------------------

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com