

SV360-SF3SNM Parabolic reflector directive, 15 dBd, 380-400 MHz

Also referred as: SRL360-3


- Highly directive parabolic reflector with welded aluminum rods
- Covers 380-400 MHz frequency range
- Rugged construction
- Suitable for horizontal or vertical polarization

Sinclair's SV360 series of parabolic reflector antennas cover the 335-470 MHz frequency range in 7 different sub-bands with a nominal gain of 15 dBd across the designed bandwidth.

These antennas have a good front-to-back ratio. They are great for point-to-point applications.

Performance is constant throughout the band.

- Each antenna has a rugged design to withstand harsh environmental conditions
- It is a highly directive parabolic antenna consisting of a back-firing dipole reflector assembly for increased gain and directivity
- The mounting hardware supplied will allow for either vertical or horizontal polarization
- DC ground for lightning protection

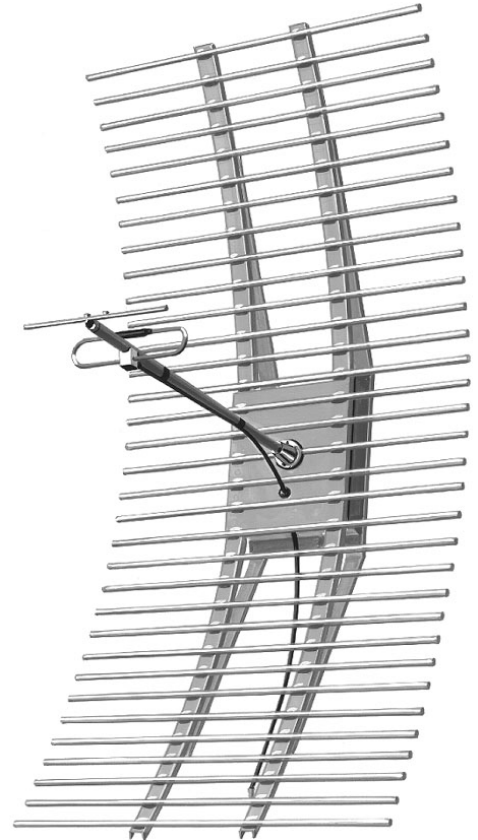

www.sinctech.com

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications

Frequency Range	MHz	380 to 400
Bandwidth	MHz	20
Connector		N-Male
Gain (nominal)	dBd (dBi)	15 (17.1)
Input VSWR (max)		1.5:1
Polarization		vertical or horizontal
Impedance	Ω	50
Pattern		Directional
Horizontal beamwidth (typ)	degrees	18
Vertical beamwidth (typ)	degrees	32
Average Power Input (max)	W	250
Lightning protection		DC ground
Front-to-back ratio (typ)	dB	25

Mechanical Specifications


Width	in (mm)	88 (2235)
Depth	in (mm)	25 (635)
Length/ Height	in (mm)	45.8 (1163)
Radiating element material		aluminum
Weight	lbs (kg)	36 (16.34)
Mounting Hardware (Included)		Clamp004
Actual shipping weight	lbs (kg)	46 (20.88)
Shipping dimensions	in (mm)	47x9x43 (1194x229x1092)

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Rated wind velocity (no ice)	mph (km/h)	100 (161)
Rated wind velocity (1/2" radial ice)	mph (km/h)	85 (137)
Lateral thrust (100 mph No Ice)	lbs (N)	422 (1877.1) *1

Notes

*1 : Worst case rated wind and ice

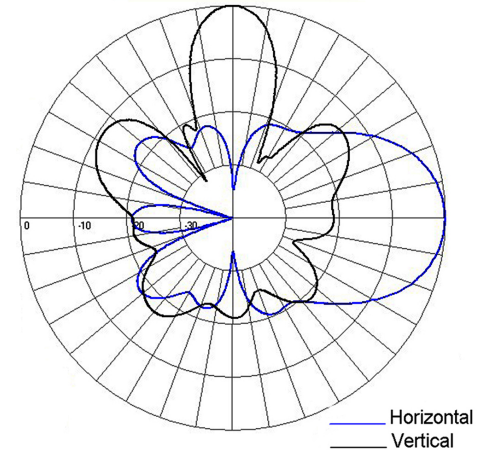

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com