


SY2062-SF11SNM(U) Yagi directional, dual array, universal mount, 12 dBd, 217-225 MHz

- Two- Six element Yagi
- Outstanding durability and performance
- DC ground potential for lightning protection
- Center or end mounting

The SY2062 series of antennas consists of two six-element Yagis of outstanding durability and performance. All elements including the folded dipole are maintained at DC Ground potential for lightning protection. All elements on this antenna are attached to the boom with solid cast aluminum clamps.

This highly versatile antenna is available as a standard mount Yagi (C version), or, as an extended boom (E version) mounted unit.

As with other Yagi's, this VHF antenna is available in multiple-unit arrays for added gain. Horizontally or vertically parallel kits of 'H' frames can readily be supplied to mount two or four Yagi's with a common feed.

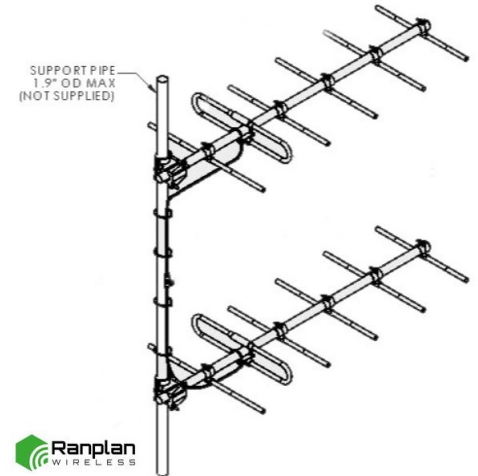

www.sincltech.com

Region	United States	Europe, Middle East, and Africa	Canada, Caribbean, and Latin America	Asia-Pacific
Telephone	1 800 263 3275	+44 (0) 1487 84 28 19	Canada: 1 800 263 3275 International: +1 905 726 7676	+1 905 727 0165
E-mail	salesusa@sincltech.com	salesuk@sincltech.com	salescan@sincltech.com	salesasia@sincltech.com

Product Specification Sheet
EPR 018607
Customer Tech Manual 006228

SY2062-SF11SNM(U)

Issue: 2

Dated: 25-03-21
Dated: 01-10-13

Electrical Specifications

Frequency Range	MHz	216 to 225
Bandwidth	MHz	9
Connector		N-Male
Gain (nominal)	dBd (dBi)	12 (14.1)
Input VSWR (max)		1.5:1
Polarization		vertical or horizontal
Pattern		Directional
Horizontal beamwidth (typ)	degrees	56
Vertical beamwidth (typ)	degrees	23
Average Input Power (max)	W	300
Front-to-back ratio (Typ)	dB	17
Lightning protection		DC ground

Notes

*1 : 0.5" radial ice

Mechanical Specifications


Width	in (mm)	26.75 (679)
Depth	in (mm)	5.5 (140)
Length/ Height	in (mm)	63 (1600)
Base pipe diameter	in (mm)	1.5 (38)
Radiating element material		aluminum
Reflector material		aluminum
Weight	lbs (kg)	13 (5.9)
Weight iced (1/2" ice)	lbs (kg)	51 (23.15) *1
Mounting Hardware (Included)		Clamp001
Mounting configurations		universal
Actual shipping weight	lbs (kg)	26 (11.8)
Shipping dimensions	in (mm)	37x6x6 (940x152x152)

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	2.08 (0.19)
Wind Loading Area (1/2" ice)	ft² (m²)	3.88 (0.36)
Rated wind velocity (no ice)	mph (km/h)	175 (282)
Rated wind velocity (1/2" radial ice)	mph (km/h)	125 (201)
Lateral Thrust (100 mph No Ice)	lbs (N)	77 (342.5)
Bending moment (100 mph No Ice)	ft-lbs (Nm)	162 (218.7)

Ordering Information

Mounting pipe is not included.

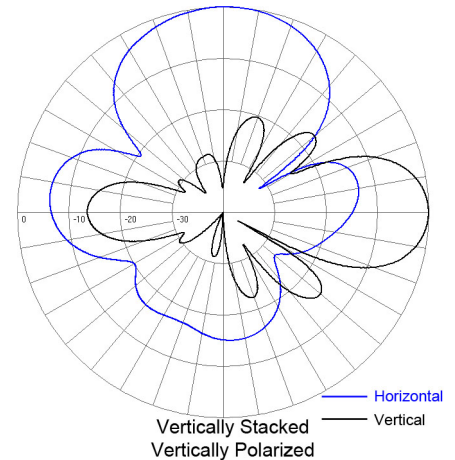

Polarization	Stacking	E-Plane	H-Plane
Vertical	Vertical	23	56
Vertical	Horizontal	46	28
Horizontal	Vertical	46	28
Horizontal	Horizontal	23	56

Region	United States	Europe, Middle East, and Africa	Canada, Caribbean, and Latin America	Asia-Pacific
Telephone	1 800 263 3275	+44 (0) 1487 84 28 19	Canada: 1 800 263 3275 International: +1 905 726 7676	+1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salescan@sinctech.com	salesasia@sinctech.com