


SY307-SF1SNM(ABK) Yagi directional, 10 dBd, black anodized, 400-430 MHz

Also referred as: SRL307NM*1

- Rugged 7-element 10 dBd gain yagi antenna.
- Reflector and director elements are 3/8 inch diameter aluminum rods.
- 360 degree welds to the boom and anodized for increased durability and extended life.

The SY307 is a rugged 7-element 10 dBd gain yagi antenna. Reflector and director elements are 3/8 inch diameter aluminum rods welded with 360 degree welds to the boom and anodized for increased durability and extended life.

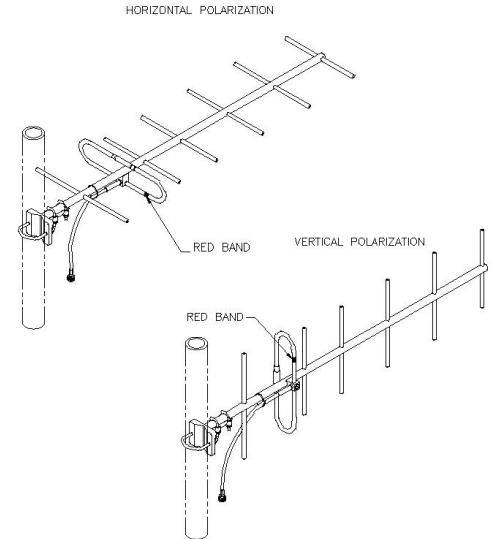

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications

Frequency Range	MHz	400 to 430	
Bandwidth	MHz	30	
Connector		N-Male	*1
Gain (nominal)	dBd (dBi)	10 (12.1)	
Input VSWR (max)		1.5:1	*2
Polarization		vertical or horizontal	
Impedance	Ω	50	
Pattern		Directional	
Horizontal beamwidth (typ)	degrees	55	
Vertical beamwidth (typ)	degrees	41	
Average Input Power (max)	W	250	
Front-to-back ratio (Typ)	dB	20	
Lightning protection		DC ground	

Notes

- *1 : NF& NM Available
- *2 : Antenna Impedance is 50 Ohms

Mechanical Specifications


Width	in (mm)	14.3 (363)
Depth	in (mm)	3 (76)
Length/ Height	in (mm)	44 (1118)
Radiating element material		aluminum
Reflector material		aluminum
Finish		anodize black
Weight	lbs (kg)	3.2 (1.45)
Mounting Hardware (Included)		Clamp115
Actual shipping weight	lbs (kg)	12 (5.45)
Shipping dimensions	in (mm)	47x6x18 (1194x152x457)

Environmental Specifications

Temperature range	°F (°C)	-40 to +140 (-40 to +60)
Wind Loading Area (Flat Plate Equivalent)	ft² (m²)	0.44 (0.04)
Wind Loading Area (1/2" ice)	ft² (m²)	1.19 (0.11)
Survival wind velocity (no ice)	mph (km/h)	215 (346)
Rated wind velocity (no ice)	mph (km/h)	180 (290)
Rated wind velocity (1/2" radial ice)	mph (km/h)	108 (174)
Lateral Thrust (100 mph No Ice)	lbs (N)	17.3 (77)
Bending moment (100 mph No Ice)	ft-lbs (Nm)	23 (31.1)

Ordering Information

Specify frequency of operation.

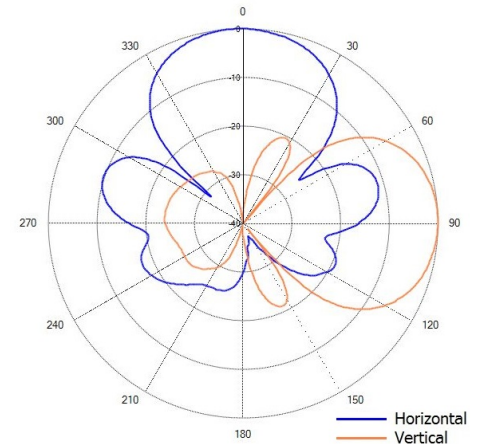

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com