

### TJ3115-R-5 Cavity-Ferrite Transmitter Combiner, 5 Channels, 7" Cavities, 459-512 MHz

- Low loss broad band single stage isolators
- Allows for minimum Tx-Tx spacings of 200 KHz
- Expandable for more channels
- Uses high 'Q' 1/4 wave bandpass cavity filters

Sinclair's 'TJ3x1y-R-z' series cavity ferrite transmitter combiners are available in 2 to 5 channel configurations for use in systems from 406-512 MHz. Each channel on these combiners includes a low-loss, broad band single or dual-stage isolator and High 'Q' 1/4 wave bandpass cavity filter suitable for close channel separations, typically 200 KHz.

The 'TJ3x1y-R-z' series combiners can be expanded to 20 channels. For expansion please contact the Sinclair Systems group.

The naming convention and options for the TJ3-R are as follows:

TJ3x1y-R-z


Isolator type

x=1 Single stage  
x=2 Dual stage

y= number of channels

Sub-band

z=3 406-440 MHz  
z=4 430-470 MHz  
z=5 459-512 MHz

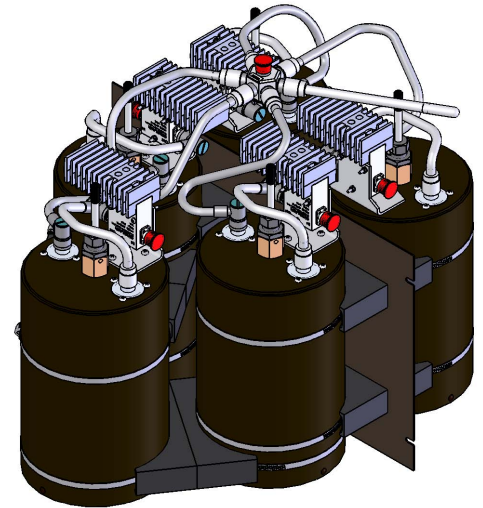

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

### Electrical Specifications

Frequency Range	MHz	459 to 512
Number of channels		5
Input Connectors		N-Female
Output Connectors		N-Female
Input VSWR (max)		1.25:1
Output VSWR		2:1
Insertion Loss (typ) Tx to Ant	dB	3.5
Maximum Input Power (per channel)	W	125
Frequency separation (min)	MHz	0.2
Isolation Tx to Tx	dB	35
Isolation antenna to Tx	dB	25
Cavity electrical length		1/4

### Notes

\*1 : @ 250 kHz Tx-Tx spacing

### Mechanical Specifications


Width	in (mm)	19 (483)
Depth	in (mm)	20.8 (528)
Length/ Height	in (mm)	15.3 (389)
Weight	lbs (kg)	50 (22.7)
Actual shipping weight	lbs (kg)	65 (29.51)
Shipping dimensions	in (mm)	20.5x20.5x24.5 (521x521x622)

### Environmental Specifications

Temperature range	°F (°C)	-22 to +140 (-30 to +60)
-------------------	---------	--------------------------

### Ordering Information

Specify one Tx frequency per channel at time of order.

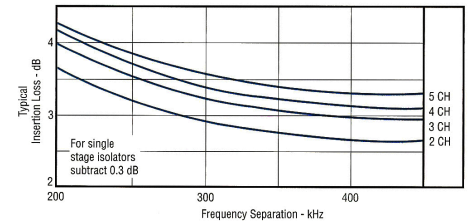

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
<b>Telephone</b>	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
<b>E-mail</b>	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com