


TN3115 Cavity-ferrite combiner, 5 channel, single stage isolators, 8.5" Cavities, 406-512 MHz

- 5 channel combiner utilizing 8.5" cavities tuneable over the 406-512 MHz frequency range
- Includes low loss single stage isolator (one per channel)
- Each channel has a very high Q bandpass cavity filter that fits horizontally in 19" rack

Sinclair's 'TN' series cavity ferrite transmitter combiners are available in 2- to 5-channel configurations for use in systems from 406-512 MHz. Each channel on these combiners includes a low-loss single or dual-stage isolator and Sinclair-developed High 'Q' bandpass cavity filter. All models are 19-inch rack mountable and can be retuned in the field with simple test equipment. The 'TN' series combiner is easily expanded and is the building block used in many Sinclair combining systems. Common electrical specifications for the TN3 series are shown below. To select the combiner ideally suited to your application, please consult your Sinclair representative.

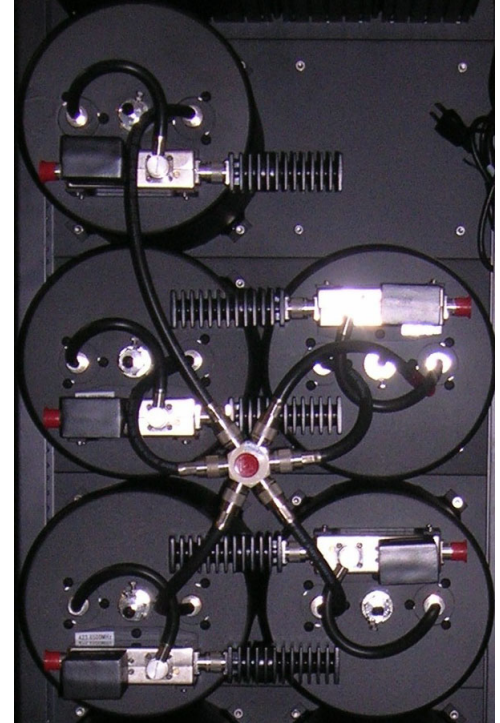

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com

Electrical Specifications

Frequency Range	MHz	406 to 512	
Number of channels		5	
Input Connectors		N-Female	
Output Connectors		N-Female	
Input VSWR (max)		1.25:1	
Output VSWR		2:1	
Power (Per Channel)	W	125	*1
Peak total combined CW input power (max)	W	1100	
Frequency separation (min)	MHz	0.1	
Isolation Tx to Tx	dB	35	
Isolation antenna to Tx	dB	25	

Notes

- *1 : 80 Watts at 100KHz spacing
125 Watts at >= 150KHz spacing
- *2 : 2 channel version

Mechanical Specifications

Width	in (mm)	19 (483)	
Depth	in (mm)	21.5 (546)	
Length/ Height	in (mm)	26.25 (667)	
Finish		Black	
Weight	lbs (kg)	60 (27.24)	
Shipping dimensions	in (mm)	20x10x18 (508x254x457)	*2

Ordering Information

For 100 MHz separation, the power is limited to 80W per channel.

Environmental Specifications

Temperature range	°F (°C)	-22 to +140 (-30 to +60)
-------------------	---------	--------------------------

Region	United States	Europe, Middle East and Africa	Caribbean and Latin America	Canada and rest of the world
Telephone	USA: 1 800 263 3275	International: +44 (0) 1487 84 28 19	International: +1 905 726 7676	Canada: 1 800 263 3275 International: +1 905 727 0165
E-mail	salesusa@sinctech.com	salesuk@sinctech.com	salesla@sinctech.com	salescan@sinctech.com