

Handle Replacement Instructions — Airport Advantage™ and Airport Advantage™ XT



Step 1:

Start by taking a top-down photo of your divider and gear layout for reference when reassembling your bag.

Remove all dividers and set aside.



Step 2:

Lift the bottom flap then peel back and position the molded, padded insert to gain access to the retractable handle assembly.



Step 3:

Using a Phillips head screwdriver, remove the four screws that secure the handle to the bag. *Set the screws aside for reassembly.*



Step 4:

Open the top handle pocket, reach down, and pull apart the hook and loop. Remove the handle assembly out through the interior of the bag.

Step 5:

HANDLE INSTALLATION and REASSEMBLY

Handle installation is the same process, but in reverse.

Included with the kit:

Replacement handle

Other tools required but not included:

Phillips head screwdriver


CONTACT US

If you require any assistance, please contact our customer support team via:

www.thinktankphoto.com/pages/contact-us

HANDLE USE

Due to the weight of video and photographic equipment, we recommend that you **do not lift the roller off ground or pull up stairs by the aluminum handle system**. Please use the fabric handle on top of the bag itself.

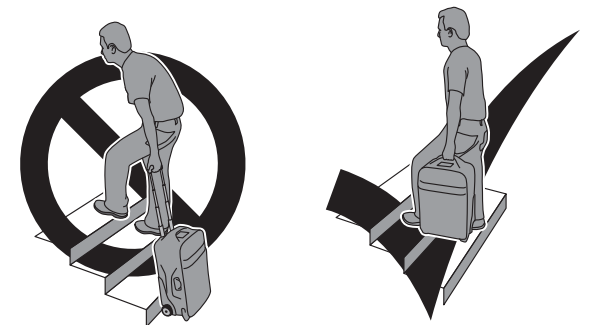

©2021 Think Tank Photo PIN0064a