

## AIRPORT 4-Sight & Roller Derby Handle Replacement Guide

Please look through this guide in its entirety before starting. If you have any questions or need assistance, contact Customer Service by phone at 855-558-4465 ext 1, or by email at [customerservice@thinktankphoto.com](mailto:customerservice@thinktankphoto.com).

### Tools Required:

- [1] 3 MM Hex Key (included)
- [1] 8 MM Socket Driver (not included)



### STEP 1

Remove dividers and locate the liner zipper

1. Remove all dividers.
2. Lift up cloth flap to gain access to the liner zipper.



### STEP 2

Unzip padded liner and remove from shell

1. Fully unzip the padded liner from the bag.
2. Pull up and out to remove the liner. Note the front of the liner is fastened to the shell with a strip of hook-and-loop.



### STEP 3

Remove screws from bottom of handle



1. Using a Philips head screwdriver, remove the two screws that affix the handle legs to the bag by turning the screws counter-clockwise.
2. **Discard screws.** They are not needed for reassembly.



### STEP 4

Remove bolts and nuts

1. While securing one side of the bolt with the included 3 MM hex wrench, use an 8 MM socket or nut driver to remove the two 8 MM nuts.
2. Remove the bolts by pushing them out from the inside of the bag.

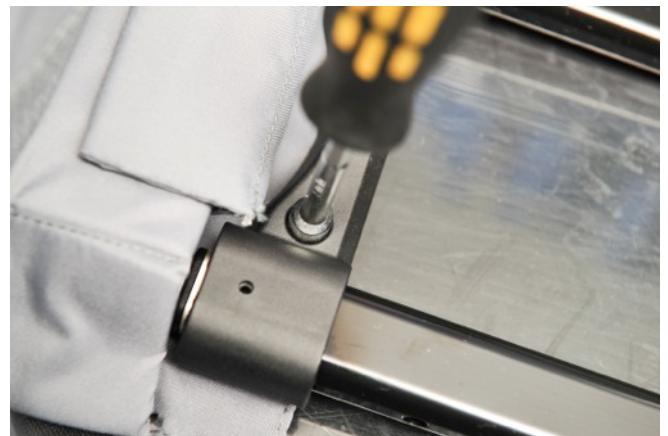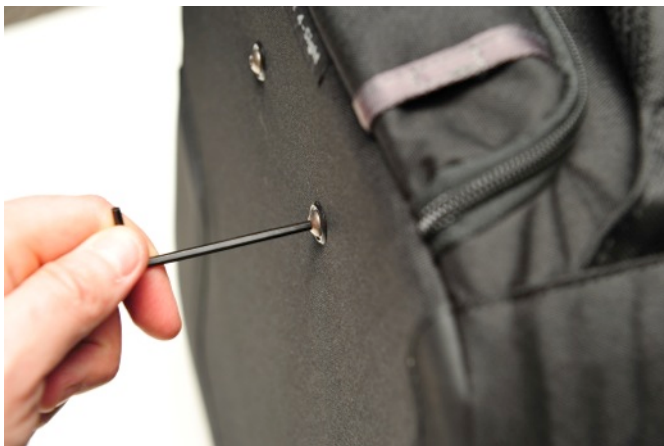

## STEP 5

### Remove handle

1. Unfasten hook-and-loop flap as shown.
2. Remove handle.



## STEP 6

### Installation

1. Installation is the same procedure in reverse.

Questions? Please contact Customer Service by phone at 855-558-4465 ext 1, or by email at [customerservice@thinktankphoto.com](mailto:customerservice@thinktankphoto.com).