

Logistics Manager® 30 V2.0 Instructions

Large Capacity Rolling Gear Bag

For more information please visit: www.thinktankphoto.com



Logistics Manager® 30 V2.0 - Rolling Gear Case



1. Hide-away top handle with easy accessibility and maneuverability.

2. Large front pocket holds cords, reflectors, or other peripheral items.

3. Mesh interior pockets provide organization for accessories: wireless flash triggers, power cables, sync cables, etc. .

4. Identify case contents with replaceable ID tags. A variety of ID tags are included.


5. Replaceable wheels within a protective housing adds stability.





Customizable ID panels show the contents at a glance.



Security cable and combination lock can be used to secure zipper and lock it to immovable objects. See the reverse side of these instructions for more information.

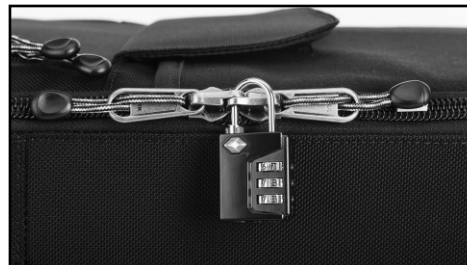

TSA combination lock to secure zipper. There are many instances when photographers must leave behind some or all of their gear. It is absolutely vital that this gear be secured from theft.

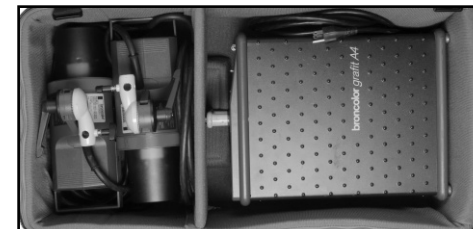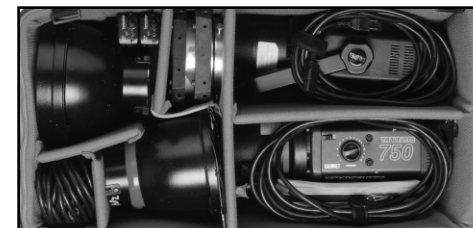

Endless interior layouts to adapt to numerous equipment combinations and help manage all of the "logistics" of transporting and using a lot of equipment while on location.

For more information please visit: www.thinktankphoto.com

LARGE TRIPOD ATTACHMENT



Step 1: Place the Tripod Strap under the webbing on the side of the bag, matching the hook and loop material to keep the strap in position.



Step 2: Weave the webbing on the tripod cup through the buckle on the side of the bag as shown. It's important to back-loop the strap through the buckle to prevent the strap from loosening with usage. Logistics Manager 30 owners will find this buckle on the inside of the side zippered pocket.



Step 3: Adjust the length of the strap so that the Tripod Cup has adequate clearance from the ground.

STANDARD TRIPOD ATTACHMENT



Step 1: Place the Tripod Strap under the webbing on the side of the bag, matching the hook and loop material to keep the strap in position.




Step 2: Place two tripod legs into the expandable pocket on the side of the bag and use the compression strap to secure the lower portion of the tripod to the side of the bag. Pull the buckle straps on both the Compression Strap and Tripod Strap to tighten the tripod onto the side of the bag.

Shown (left to right): With monopod, standard tripod in tripod pocket, large tripod with tripod cup



SETTING THE REAR SECURITY CABLE LOCK



Turn the dials and align the numbers so that 0-0-0 is visible inside the combination windows that are located on the narrow side of the lock. Pull up the shackle and turn it 90° counter-clockwise to align the small protrusion on the shackle with the notch on the lock body. Press the shackle down firmly and then turn the shackle a further 90° counter-clockwise. With the shackle still turned in the position above, turn the dials to your own personal combination. Return the shackle back to the original position. Your personal combination is now ready to use.

Due to the weight of video and photographic equipment, we recommend that you **do not lift the roller off ground or pull up stairs by the aluminum handle system.** Please use the fabric handle on top of the bag itself.

