


Lead Cutter



Cutting



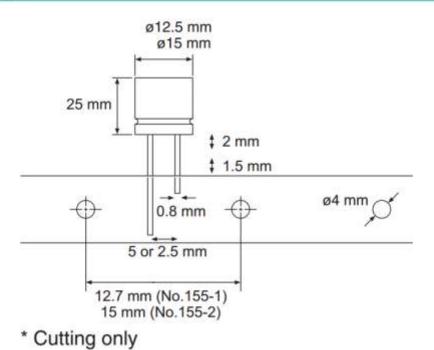

Lead cutter for radial components

Packing List

155

Unit, Parts tray, Clamp, Handle, 2 mm Hexagon wrench, 2.5 mm Hexagon wrench, 3 mm Hexagon wrench, 4 mm Hexagon wrench, Instruction manual

Specifications

Part No.	155-1	155-2
Max. diameter of lead wire	ø0.8 mm (max.)	
Lead wire*	For annealed copper lead wire only	
Max. processing part size	ø12.5 × 25 mm (max.)	ø15 × 25 mm (max.)
Feed hole pitch	12.7 mm	15 mm
Lead pitch**	5 mm, 2.5 mm	5 mm
Min. processing size	1.5 mm from taping end, 2 mm from component end	
Dimensions	110 (W) × 140(H) × 125 (D) mm	
Weight***	1.7 kg	

^{*} These tools are not suited to work on components with lead frames (square lead).

^{**} When shipped, the unit is set for components with a lead pitch of 5 mm.

^{***} Including handle and clamp