

## PERFORMANCE

°F   %RH	<b>80   60</b>	<b>75   50</b>
Water Removal (P/Day)	350	230
Efficiency (P/kWh)	8.5	6.2
Energy Factor (L/kWh)	4.0	2.9

## ELECTRICAL


°F   %RH	<b>80   60</b>
Supply Voltage	277V
Current Draw	6.8A
MCA*	10A
MOP*	15A
Recommended Breaker Size	10A
Power	1,800W
Power Cord	NEMA L7-15P
CFM	900
BTU (Total)	22,000
BTU (Heat of Condensation)	16,000
BTU (Motor Load)	6,100

## SPECS

Control Type	Digital Onboard or External
Refrigerant Type	R410a
Refrigerant Amount	4 lb 12 oz
Weight	215 lb
Air Filter MERV Rating	MERV-13
Dimensions	20" x 22" x 2"
Drain Port Connection	3/4" Threaded NPT
Operating Temperature	56 F Min - 95 F Max



## DIMENSIONS

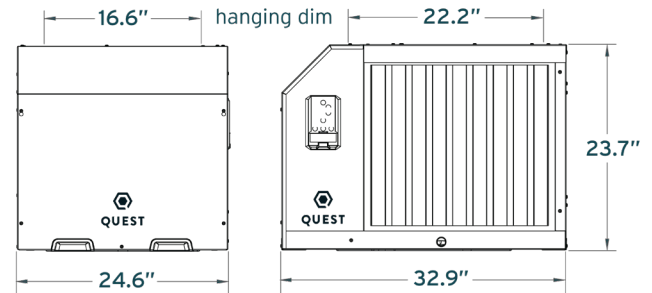

## FEATURES

- + **Patented M-CoRR Technology:** Multi-coil design achieves the highest efficiency available in the market
- + **Digital Onboard Control:** easy operation of your machine, with optional external control
- + **Easy Access Panel:** removable panel for easier in-place maintenance and serviceability
- + **Filter Compensation Technology:** Accounts for static pressure change to ensure consistent, powerful airflow
- + **Superior MERV-13 filtration:** Removes more harmful contaminants from the air, such as mold, bacteria and some virus
- + **Integrated Hang Points** and handles allows for easy movement and flexible installation

Specifications are subject to change without notice. Drawings are not to scale. \*See manual for details on MCA/MOP.