


α ALPHA RANGE: SET COMPONENT SUMMARY

PARISI

PASSAGE SET

COMPONENTS


- | HANDLE SET
- | IA-SSS

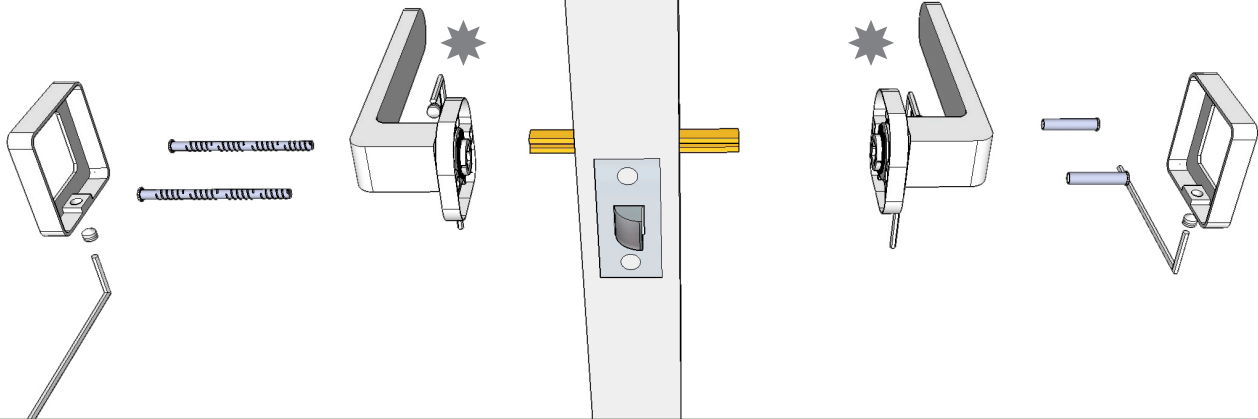

PRIVACY SET

COMPONENTS


- | HANDLE SET
- | IA-SSS
- | IS-06-SSS
- | 7789-ET TURN
- | 7789-ES RELEASE

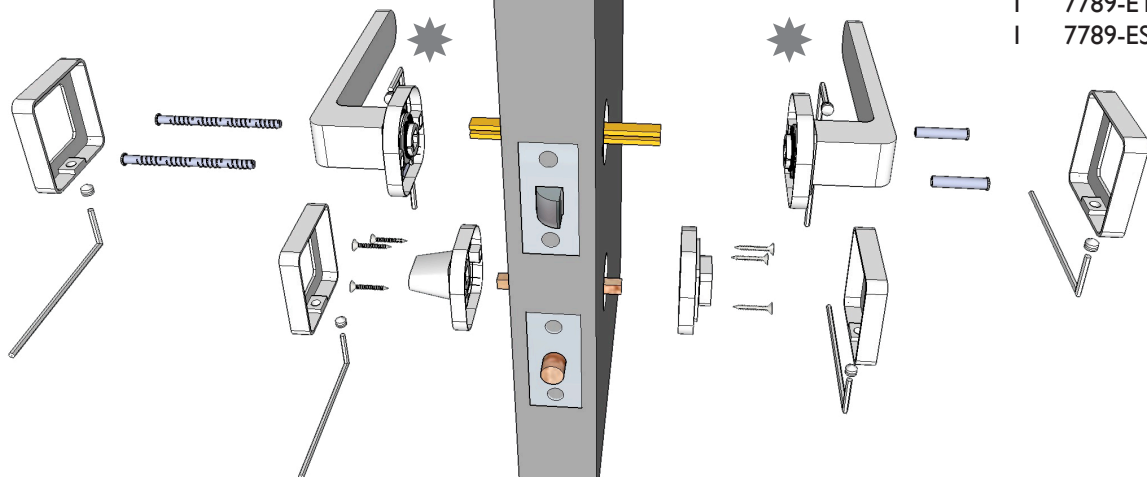

ENTRANCE SET


COMPONENTS

- | HANDLE SET
- | 2200-SC
(Backset to specify)
- | F4 cylinder
- 2 7789-Y Escutcheons

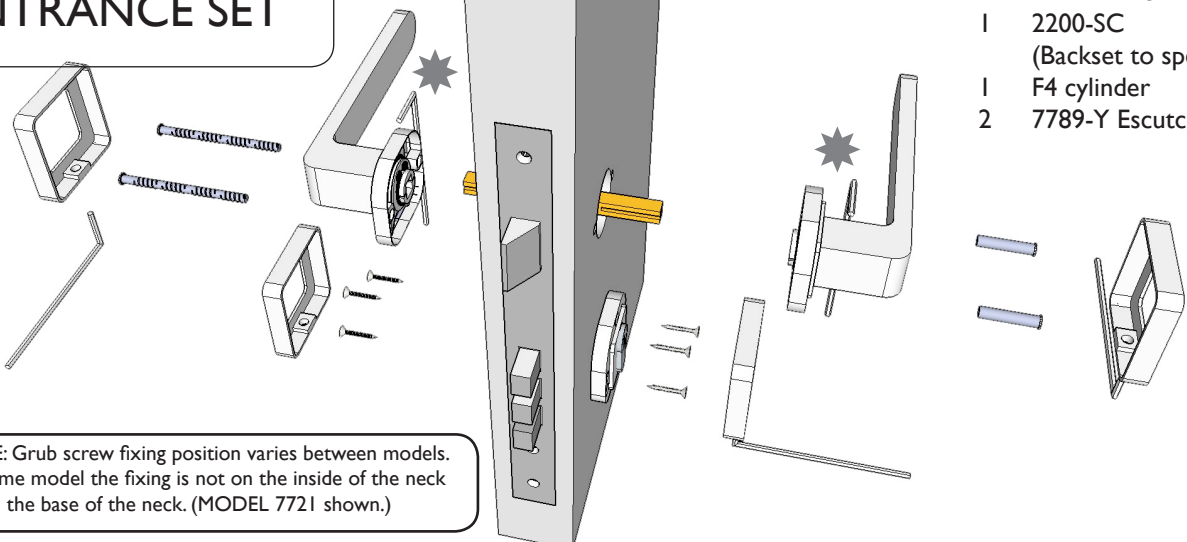

* NOTE: Grub screw fixing position varies between models.
 On some model the fixing is not on the inside of the neck
 but on the base of the neck. (MODEL 7721 shown.)

CUT-OFF SCREW

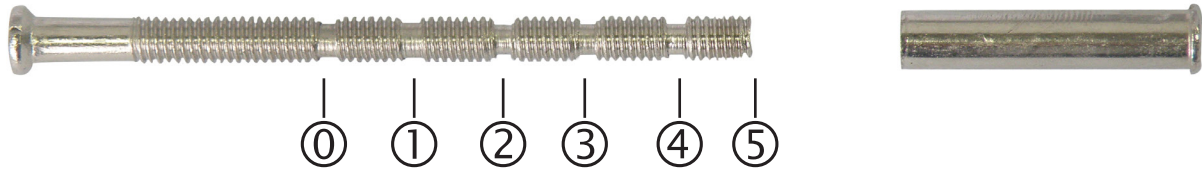

Sections	DOOR THICKNESS	SPINDLE	COMMON USE
0	23~33	STD 92mm	
1	28~38	STD 92mm	INTERNAL DOOR
2	34~44	STD 92mm	INT/EXT DOOR
3	41~54	TO ORDER 150mm	EXTERNAL DOOR
4	48~58	TO ORDER 150mm	
5	57~66	TO ORDER 150mm	

92m spindle suitable for door thickness 32mm ~ 48mm.
For thicker doors please order optional longer spindle at extra cost.

Cut along dotted line.

NOTE:

Privacy uses same cut-out template.

IMPORTANT NOTE:


Door must be drilled in sequence.

- 1) Two holes diameter 5mm at 38mm centres to start with and can be enlarged if required
- 2) One hole diameter 22mm
- 3) One hole diameter 25mm


NOTE:

All dimensions are nominal.

INSTALLATION TEMPLATE FOR PASSAGE / ENTRANCE SET

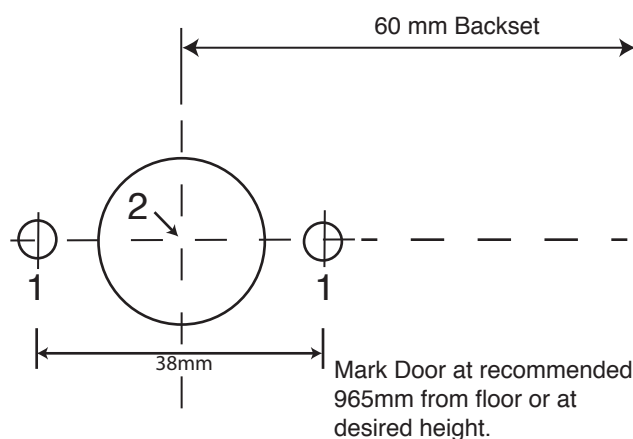

FOLD HERE AGAINST EDGE OF DOOR

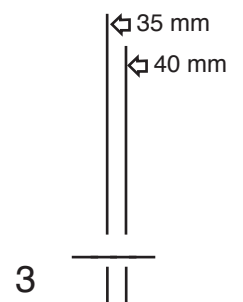

MARK FOR 25 mm HOLE at centre of Door Thickness