


PASSAGE SET

COMPONENTS

- | HANDLE SET
- | 1A-SSS

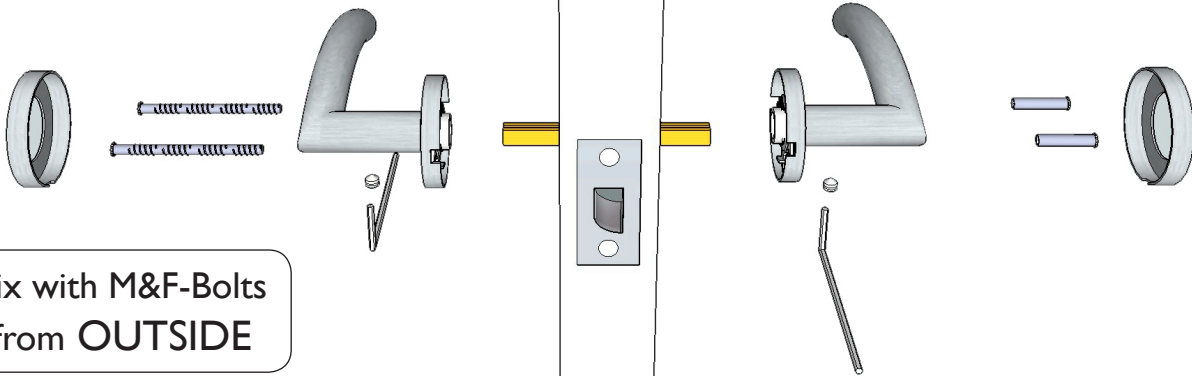


Fix with M&F-Bolts
from OUTSIDE

PRIVACY SET

COMPONENTS

- | PRIVACY
- | HANDLE SET
- | 6002-SSS

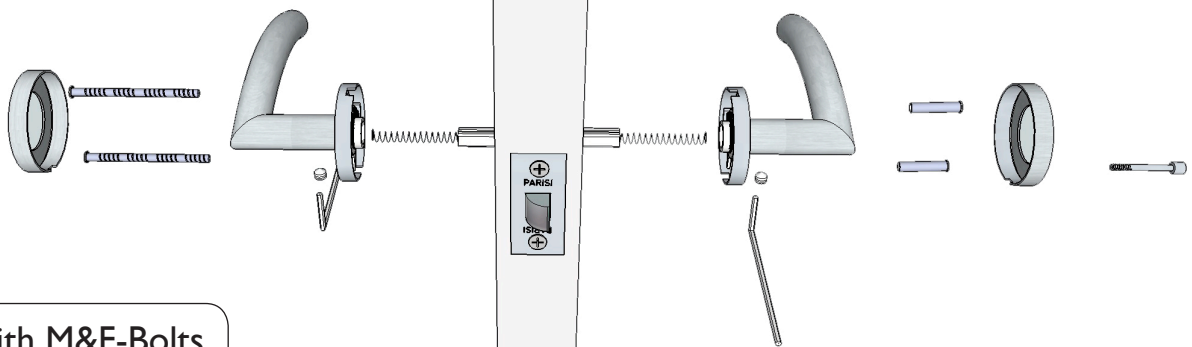


Fix with M&F-Bolts
from OUTSIDE


ENTRANCE SET

COMPONENTS

- | HANDLE SET
- | 2200-SC
- (Backset to specify)
- | F4 cylinder
- 2 8137-Y Escutcheons

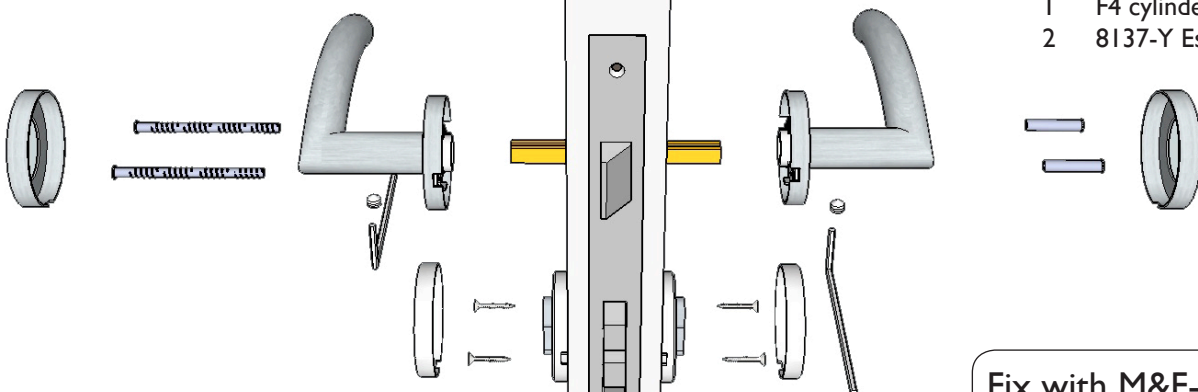

Fix with M&F-Bolts
from INSIDE

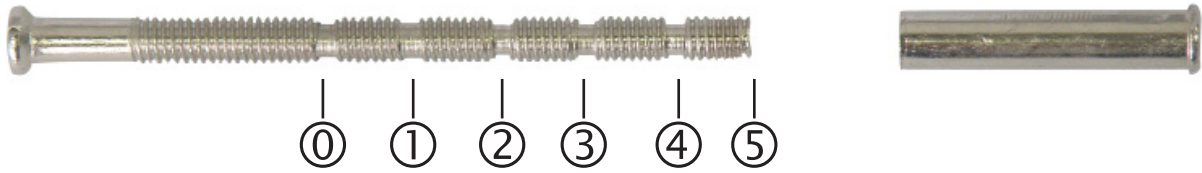
CUT-OFF SCREW

Sections	DOOR THICKNESS	SPINDLE	COMMON USE
0	18~23	STD 92mm	
1	24~28	STD 92mm	
2	28~37	STD 92mm	INTERNAL DOOR
3	35~44	STD 92mm	EXTERNAL DOOR
4	42~49	TO ORDER 150mm	
5	48~57	TO ORDER 150mm	

92m spindle suitable for door thickness 32mm ~ 48mm.

For thicker doors please order optional longer spindle at extra cost.

Cut along dotted line.

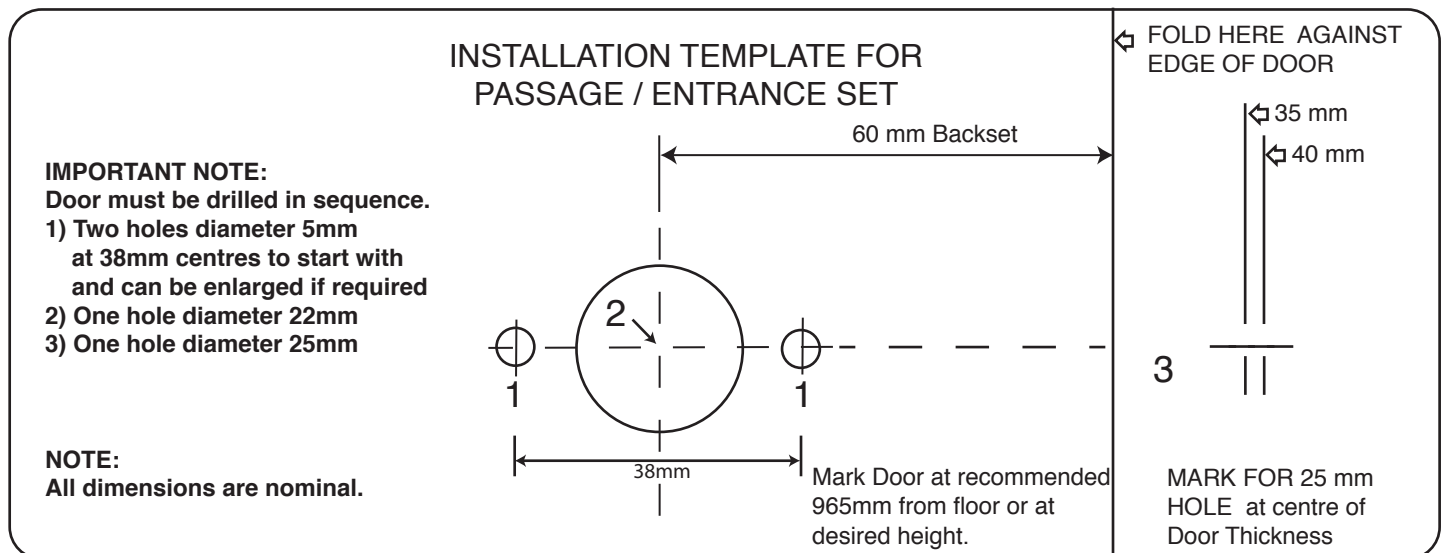

Cut along dotted line.

