




tel: (619) 448-3567
 fax: (619) 448-9072 tbirdusa.com


SEPARATE OVERFLOW DRAIN




16 oz copper, 316 grade stainless steel, or TPO/PVC-clad stainless steel flange. Available in 2", 3" and 4" outlet.

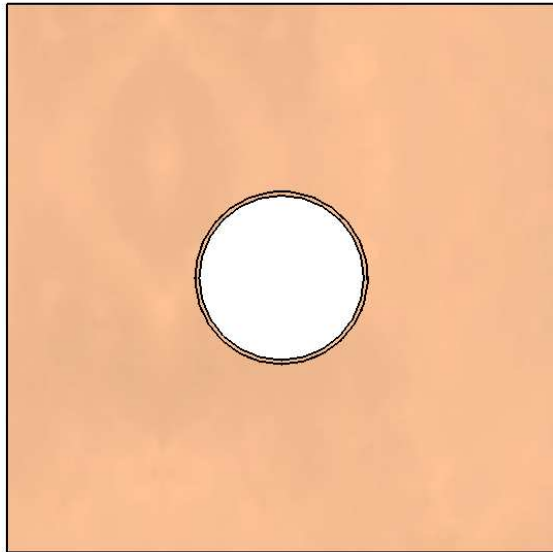


9" x 9" (2" drain)
 10" x 10" (3" drain)
 12" x 12" (4" drain)

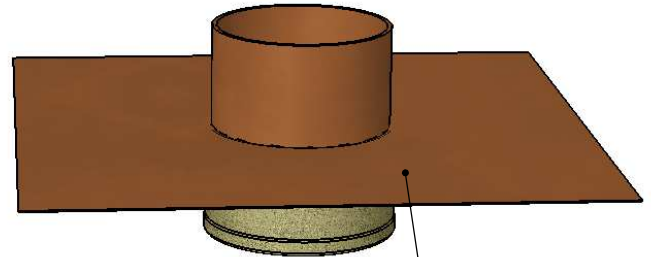

flashing attached to 2", 3" or 4"
 bronze no-hub fitting
 (2" threaded available)

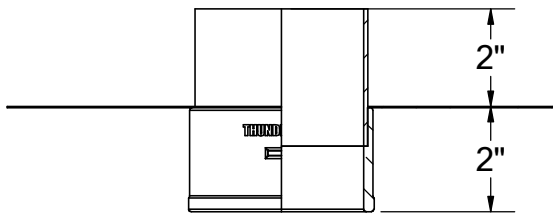

optional: -90

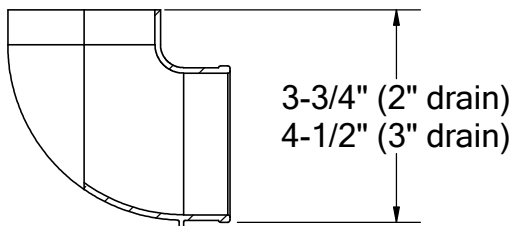

PART #	
OF2TA	2" male thread *
OF2NH	2" no-hub
OF3NH	3" no-hub
OF4NH	4" no-hub
OPTIONS	
	16 oz copper flange
S-	316 stainless steel flange
TPO-	TPO-clad stainless flange
PVC-	PVC-clad stainless flange
-90	90° outlet connection

* excluded from ICC-ES listing