




# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### HONDA CBR 1000RR

#### FENDER ELIMINATOR 2017-PRESENT

- 1 Remove (2) seat bolts using a 5mm allen key. (Picture 1)
- 2 Remove (4) allen bolts using a 4mm allen key, and (2) screws with a philips head screw driver. (Picture 2)
- 3 Remove (2) bolts using a 5mm allen key. (Picture 3)
- 4 Remove (4) hex bolts using a 10mm socket. (Picture 4)
- 5 Remove (2) philips head screws; one on each side. (Picture 5)
- 6 Remove another (4) philips head screws. (Picture 6)
- 7 Remove (2) plastic push rivets. (Picture 7)

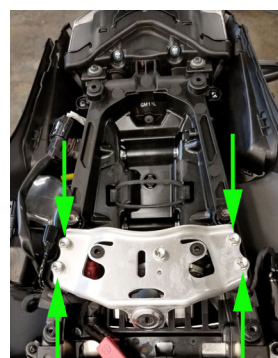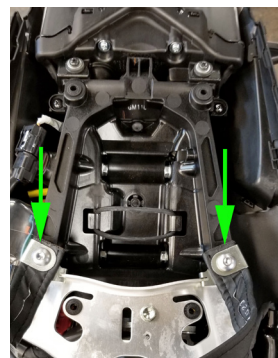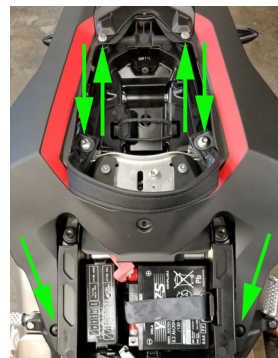


# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### FENDER ELIMINATOR 2017-PRESENT

- 8 Remove (4) hex nuts; two from each side using a 10mm socket. You will be reusing these nuts and bolts in the next step. (Picture 8)
- 9 Unplug stock connectors and remove entire stock assembly. (Picture 9)
- 10 Install mount plate using (4) bolts and hex nuts previously removed. The next step, you will install the turn signal bracket and your license plate at the same time, so based on the version you purchased, jump down to see how to do all of this together. (Picture 10)
- 11 Install lens bracket to the mount bracket using (2) provided M6x25 bolts, threading into the riv nuts.
- 12 Feed connectors through and plug into OEM harnesses.
- 13 Test your blinkers and plate light so ensure everything is working properly.
- 14 Reinstall all hardware previously removed.

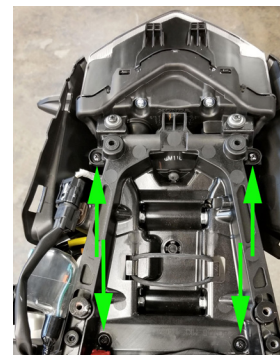

# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### FENDER ELIMINATOR 2017-PRESENT

If installing the standard license plate mount:

- 15 Take ABS spacer and license plate and mount using the provided M6x25 bolts. Sandwich the turn signal bracket in between the mounting bracket and license plate. (Picture 11)

If installing the tucked license plate mount:

- 16 Take license plate and mount using the provided M6x25 bolts. Sandwich the turn signal bracket in between the mounting bracket and license plate. (Picture 12)

