

# Motic®

## EasyZoom

Hyper-focal digital microscope



50x to 5800x  
magnification with single lens body

# Major Events in the History of Motic

Motic is a leading enterprise in the field of optical microscopes in China and one of the well-known brands in the world's optical microscopes industry. The products are mainly designed for basic education, higher education, scientific research, industry and biomedical fields. With the advantage of extensive coverage of domestic and international markets, it has customers in mainland China, Spain, Japan, Germany, the United States, Canada, Australia, South Korea, Saudi Arabia, Taiwan, Hong Kong and other countries and regions. Over the years, MOTIC has been committed to the upgradation and innovation of microscopy systems, helping inspectors in all walks of life to achieve continuous progress and improvement in inspection methods.

2020  
Cloud and Various IOT Microscopes



2018  
Digital Slice Scanner



2019  
PA Series Fluorescence and  
Metallurgic Microscopes

2013  
Inverted Metallurgic  
Microscope



2008  
Inverted Life Science  
Microscope




2017  
PantheraTEC Metallurgic  
Microscope



## EasyZoom Series

Comprehensive improvement of optical inspection and analysis capabilities

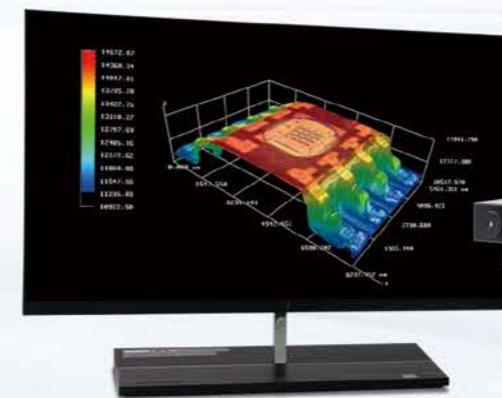

2008  
Upright Metallurgical  
Microscope



1999  
Built-in Digital  
Microscope



1988  
Biomicroscope





## Smart and Flexible Optical Solutions

Thanks to an advanced optical system developed in-house, the Motic Easyzoom series of hyper-focal digital microscopes can easily capture high-quality images to read more precise results than ever before.




HD display

### Advanced integration all in one system

All observation, recording, measurement and reporting functions have been integrated into one unit, making it one of the most versatile digital products on the market.

### 50x to 5800x conversion with one zoom lens body

The Easyzoom series adopts a new optical solution, which can realize the conversion from 50x to 5800x with only one zoom lens body. At the same time, the long working distance of collision samples is guaranteed to avoid. The long working distances and a wide range of switching magnifications can be finished in one lens body.

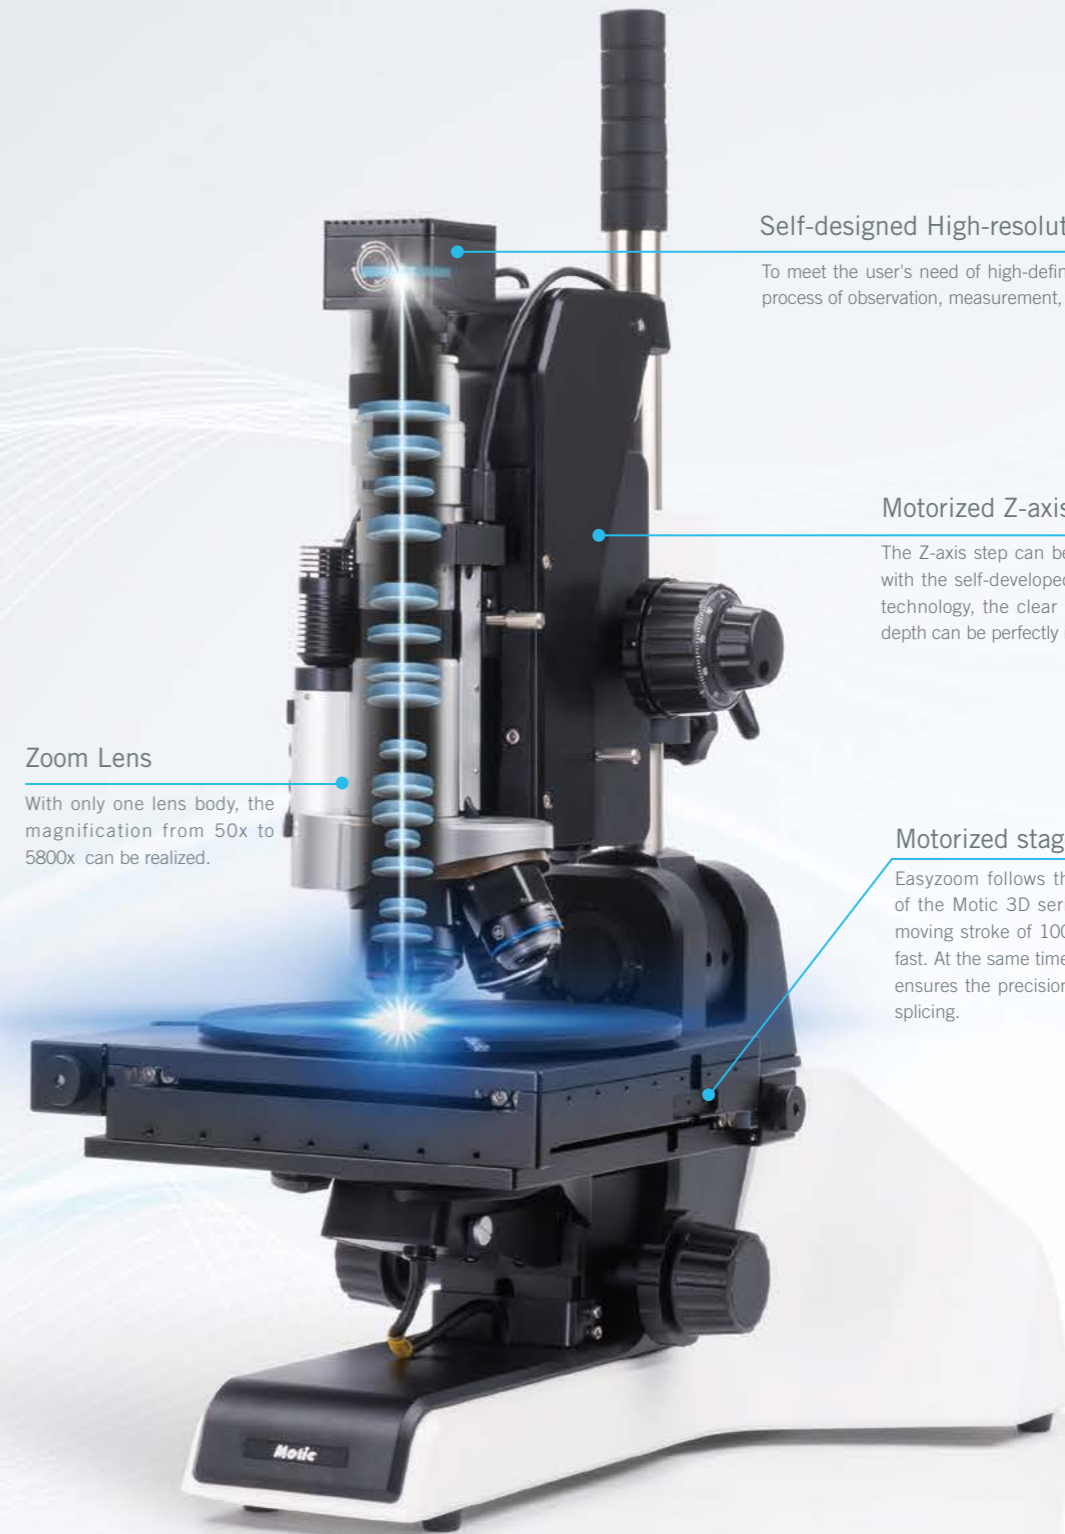

Zoom Lens

With only one lens body, the magnification from 50x to 5800x can be realized.

Self-designed High-resolution Camera

To meet the user's need of high-definition imaging in the process of observation, measurement, and photography.

Motorized Z-axis

The Z-axis step can be up to 0.5 $\mu$ m, and with the self-developed image processing technology, the clear parts of each focal depth can be perfectly integrated.

Motorized stage set

Easyzoom follows the platform technology of the Motic 3D series, and can achieve a moving stroke of 100X100mm while moving fast. At the same time, the stable body design ensures the precision required for automatic splicing.

### Hyper-focal Observation with 3D Effect

The unique optical system allows Easyzoom to have 3 times more hyper depth than before, and coupled with the sophisticated digital imaging system, the hyper focal problem that exists in traditional microscopes is no longer a trouble for our users. The convenient and fast 3D software can also quickly measure the length, width, height, volume and other three-dimensional data of the sample. Our users are no longer bound by cumbersome measurement steps.



# Ultra-high-definition pictures, thanks to self-developed optical technology

Powerful multifunctional objectives, and high-precision digital technology combined with HDR image processing technology create a highly optimized observation system. By eliminating excessive reflected light, ultra-high-definition photos can be presented to the user with just one click.

Objective lens model	Specification	
5X	Optical Magnification	0.711x~5.156x
	Total magnification	50X~290X
	FOV	9.9mm~1.71mm
	Working Distance	10mm
20X	Optical Magnification	2.844x~20.622x
	Total magnification	200X~1160X
	FOV	2.48mm~0.43mm
	Working Distance	10mm
50X	Optical Magnification	7.111x~51.556x
	Total magnification	500x~2900x
	FOV	0.99mm~0.17mm
	Working Distance	10mm
100X	Optical Magnification	14.222x~103.111x
	Total magnification	1000x~5800x
	FOV	0.5mm~0.09mm
	Working Distance	3mm



### Flexible and easy-to-operate objective lens

The seamless conversion from 50x to 5800x makes complex observation tasks simple. When it is necessary to enhance structural observation and metallurgical field evaluation, simply rotate the objective lens to enhance the quality of the pictures.

### Ultra-high true color reproduction performance

Motic has the world's leading lens production process and coating technology in the optical field, allowing users to experience the true color of the sample to the greatest extent. Semi-apochromatic objectives also provide better resolution and true color reproduction.

### Long-life high-brightness LED light source design enhances image fidelity and resolution

The vertical illumination cold light source provides a single wavelength light source, which effectively increases the optical resolution and reduces the influence of the temperature change of the light source on the sample analysis.

### Ultra-high-speed camera at 30 frames per second guarantees continuous images

High-speed image data acquisition combined with advanced image processing technology allows users to easily get ultra-high-definition pictures.

### Tilt stand for easy swivel and tilt up to 150 degrees

Easyzoom has the flexibility to capture large-scale, multi-angle images of most difficult-to-observe samples. The main body can be tilted in a range of 150 degrees, and at the same time, the object can be easily rotated.



Easy-to-operate objective lens



Ultra-high-speed camera



Tilt within 150 degrees



## 10x the depth of field of conventional microscopes can be realized without depth-of-field synthesis

Traditional microscopes are often unable to handle samples with large height drop. Reflection is also a problem. EasyZoom provides more than 10 times the real-time depth of field of traditional microscopes through unique HDR technology, making inspection tasks that used to be frustrating easy.

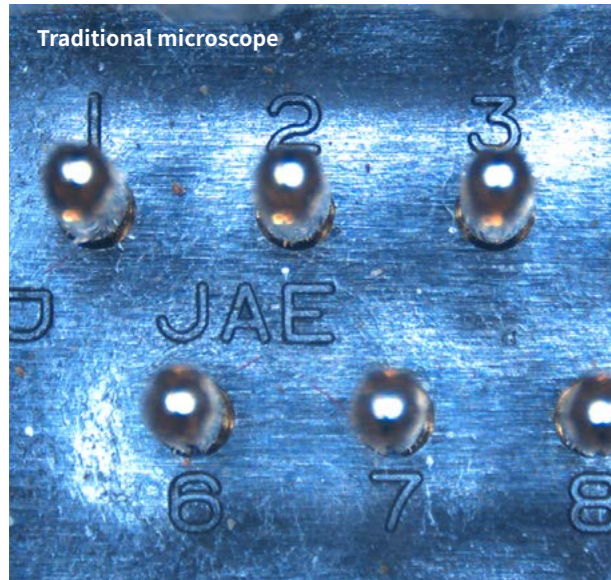


Image effect of traditional microscope

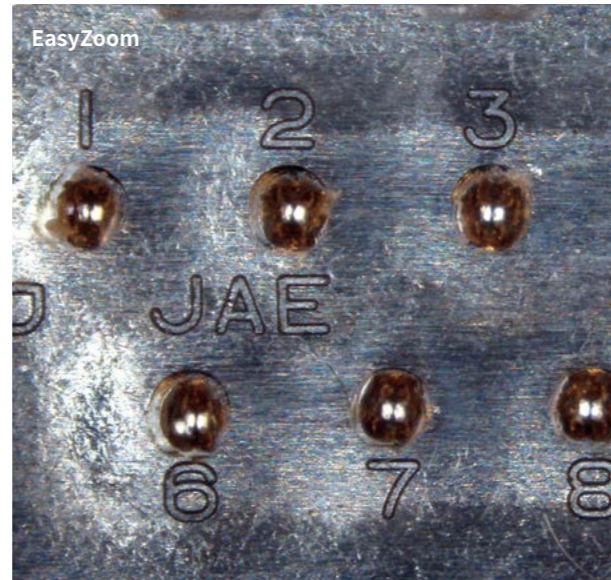


Image effect of EasyZoom




Further magnification



Combined with the 360° stand, a tilted and fully focused sample image is obtained, allowing users to get a closer look at the side of the sample.

## Full focus even at high magnification

Advanced optical technology and precise Z-axis control make it no longer an illusion to achieve panoramic and deep observation at high magnification. The unique image processing technology also escorts the stability of the depth of field synthesis. In the case of high magnification, traditional microscopes are limited by the problem of depth of field, and often only a part of the sample can be seen, which increases the uncertainty of analysis results. Through the Z-axis step size up to 0.5μm, and the self-developed image processing technology, Easyzoom perfectly fuses the clear parts of each focal depth, shielding the defocused light to the greatest extent. Even at high magnification, users can also get a clear picture.


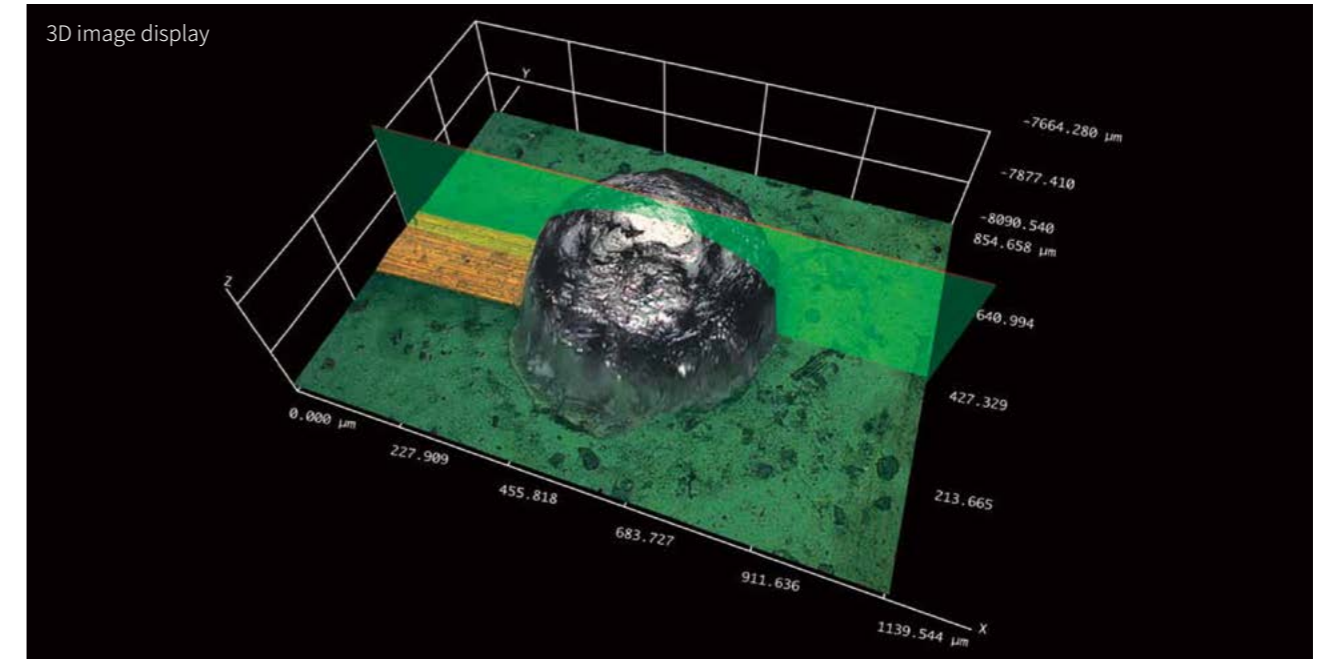


### EDF (Extended Depth of Field) function — Accurate construction of 3D images

The EDF function can synthesize images of different focal lengths with the use of the motorized Z-axis module. Deeper samples can be fully focused and rapidly synthesized at high magnification.

### Features of 3D image display: High and low points can be seen at a glance

After acquiring multiple images and converting them into 3D images, the images can be displayed in a 360° panoramic view. Different heights can be displayed in different colors.

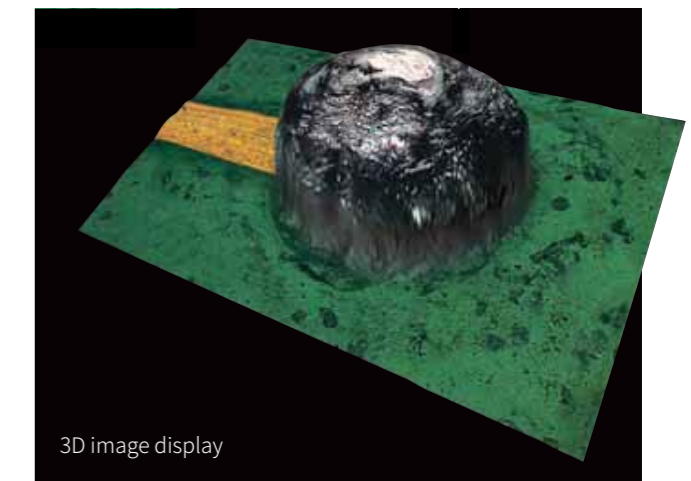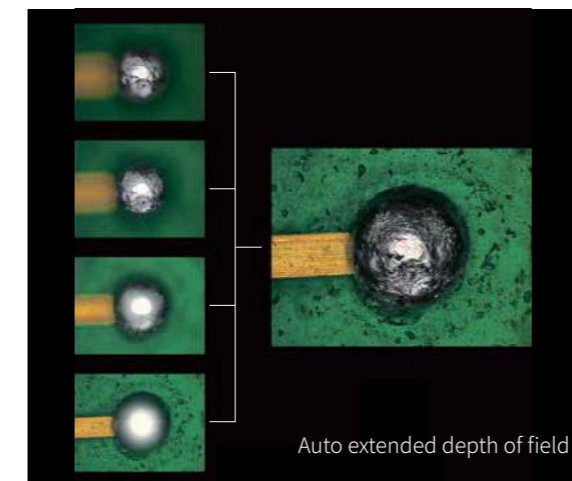



# High-speed image acquisition and processing

Easyzoom uses the latest self-developed optical system and image processing system, which shortens the time for users to wait for results to a third of the previous. This combination of technologies maximizes the timeliness of observations and measurements.

## Real-time measurement during observation

The system allows the user to complete all measurements directly on the screen with live images. The process only takes a few clicks, which is easier and faster than previous ones.



## 2D measurement

It provides various measurement tools such as line, circle, arc, angle, polyline, polygon, perpendicular, width and parallel, all suitable for the counting of the measurement results.

### HDR (High Dynamic Range)

The camera captures multiple color images at different brightness levels by varying the shutter speed. Then, image processing generates images with high-level data. The achievable brightness range is widened to accurately represent targets without glare and reflections.

## Automatic area measurement and counting


Area measurement and counting of objects within a specified range is easy and simple. Excessive targets can be rejected or overlapping targets can be separated. Anyone can use it easily and obtain high-precision analysis results.



测量	测量结果	数据表	自动计算结果																					
<input checked="" type="radio"/> 结果 <input type="radio"/> 统计 <input type="radio"/> 分类	<input checked="" type="radio"/> 自动识别物体 <input type="radio"/> 手动调整	<input type="radio"/> 测量设置 <input type="radio"/> 编辑对象 <input type="radio"/> 分类设置	数字量: 0																					
	<table border="1"> <thead> <tr> <th>编号</th> <th>面积</th> <th>周长</th> </tr> </thead> <tbody> <tr><td>1</td><td>121332</td><td>1379.85</td></tr> <tr><td>2</td><td>120606</td><td>1362.6</td></tr> <tr><td>3</td><td>121692</td><td>1368.48</td></tr> <tr><td>4</td><td>119532</td><td>1368.64</td></tr> <tr><td>5</td><td>124729</td><td>1405.98</td></tr> <tr><td>6</td><td>119989</td><td>1362.22</td></tr> </tbody> </table>	编号	面积	周长	1	121332	1379.85	2	120606	1362.6	3	121692	1368.48	4	119532	1368.64	5	124729	1405.98	6	119989	1362.22		
编号	面积	周长																						
1	121332	1379.85																						
2	120606	1362.6																						
3	121692	1368.48																						
4	119532	1368.64																						
5	124729	1405.98																						
6	119989	1362.22																						

## 3D measurement


Even if the target has unevenness, it is possible to instantly obtain a full-frame in-focus image composed of images with different focal points. In addition, the surface shape can be freely observed from various angles thanks to the 3D display.

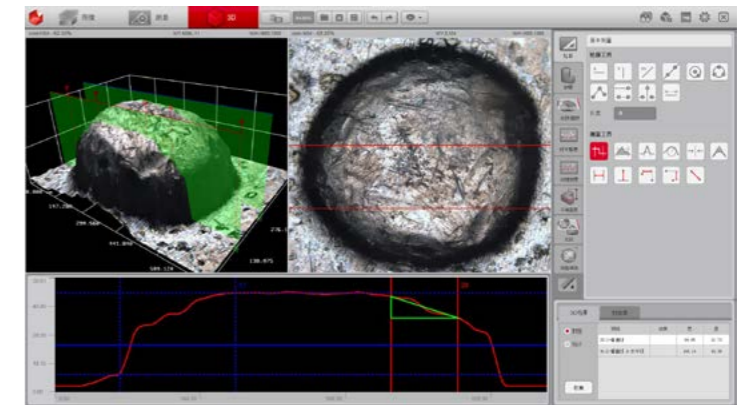

## Line roughness and surface roughness can be measured precisely


### Line roughness

We can avoid defect that can cause error through the 2D or 3D picture.

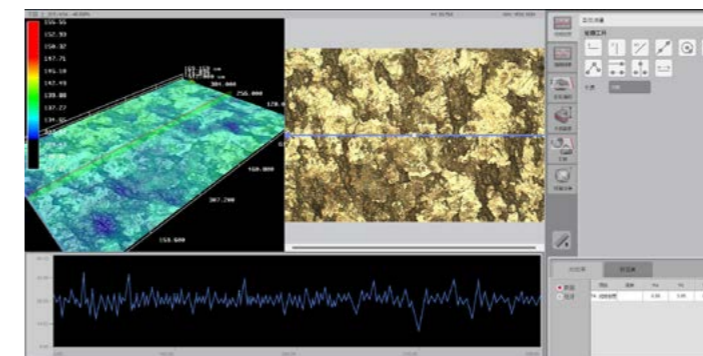

### Surface roughness

We can see difference from picture, but how big is the difference? We can confirm the difference by measure the surface roughness.

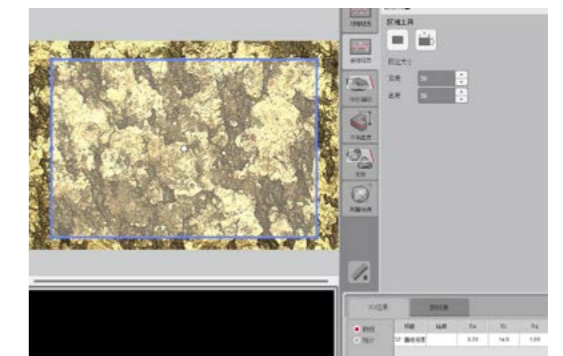



### Quick report creation

All data and analysis in the EasyZoom system can be quickly integrated into the report generator. The standard or custom templates can be used to expedite the completion of reports for various analytical functions. These reports can automatically capture data including date, time, lens, magnification and various measurements.



## Case Display

Advanced, flexible, detailed analysis, exceptional durability, diverse, and reliable accessories enable a wide range of applications through Motic's digital optics technology.

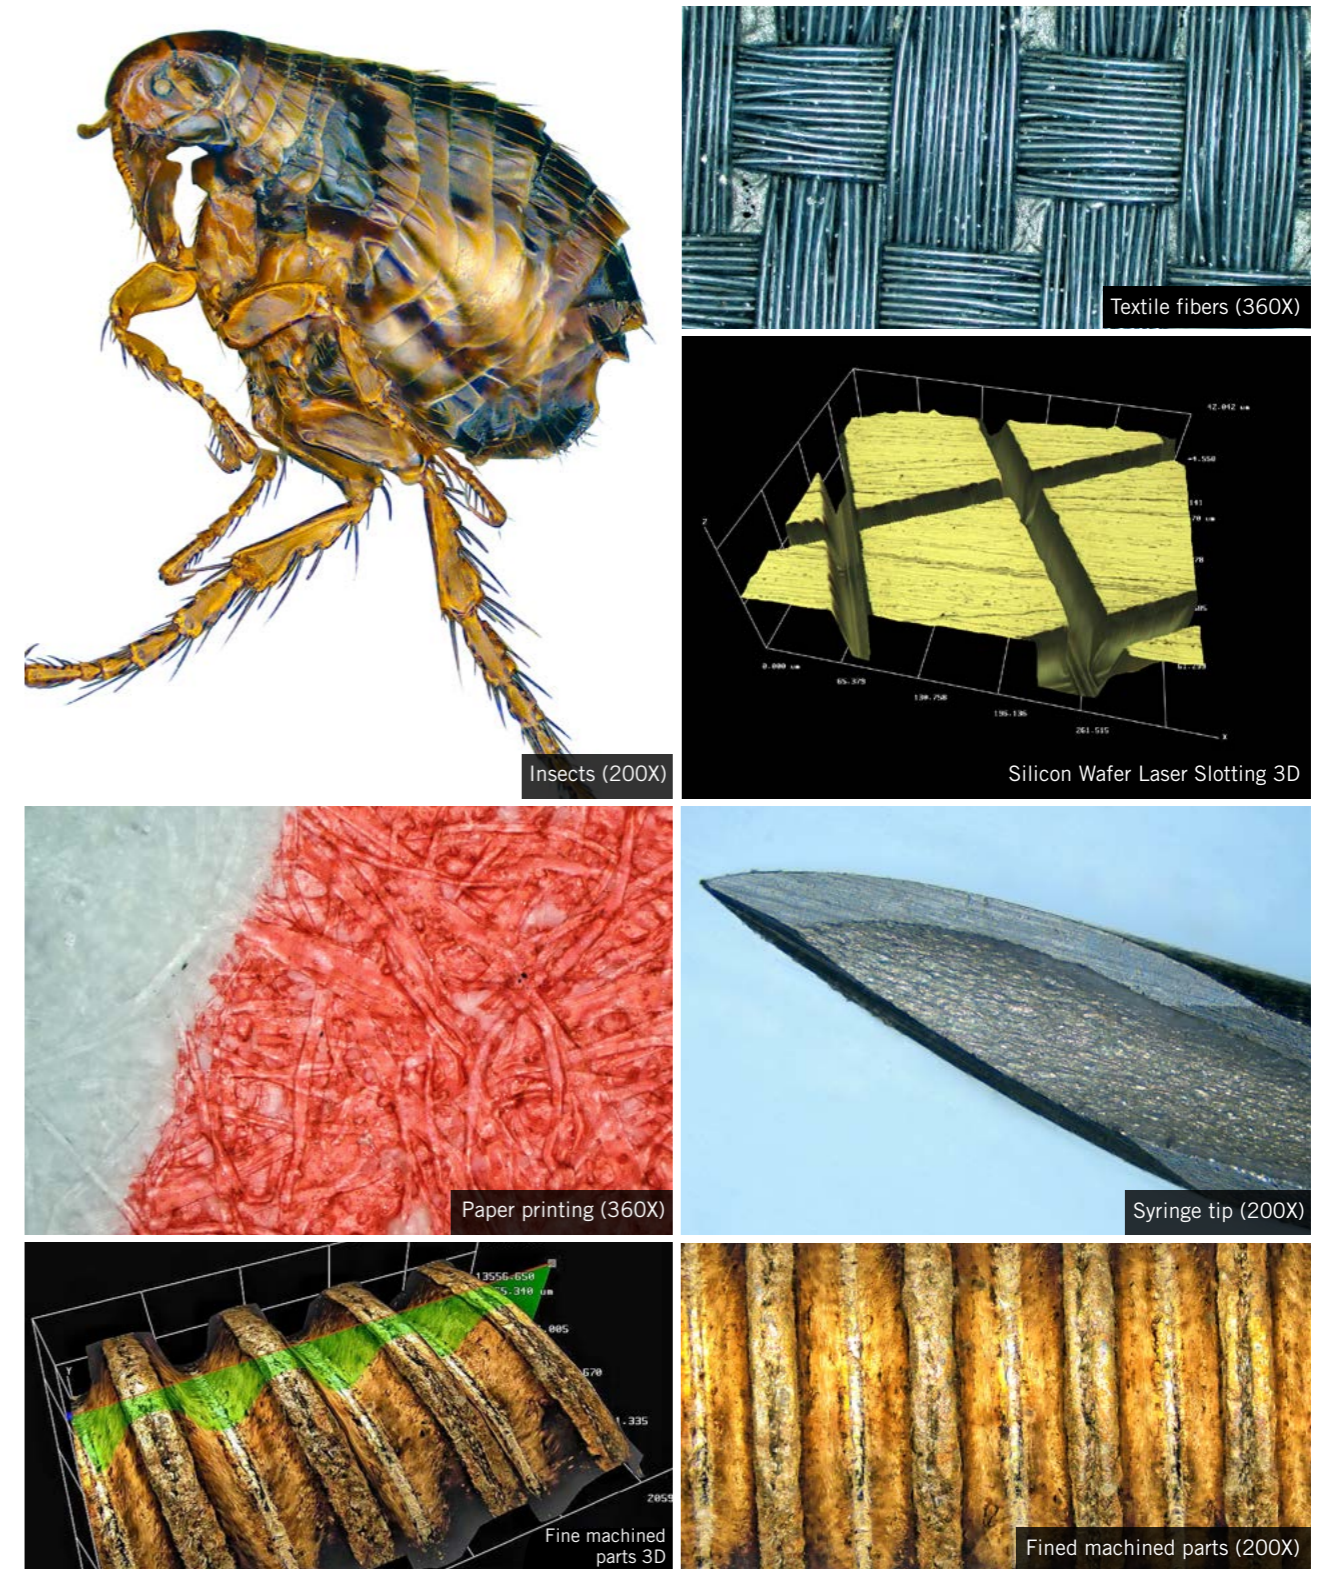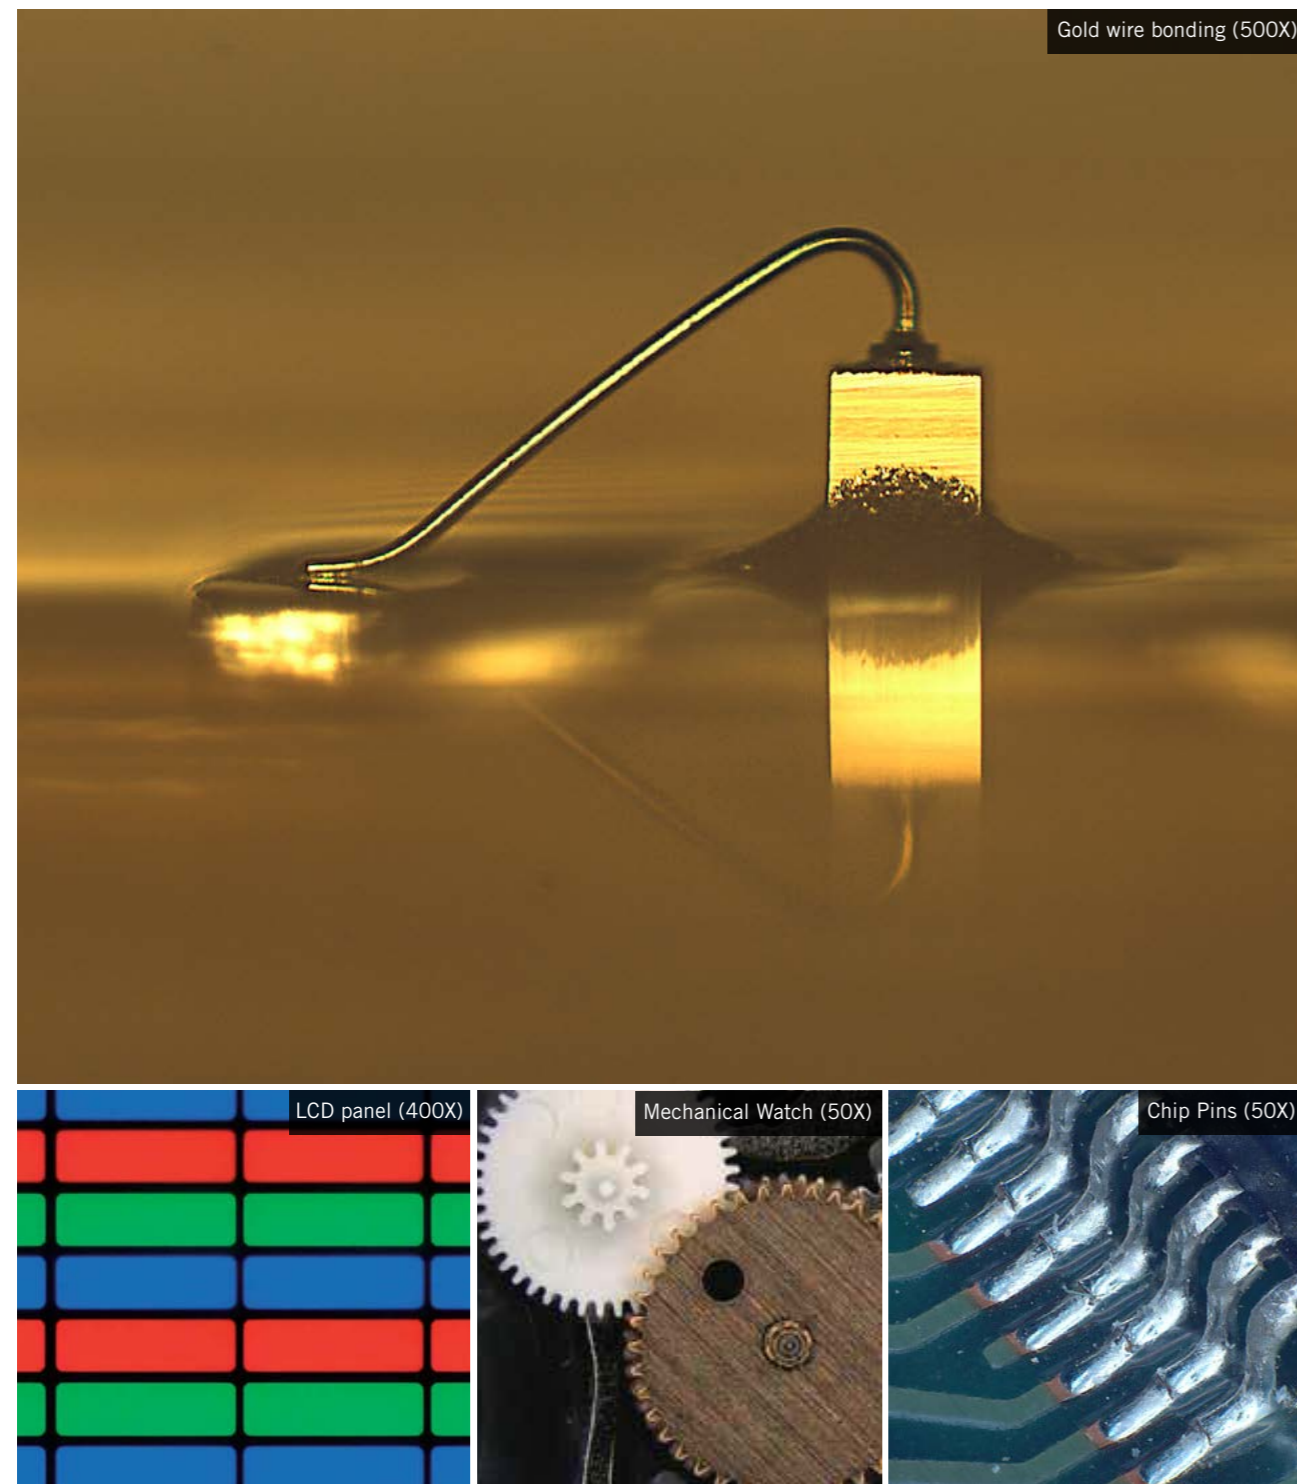

Low power to high power Zoomlens Insingle test or observation can be widely used in semiconductor, automotive metal, chemical, material, electronic transmission and medical industries. Users can view quickly without extra work on the sample. Through direct observation of live demonstrations, discuss among people can be done cooperatively.



**One-click calibration**

Dedicated scales are set to read the required calibration values for each lens with one click. The task is easy to do and anyone can make accurate, error-free corrections.



**Ensure the stability of high-speed splicing**

High-speed splicing is an important function that allows users to observe samples in a wider range. Easyzoom not only has super high speed of synthesis, but also can guarantee the quality of pictures. In addition, the use of navigation reference points reduces artifacts and image glitches. A single image contains 400 million pixels when composited.

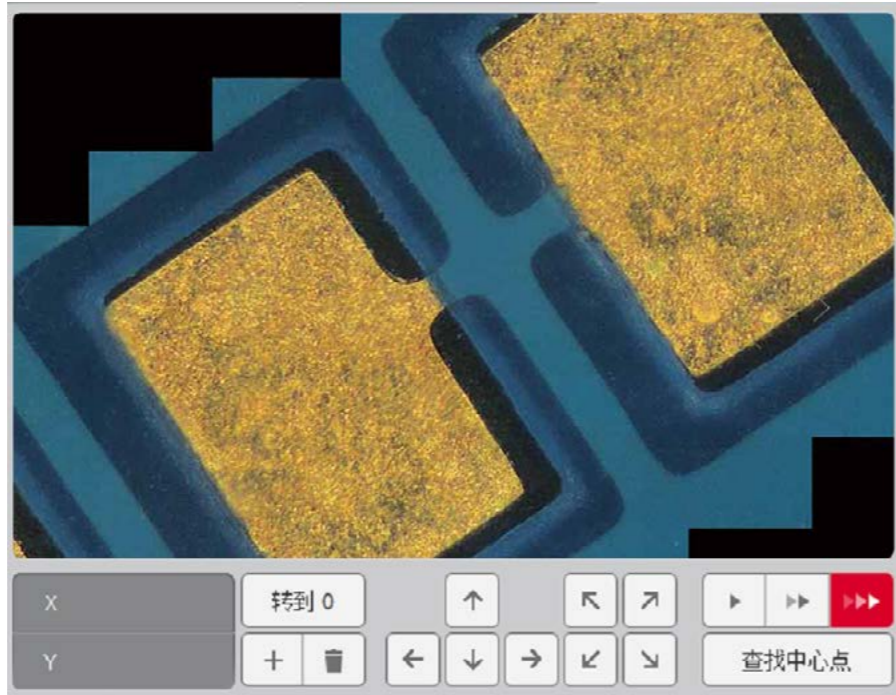


image stitching



**Users can easily achieve panoramic observation in multi angles**

Users can see where conventional microscopes cannot see without tilting the sample

**Suitable scale**

According to the different setting positions of various lenses, the marked reference scale make the replacement of lens more quickly.

**Anti-vibration gasket**

Anti-vibration spacers are used to absorb a wide range of vibrations from low to high frequencies for undisturbed observation.

**Low center of gravity**

The main body is made of die-casting material, which realizes a low center of gravity and high hardness structure to achieve excellent stability.





**Portable high performance zoom lens**

A combination of compact size and high resolution, it can easily achieve magnification from 25x to 200x, and has 10 times the depth of field of conventional lenses.



**High definition zoom lens**

With a FOV of 10mm in the range of 200x to 1160 x, it is easy to obtain high-resolution pictures, enabling micron-scale 3D composite measurements.



**Wide range dual illumination zoom lens**

With bright and dark field function, only one lens body can achieve 50x to 5800x magnification.

**EasyZoom 2**

<b>Total magnification</b>	25x~200x
<b>FOV</b>	19.80mm~2.48mm
<b>Working distance</b>	36mm
<b>AMS function</b>	Active

**EasyZoom 5S**

<b>Total magnification</b>	200x~1160x
<b>FOV</b>	2.48mm~0.43mm
<b>Working distance</b>	10mm
<b>AMS function</b>	Active

**EasyZoom 5**

<b>Total magnification</b>	50x~5800x
<b>FOV</b>	9.9mm~0.09mm
<b>Working distance</b>	10mm (100x objective lens 3mm)
<b>AMS function</b>	Active



Hand-held observation can further improve the efficiency of processing samples.



Diversified accessories allow users to have more choices, ensuring that the image quality and detection efficiency are improved while users have access to the cost-effective products.



## Customized Platform

can meet users' various measurement needs




## Software tailored to the user

Motic can develop AI software for users according to their needs to realize the integration of measurement, data collection, data upload, and data display



## System Diagram

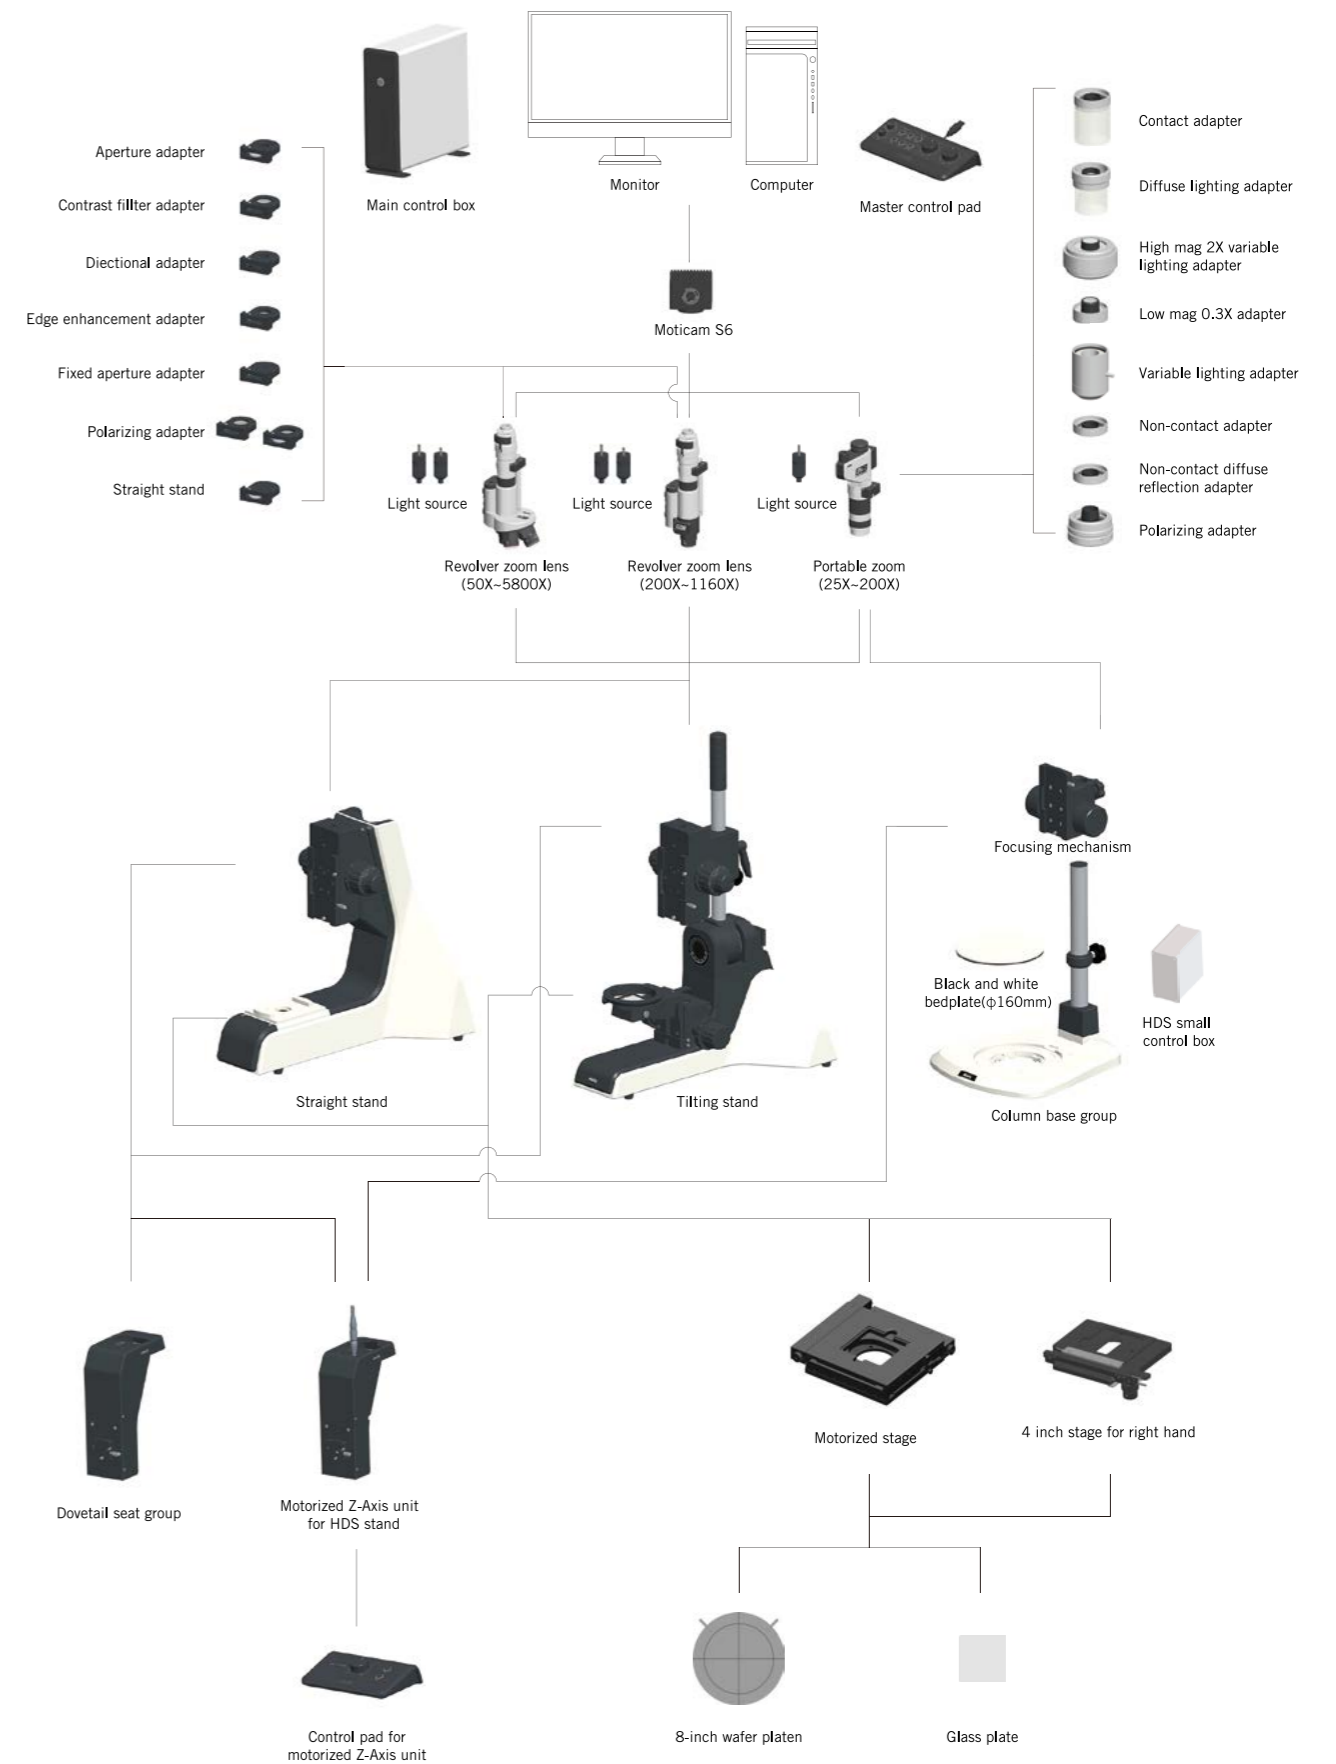



## Technical Specifications

Technical Specifications		
<b>Easyzoom2/ Easyzoom2PS</b>	Total magnification	25x~200x
	FOV	19.80mm~2.48mm
	Working distance	36mm
	AMS function	Active
<b>Easyzoom5</b>	Total magnification	50x~5800x
	FOV	9.9mm~0.09mm
	Working distance	10mm(100x objective 3mm)
	AMS function	Active
<b>Easyzoom5S</b>	Total magnification	200x~1160x
	FOV	2.48mm~0.43mm
	Working distance	10mm
	AMS function	Active
<b>Computer</b>	Intel i7 Processor	
	Solid State Drive SSD 256G	
	Mechanical Hard Disk 1T	
	27-inch 4K HD Screen	
<b>High Precision Frames</b>	Upper-Z axis travel distance (manual)	50mm
	Top-Z Resolution	1 μm
	Lower-Z-axis travel distance (manual)	50mm
	Ambient temperature	10°C to 40°C (no condensation)
	Relative humidity	Below 85% (no condensation)
	Dimensions (mm)/ Weight	273(W) x 467.1(H) x 444(D) / 8kg
<b>Swing frame</b>	Upper-Z axis travel distance (manual)	50mm
	Top-Z Resolution	1 μm
	Lower-Z-axis travel distance (manual)	50mm
	Swing angle	-60°~+90°
	ambient temperature	10°C to 40°C (no condensation)
	Relative humidity	Below 85% (no condensation)
<b>Motorized Z-axis</b>	Distance	30mm
	Resolution	0.1 μm
	Repeatability	1 μm
	Dimensions (mm)/ Weight	Module: 60(W) x 158(H) x 42(D) / 1.6kg
<b>Electric control platform</b>	2D image stitching	
	3D image stitching	
	Distance	100(X) x 100(Y)mm
	Drive mode	Electric
	Size	8 inches
	3D display function	
<b>Manual control of the platform</b>	3D contour correction function	
	Drive mode	Manual
	Size	4 inches
<b>Lighting source</b>	Distance	104(X) x 102(Y)mm
	LED	5V1A bright LED
	LED life	40000 hours
	Color temperature	5650K


## Technical Specifications

Technical Specifications	
<b>Observation function</b>	Lighting switch function
	Bottom lighting
<b>Display function</b>	Full screen function
	Screen split function
	Annotation display function
<b>Picture quality improvement function</b>	HDR function
<b>Image stitching function</b>	Fine shooting function
	2D image stitching
<b>3D stitching function</b>	3D image stitching
	Fast compositing and 3D function
<b>3D stitching function</b>	High-quality deep compositing
	3D display function
	3D shape correction function
	Report output (EXCEL)
<b>Storage function</b>	2D image saving
	3D image saving
	Video recording playback function
	Width, height difference, angle, etc.
<b>Measurement function</b>	Plane height measurement
	3D comparative measurements
	Spherical angle measurement
	Ruler display
	Lens magnification automatic recognition function
	Horizontal calibration function
	Noise removal function
	Automatic counting function
	Automatic height measurement
	CSV save
<b>3D measurement function</b>	3D profile measurement
	Point height measurement
	Line and surface roughness measurement
<b>Manual X,Y Measurement System</b>	Dynamic EDF
<b>Practical features</b>	Simple mode
	Each user set value storage
	Internet connection function
<b>PC software</b>	Feature Guide
	Communication software




## Dimensions (mm)


EasyZoom5

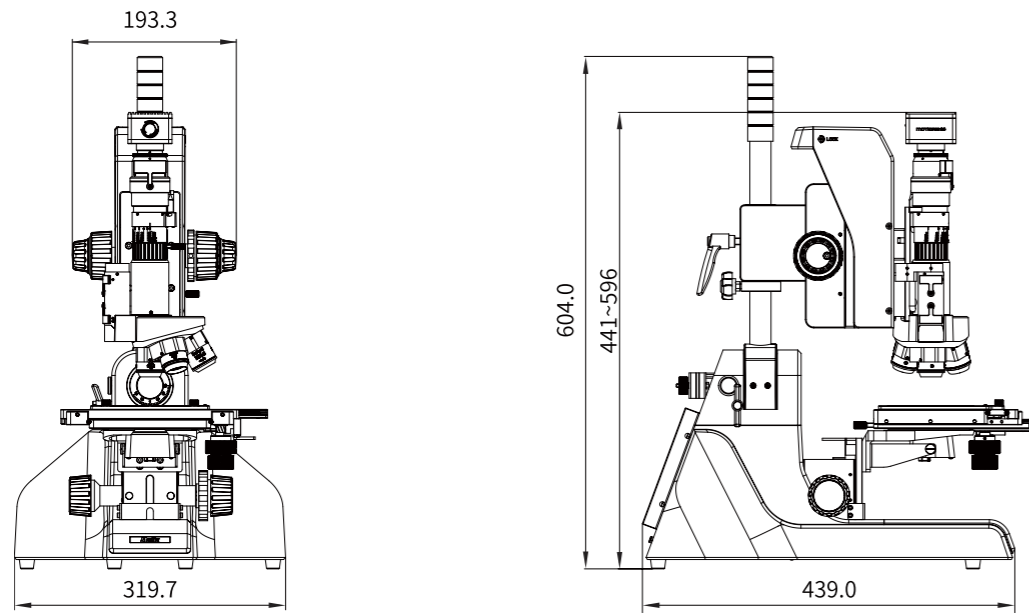


EasyZoom2

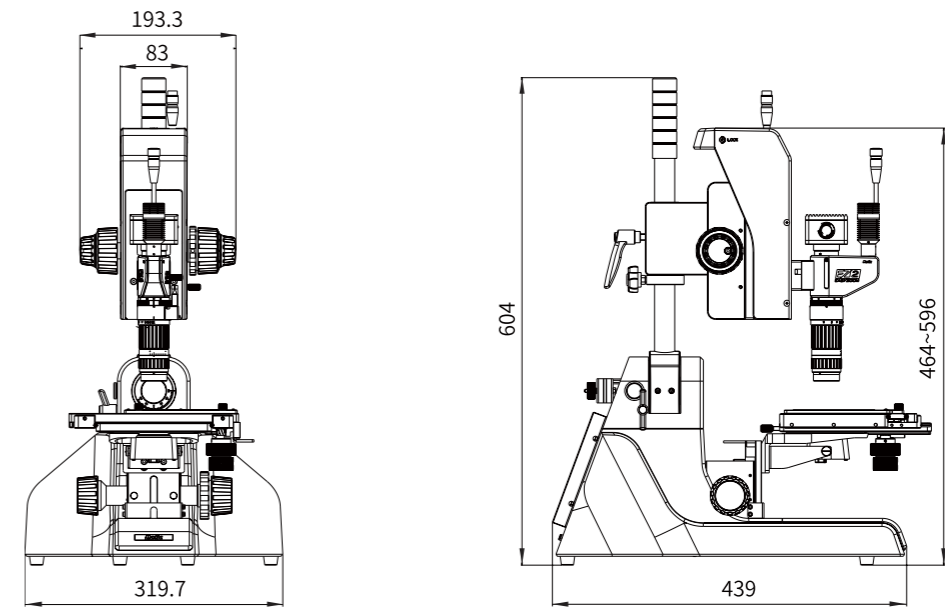

EasyZoom5S

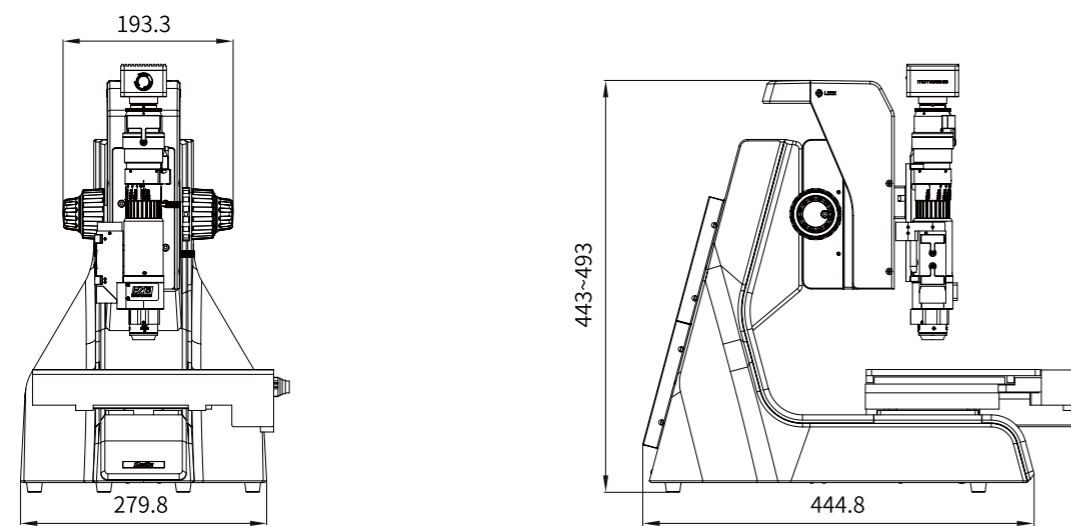

EasyZoom2PS

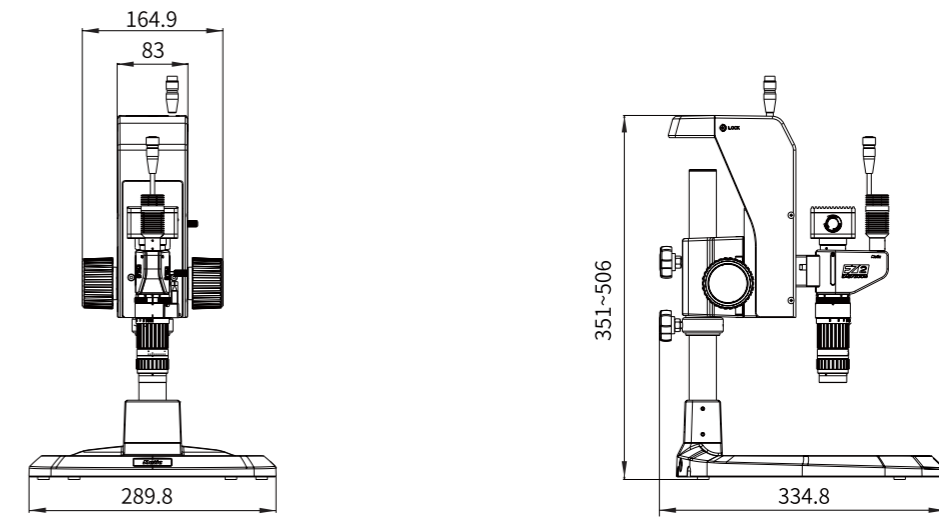





Canada | China | Germany | Spain | USA



[www.motic.com](http://www.motic.com)

EN | ES | FR | DE | IT | PT

**Motic Scientific (Xiamen)**

Motic Building Torch Hi Tech Industrial Development Zone, Xiamen P.R.C.  
Tel: +86 0592 5698 916 | E-mail: Sales.BioMed@motic.com

**Motic Instruments (Canada)**

130 - 4611 Viking Way, Richmond, BC V6V 2K9 Canada  
Tel: 1-877-977 4717 | Fax: 1-604-303 9043

**Motic Deutschland GmbH (Germany)**

Christian-Kremp-Strasse 11, D-35578 Wetzlar, Germany  
Tel: 49-6441-210 010 Fax: 49-6441-210 0122

**Motic Hong Kong Limited (Hong Kong)**

Unit 1712, 17th Floor, Exchange Tower, 33 Wang Chiu Road, Kowloon Bay,  
Kowloon, Hong Kong  
Tel: 852-2837 0888 | Fax: 852-2882 2792

**Motic Europe (Spain)**

C. Les Corts 12, Pol. Ind. Les Corts, 08349 Cabrera de Mar, Barcelona, Spain  
Tel: 34-93-756 6286 | Fax: 34-93-756 6287

\*CCIS® is a trademark of Motic Incorporation Ltd.

Motic Incorporation Limited Copyright © 2002-2023. All Rights Reserved.

Design Change: The manufacturer reserves the right to make changes in instrument design in accordance with scientific and mechanical progress, without notice and without obligation.

Designed at Motic Scientific in Xiamen  
Updated: 2023.07.21



Official Distributor: