

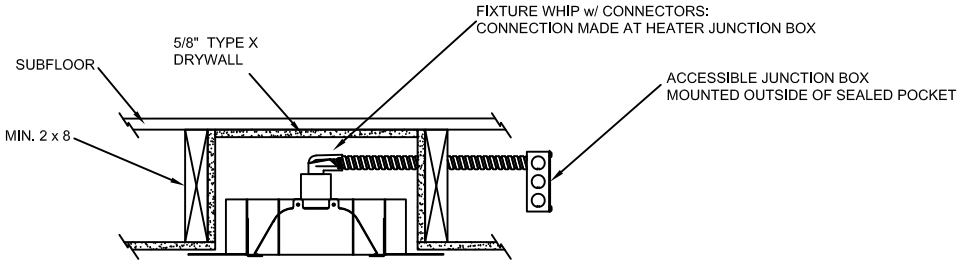
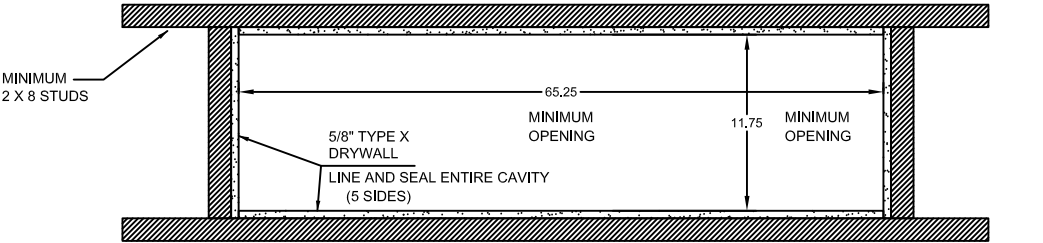
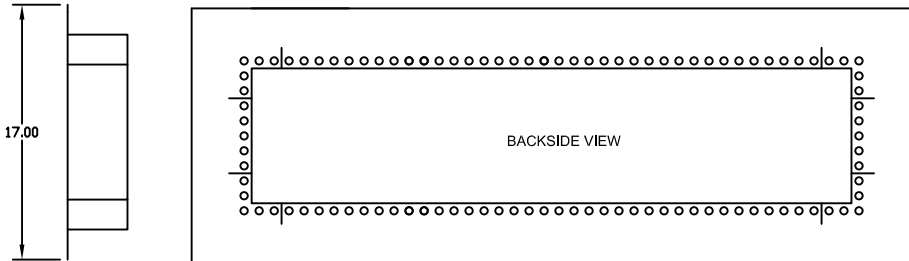
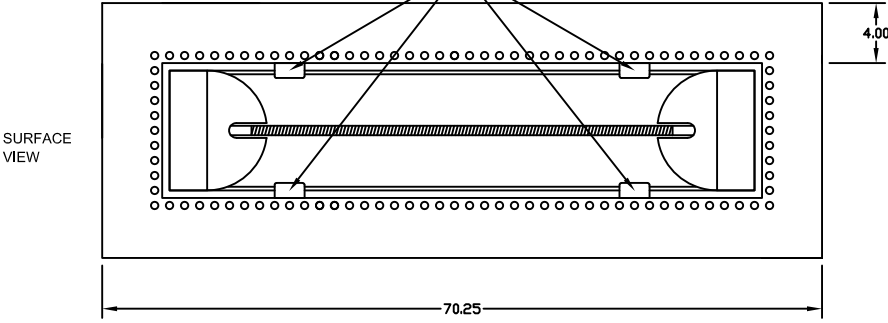
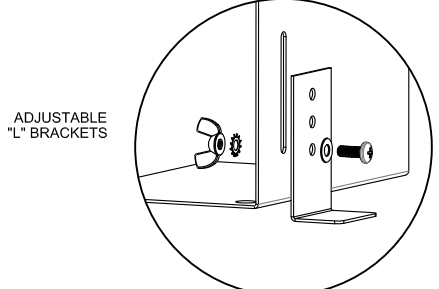


INSTALLATION TYPES



NOTE: HEATER BODY MUST BE FLUSH WITH OR LOWER THAN THE FINISHED CEILING.

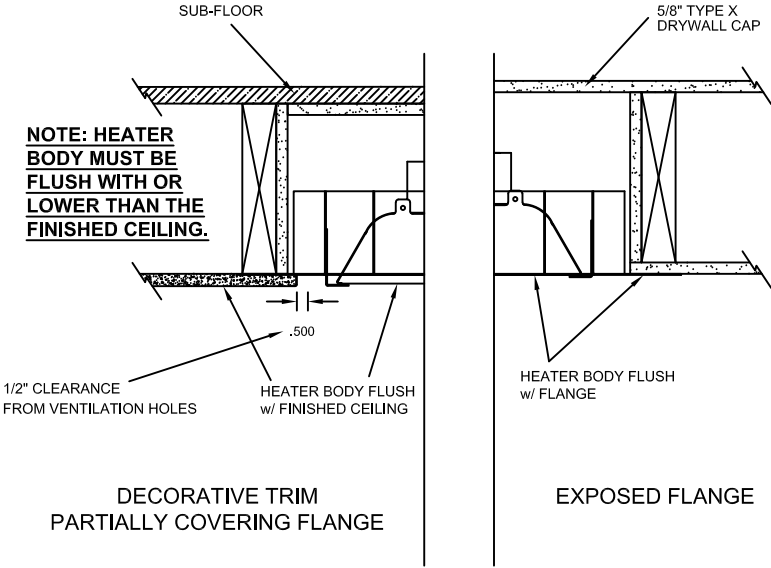

WARNINGS:

- Do not use Surface Mount Brackets.
- This Frame is ONLY to be used on a flat non-sloped ceiling.
- Heater Body must face straight down and be flush with the finished ceiling.
- Frame and Heater cannot be installed on a pitched angle.
- Accessible Junction Box must be installed outside of sealed drywall pocket.
- Must use 5/8" type "X" drywall.
- Must use supplied 4 foot Hi-Temp Fixture Whip and Hi-Temp Ceramic Wire Nuts.
- Please contact factory for longer length Hi-Temp Fixture Whips available for purchase.
- Discard Surface Mounting Brackets provided with Heater and use "L" Brackets.
- Use Licensed Electrician ONLY.

NOTES:

- Heater suspends (Gravity) by resting on adjustable "L" Brackets in flush mount fixture.
- Mounting holes on Surface Flange to be determined and drilled by Contractor/Installer.
- Coil excess flex into heater cavity.

INFRA TECH™ www.infratech-usa.com		15700 S. Figueroa St. Gardena, California 90248 Phone: (310) 354-1250 Fax: (310) 523-3674
ITEM #: 18-2305	MATERIAL: 304 S.S. #4 FINISH	
DESCRIPTION: W-61 FLUSH MOUNT FRAME (FOR USE WITH 6 1/4" HEATERS)		
NOTES: SUPPLIED w/ HI-TEMP FIXTURE WHIP		
DATE: Dec. 16, 2019	SCALE: N/A	DRAWN BY: CL