

## MG300 - SERIES




### MAGNETIC INCREMENTAL ENCODER Ø 58 MM

*Encoder with special flange and 3 mounting holes M4*

- Ø 58 mm
- 6 or 10 mm solid shaft with face
- Enlarged sturdy bearings, mechanically locked
- Short circuit and reversed polarity proof
- Dust and splash proof up to IP67
- Standard: 7-35 Vdc power supply, 300kHz  
2 square wave signals
- Options: Marker pulse, with/without inverted signals  
5 Vdc power supply, 300 kHz  
Customization upon request



*Flexible and durable  
encoder for demanding  
applications*

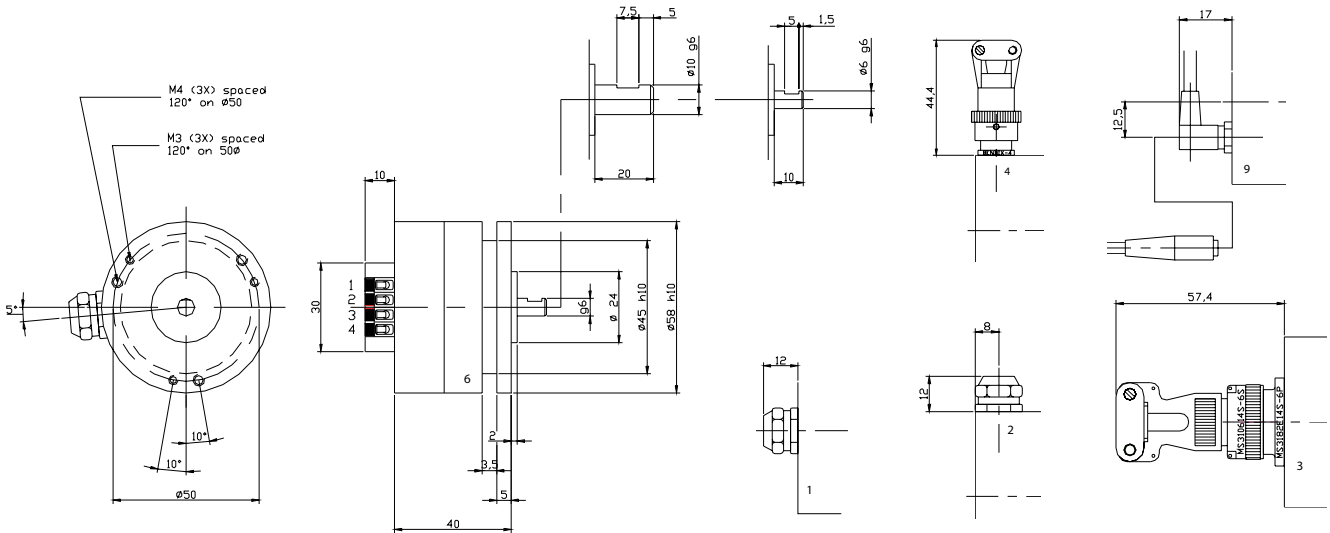


## ELECTRICAL SPECIFICATION, STANDARD

Power supply	7–35 Vdc
Current consumption	Max 40 mA without load
Output circuit	HTL
Low level output volt	Max <0,5 V at 20 mA load and 20°C
High level output volt	Min >Vcc-2V at 20mA load and 20°C
Short circuit protected	Yes
Polarity protected	Yes
Transient protected	Yes
Max load	70 mA

## OUTPUT SIGNALS, STANDARD

CCW rotation viewed from shaft end



## SIGNAL ACCURACY

Channel separation	90 el°
Max frequency	300 kHz
Operating temperature	-40° to +80°C

## MECHANICAL SPECIFICATION

Housing	Aluminum, electrically conductive for increased interference protection
Sealing	IP67 dust and waterproof (IP66 at shaft outlet)
Bearings	Permanently greased
Bearing load at 1 000 rpm:	
Radial	180 N Gives 50 000 hrs
Axial	130 N bearing life
Max rpm	3 000 (6 000)
Vibration	20g 20-2000 Hz
Chock	200g at 11 ms
Weight	approx: 300 g (without cable)

## CONNECTIONS

1. Axial cable, 1 m 6x0,22
2. Radial cable, 1 m 6x0,22
3. Axial 6-pin male MS connector
4. Radial 4-pin male KPT connector
6. Axial 4-screw terminal
9. Axial 4-pin M8 male connector
44. Axial/Radial 4-pin M8 male connector

## FUNCTION

	Cable 1-2	3	4	6	Cable M8
<b>1</b>	Green	A	A	3	Blue
<b>2</b>	Yellow	D	B	4	Black
<b>1 inverted</b>	White	B	-	-	-
<b>2 inverted</b>	Black	C	-	-	-
<b>+V</b>	Red	E	C	1	Brown
<b>0 V</b>	Blue	F	D	2	White

## MATING CONNECTORS & CABLES

For connection 3, MS3106E-14S-6S

For connection 4, KPT06E8-4S

For connection 9 & 44

- M8SR2, Snap Straight 2m 4x0,25 PUR/PUR
- M8SR5, Snap Straight 5m 4x0,25 PUR/PUR
- M8SV2, Snap Angled 2m 4x0,25 PUR/PUR
- M8SV5, Snap Angled 5m 4x0,25 PUR/PUR

## ORDERING CODE

Model	MG300	6	1000	1	X
Shaft 6 or 10 mm	_____				
Pulserate 1 - 1024	_____				
Connection	_____				
X= meter cable	_____				

