

WTC SERIES | TIME CLOCK ACID NEUTRALIZERS




BENEFITS

- *Increases pH level of water to a safe limit*
- *Protects copper plumbing systems and helps eliminate pinhole leaks*
- *Eliminates blue or green stains on fixtures*
- *Prevents scratching and pitting of porcelain and cookware*



WTC SERIES | TIME CLOCK ACID NEUTRALIZERS

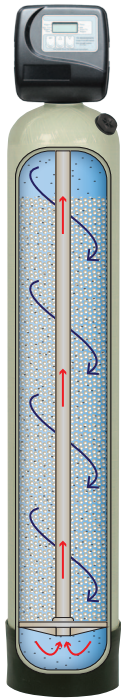

FEATURES

- Fiberglass tank will not rust, durable design and efficient operation
- Electronic Clack time clock control valve
- Bypass adaptable to ¾" or 1"
- Dome hole fill port
- Warranty

Fiberglass Tank: 10 years

Control Valve: 3 years

Timer/Motor: 3 years

PH LEVELS	
7.0	Neutral
6.8 - 6.9	Slightly Acidic
6.0 - 6.7	Moderately Acidic
4.0 - 5.9	Extremely Acidic
Recommended range: 7.0 - 8.5	
Low pH causes blue or green stains and corrosion of plumbing fixtures. It can also cause pitting of porcelain and enamel fixtures and dishes.	

Add filter media about every 3 to 6 months

MEDIA OPTIONS (Sold separately)


Extra Fine Calcite



80% Calcite
20% Mag Oxide



Fine Calcite



70% Calcite
30% Mag Oxide



Medium Calcite



60% Calcite
40% Mag Oxide



Processed Magnesium Oxide



100% Natural Magnesium Oxide



WTC15ANX-V
WTC25ANX-V

VORTECH PLATE




Environmentally friendly, reduces backwash requirement by up to 30%.

Designed for over 6,500 lbs. load capacity.

High flow design maximizes today's high efficiency control valve technology.

CLACK WS1-TC VALVE



Low pressure loss!

1-99 day time clock valve with LCD display.

8-hour battery backup, keeps time if power goes out.

Regenerates at pre-set intervals.

SPECIFICATIONS

Model	Capacity Cu. Ft.	Tank Size Inches	Service/Peak Flow Rate	Backwash Flow Rate	Gal. Per Backwash	Pipe Size In/Out	pH Range	50 lb bags of Media needed
WTC15ANX-V	1.5	10" x 54"	5/6 gpm	5.3 gpm	85	¾" or 1"	5 - 6.9	3
WTC25ANX-V	2.5	13" x 54"	7/9 gpm	7.5 gpm	120	¾" or 1"	5 - 6.9	5