

## Model

# DOUBLE POLE MOUNT DPM-100

Thank you for purchasing the PDR product

To ensure the correct usage, please read and follow the instructions manual thoroughly. Please store the instructions in a safe place for future reference.

All PDR mounts and adapters carry a limited lifetime warranty from ship date against defects in material and workmanship. Check the PDR website for details @ [www.PDRmounts.com](http://www.PDRmounts.com). We are not liable for improper installation that results in damage to mounts, adapters or presentation equipment.

**Special techniques are necessary for installation of the panel display mount.**

- Do not attempt to perform this work by yourself.
- Request an installation specialist to install this unit.
- Manufacturer assumes absolutely no responsibility for injuries and damages that may occur due to improper installation and handling.

To ensure customer safety, be sure to decide the installation location so that the strength is sufficient to withstand the weight of both the panel displays and the mount.


Always use at least two persons for all installations.

Fully tighten all of the mounting screws as specified in the installation instructions.

## MODEL DPM-100

## Features

- Suitable for Vesa 100mm and 75mm or any PDR mount
- Mounts to standard 1 1/2" pipe (not supplied)
- Display Mount hardware included
- Swivels 360 degrees
- Tilts down 30 degrees
- Supports two displays back to back
- 500 lb load capacity
- Heavy metal construction
- Made in the USA

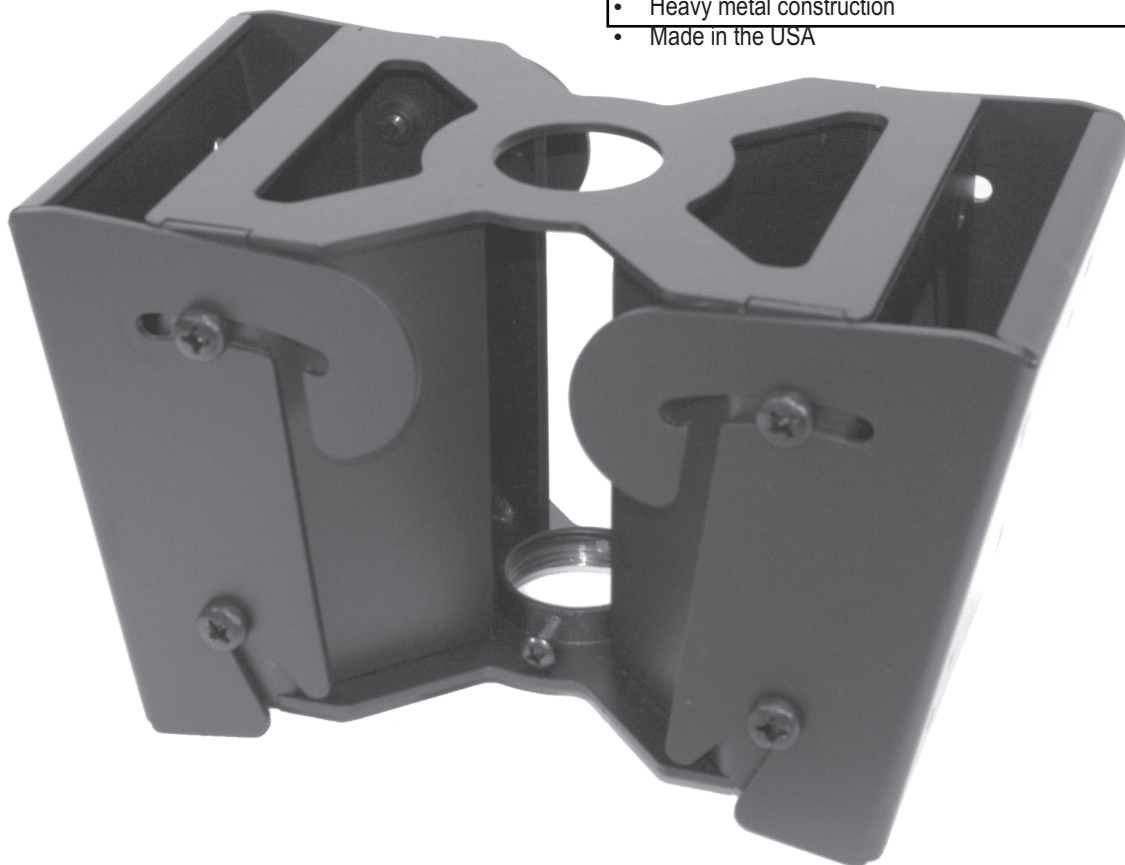

## INSTALLATION LOCATION



## WARNING



The ceiling where the mount is to be installed must be capable of long-term support of the total load of the panel displays and DPM-100 mount. Measures should also be taken to ensure sufficient strength to withstand the force of earthquakes, vibration and other external forces.

**Note:** Incorrect installation can cause the displays to fall and cause injury.

Total load of the panel (panel displays + pole mount)  
**MAXIMUM WEIGHT - 500 Lbs. ( 226 Kg.)**



## CAUTION

- Do not install close to an air conditioner intake or outlet. Do not install in locations where there are excessive amounts of dust oily smoke or tobacco smoke. Fire could result.
- Do not block the ventilation holes. Leave sufficient clearance in regard to the surroundings to avoid blocking the ventilation.
- Do not install in locations where there is excessive vibration or impact. Injury and damage could result from the panel displays falling.




## WARNING

- Use the specified bolts and screws in the specified places and tighten firmly. Failure to do this could cause injury if the panel displays fall.
- Do not alter any of the parts. Do not use broken parts.
- Always use at least two people to perform the installation work. Injury could result from dropping heavy objects.

**Caution:** Installation of units to be carried out by qualified technicians only. Install in an appropriate location by checking the ceiling structure and durability for safety and accident prevention

# MODEL DPM-100 SPECIFICATIONS

Fig1

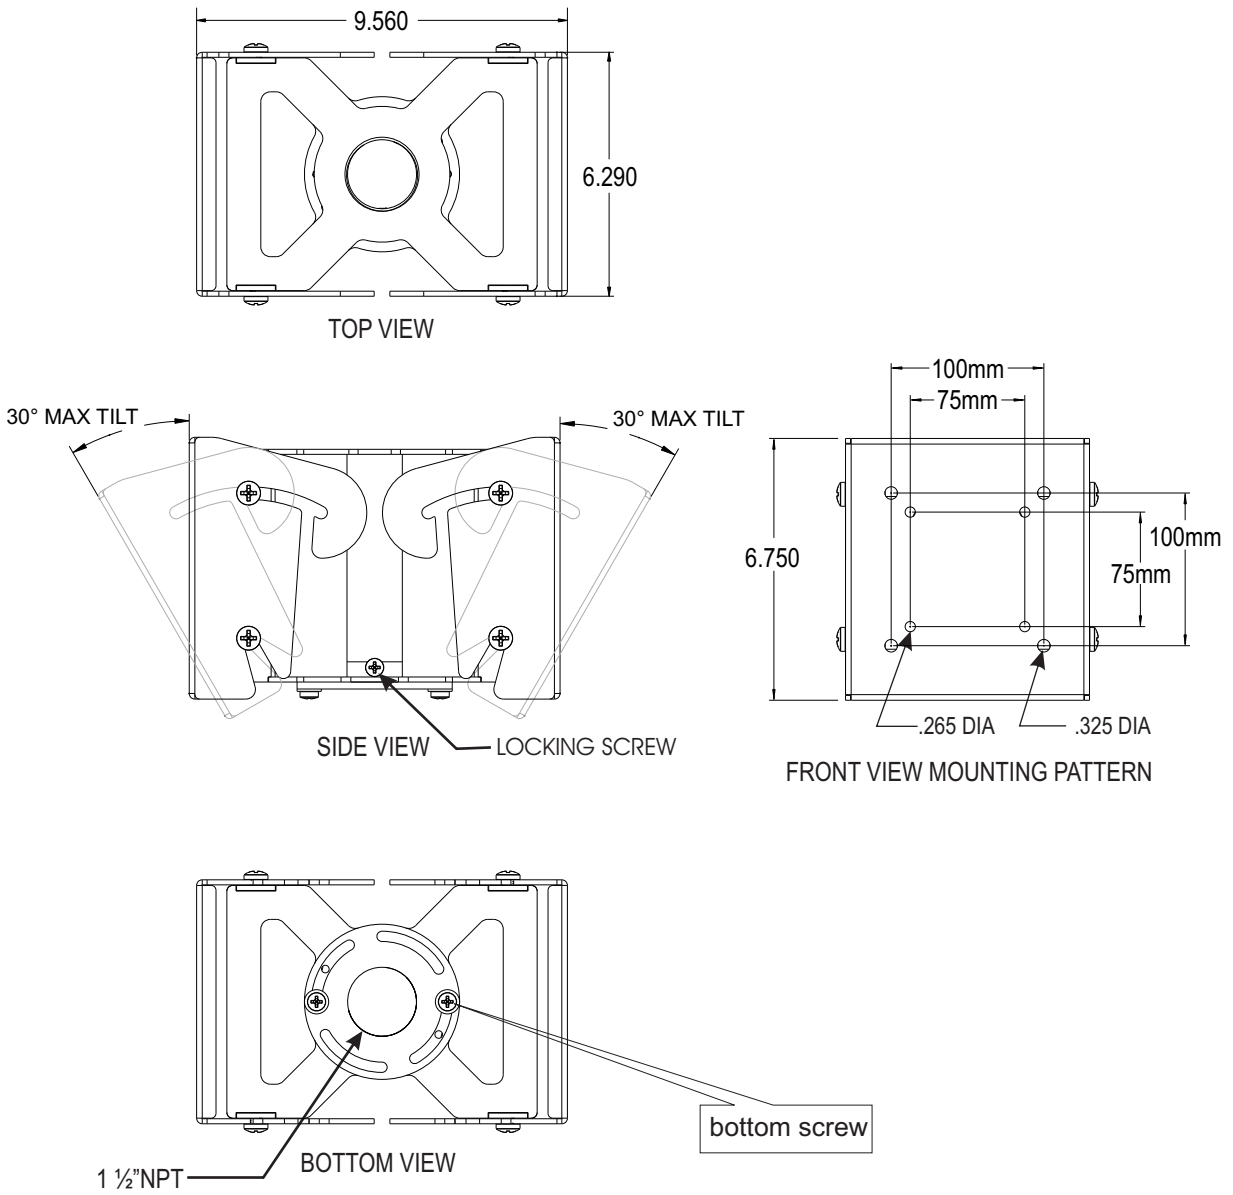

## INSTALLATION GUIDE

- 1: Install the DPM 100 onto the end of a threaded 1 ½" NPT (sold separately). See fig 2
- 2: Using the side locking screw, secure the pipe to the mount. See fig 3
- 3: To rotate the DPM100, loosen the bottom screws. See fig 1  
Rotate to the desired viewing position and tighten the screws.
- 4: A repositioning of the bottom screws may be necessary to rotate to the best viewing angle
- 5: Using the 4 holes on the face of the mount, attach a PDR mount of your choice (sold separately)
- 6: Tilt the mount to the desired position and secure the side screws.

