



QUICK CODE ACCESS



Heavy duty locks with on the door code change capabilities. Simple and quick control of coded access.

Traditionally, changing the code on a mechanical lock requires the lock to be removed from the door; the CL600 however, features QuickCode functionality allowing on the door code changes in seconds. The CL600 QuickCode brings significant advantages to commercial users such as hospitals, schools and local authorities. The locks allow for various ways of managing entry by code, key or passage function entry via full size lever handles.



Easy to
install



On the door
code changes



Limited lifetime
warranty*

8,191

Total code
combinations

FEATURES

- Full size lever handles with return to door
- Suitable for wooden doors between 1³/₈" - 2³/₈" thick
- Passage function option
- Suitable for interior and exterior use
- Tubular latch and mortise lock models available
- Large three coil lever return spring suitable for high traffic use
- Available in brushed steel, polished brass and flat black finishes
- Tested to Grade 2 ANSI A156.2
- UL/ULC Fire Rating 3 hours



LOCK MODELS



CL600PK

Panic Access Kit

Front plate only. Install with new or existing panic equipment. The follower on the panic equipment must return to square to align with follower on the lock.



CL610 / CL615

Tubular Latch

Medium duty deadlocking latch. Latch retracts by turning inside handle freely, or the outside handle after code input.



CL610 / CL615 BB

Back to Back Option (BB)

Medium duty tubular latch. Two coded plates for installation on both sides of the door. Provides coded access in both directions.

Other Models Available:

CL650 Mortise Lock


Grade 1 ANSI American Mortise Latchbolt.

IC Cylinder


Prepped to receive a Small Format Interchangeable Core. Please note we do not supply core or keys.



Two Tubular Latch Sizes Available:



Requires 1" x 3 1/8" (25mm x 82mm) hole



Requires 1" x 3 5/8" (25mm x 92mm) hole

ADDITIONAL FEATURES

Passage Function

The CL615 model provides a passage function. The outside lever will retract the latch freely until disabled.

Code Change Method

QuickCode allows on the door code changes in seconds!


Panic Kit Option

An extra long spindle is provided to work with most single point panic pads or bars.

PRODUCT DIMENSIONS

CL610 CL615

CL650

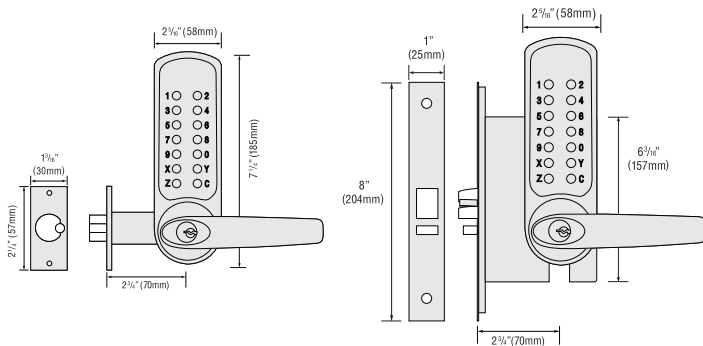

TECHNICAL SPECIFICATIONS

FEATURE	DESCRIPTION
Spindle Type	Two part 5/16" (8mm) spring loaded spindle
Tubular Latch	Medium duty deadlocking latch
Mortise Lock	Grade 1 ANSI American Mortise Latchbolt
Material	Zinc Alloy
Finish Color	Brushed Steel, Polished Brass and Flat Black
Non Handed	Locks will fit doors hung on the left or right
Door Thickness	1 3/8" - 2 3/8" (35mm - 60mm)
Key Bypass	As standard
Keyed Alike	Locks can be supplied keyed alike on request
Key Cylinder Change	As standard
Code Storage	Single Code
Install Options	Vertical only
Suitable For	Interior and exterior use
Standards	Tested to Grade 2 ANSI A156.2 UL/ULC Fire Rating 3 hours



Scan to shop!

www.codelocks.com

