ACNC/TotalPlex®

DoorBell Fon™

DP68
IDoorBell Fon

DESCRIPTION

With over 20 years of experience, the makers of the **DoorBell Fon** system bring you the **IDoorBell Fon**. This exciting new product offers a new level of security and convenience at professional quality and reliability. From your **smartphone or tablet**, you can now answer your door and even **unlock** it. With the built-in camera, monitor your entryway, day or night. You're always home, even when you're not!

DP68S – Silver
DP68BK – Black
DP68BZ – Bronze

FEATURES

- Manufactured in aluminum with anodized Brass, Black, Bronze, and Aluminum finishes
- Live Video and Full Duplex Audio
- WiFi or LAN-based Network connections
- **Lock Trigger** provides 12V to an electric strike or maglock and the Exit input can attach to card readers and keypads
- App based communication and video monitoring, powered by YooSee

SPECIFICATIONS

Chipset
- Hi 3518E

Wireless Indoor Bell
- 433MHz
- Learning Code
- Max distance: 100 feet

Storage
- Up to **64GB** SD Card

Video
- Resolution: 720p
- Frame Rate: 1-25fps
- Image Sensor: ¼ CMOS
- Visual Angle: 145° Super-wide angle
- Night Vision: 6pc LED Lights, IR 3m, IR-Cut, No color change

Audio
- Full-duplex
- G.711A

Alarm Motion Detection
- PIR (Human body infrared sensor detection)

Network
- Protocols: TCP/IP, UDP, SMTP, DHCP, UPnP, P2P, ONVIF
- WiFi 802.11 b/g/n (range: 45 feet or WiFi extender for more)
- 10Mbps/100Mbps **Ethernet**
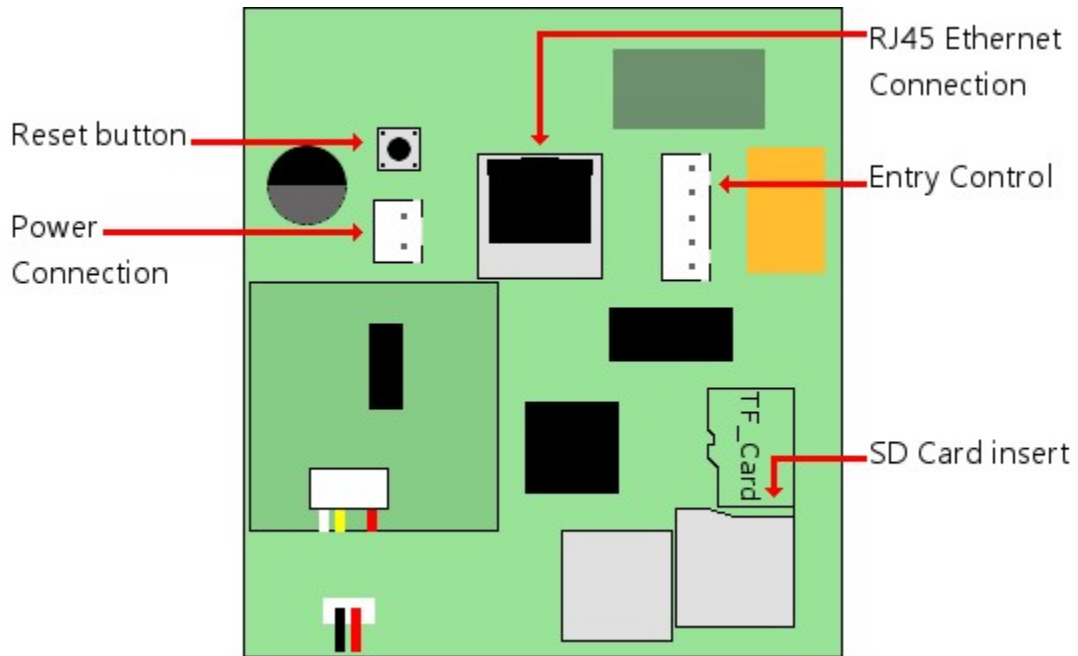
Certification
- ISO, CE, FCC, RoHS

Lock Control
- Wet Contact: 12V, 1.2A
- 1 Exit/Egress input

Requirements
- **Yoosee** app – available free on Google Play or App Store
- IOS 7.0 or greater, Android 3.0 or greater
- Power supply: DC 12V 1.5A
- Operational Temperature: -4°F to 131°F
- Operational Humidity: 10-95%RH

CIRCUIT BOARD LAYOUT

Reset button

Power Connection

RJ45 Ethernet Connection

Entry Control

TF_Card

SD Card insert

MOUNTING

2 3/8"

3 3/8"

2 1/8"