

FAS-J-SLIDECH300BBUP

Sliding gate operator, Max. gate weight 300kg, chain driven





1. specialty:

- a、 The limit use of electronic Limit, easy to set limit position and limit location can be accurate to mm.
- b、 To ensure the safety of users, the operator have use of the softstart and slow-stop technology, the obstruction force of reverse function is adjustable and with automatic closing functions.
- c、 Particularly simple installation, just two power line can solve all problems.
- d、 A comprehensive interface: Infrared, solar energy, external buttons, etc.
- e、 The aluminum oxide technology in the sliding gate operator, will give you the beauty visual feeling.
- f、 Provides whole set chain wheel accessory, lets you install is simpler.

Outview look

Two transmitters

Battery back up

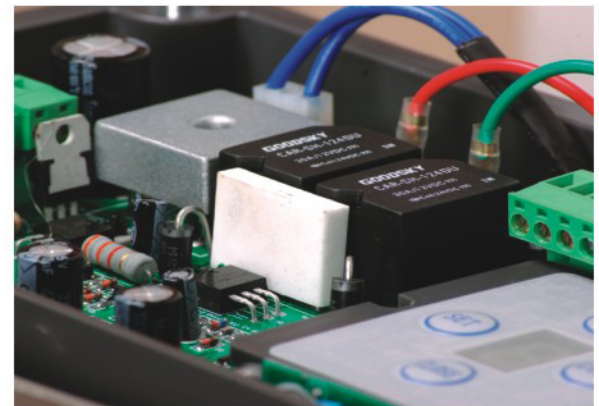

2. Main technical parameters

Unit Model	FAS-J-SLIDECH300BBUP
Power Supply	110VAC
Maximum gate weight	300kg
Maximum gate width	8m
Motor	24VDC 100W
Output torque	Max. 8N · m
Work duty	S ₂ 30min
Limit switch	electronical Limit
Gate Move speed	13m/min
Remote control range	≥ 30 meters
extra remote control	20
Frequency	433.92 MHz
Noise	≤ 58 dB
Working temperature	-20°C ~ +70°C
Battery back up	24V 4.5Ah

