


FAS-SLIDECH300BBUP

Sliding gate operator, Max. gate weight 300kg, chain driven



FAS-SLIDECH300BBUP Outline View

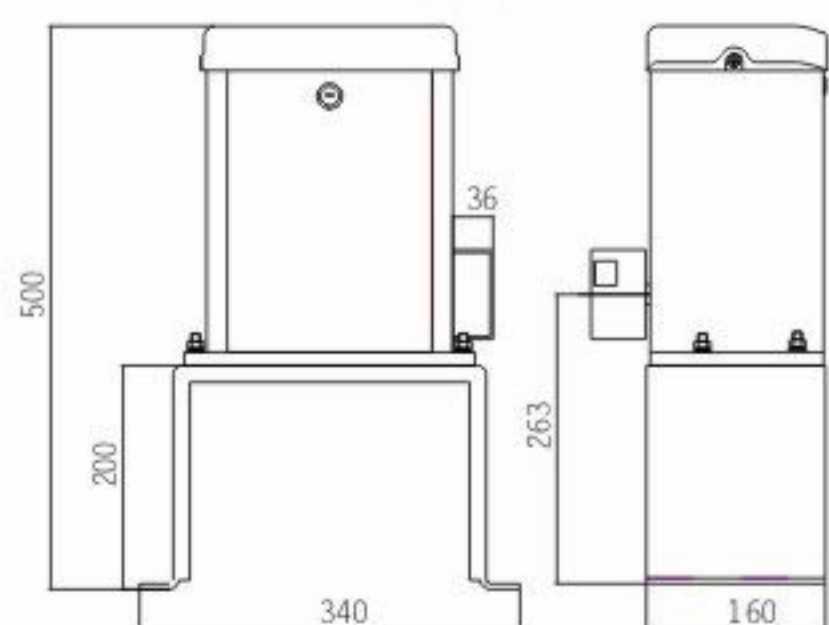

1. specialty:

- a、 The limit use of electronic Limit, easy to set limit position and limit location can be accurate to mm.
- b、 To ensure the safety of users, the operator have use of the softstart and slow-stop technology, the obstruction force of reverse function is adjustable and with automatic closing functions.
- c、 Particularly simple installation, just two power line can solve all problems.
- d、 A comprehensive interface: Infrared, solar energy, external buttons, etc.
- e、 The aluminum oxide technology in the sliding gate operator, will give you the beauty visual feeling.
- f、 Provides whole set chain wheel accessory, lets you install is simpler.



2. Main technical parameters

| | |
|----------------------|-------------------------|
| Unit Model | FAS-SLIDECH300BBUP |
| Power Supply | 110VAC |
| Maximum gate weight | 300kg |
| Maximum gate width | 8m |
| Motor | 24VDC 100W |
| Output torque | Max. 8N · m |
| Work duty | S ₂ 30min |
| Limit switch | Electronic limit switch |
| Gate Move speed | 13m/min |
| Remote control range | ≥ 30 meters |
| extra remote control | 20 |
| Frequency | 433.92 MHz |
| Noise | ≤ 58 dB |
| Working temperature | -20°C ~ +70°C |
| Extra Battery | 24V 1.3 Ah |

