




Single door slim monitored magnetic lock, compact design for indoor applications.

Monitoring provides LED lock status indication with time delay feature for lock to engage.

Maglock Features:


- MOV provides spike and surge protection
- Magnetic bond sensor & LED monitor door status
- Top-plate, armature-plate and fixings included
- Surface mount
- Silver anodised aluminum housing
- 0~60s adjustable time delay for door to lock

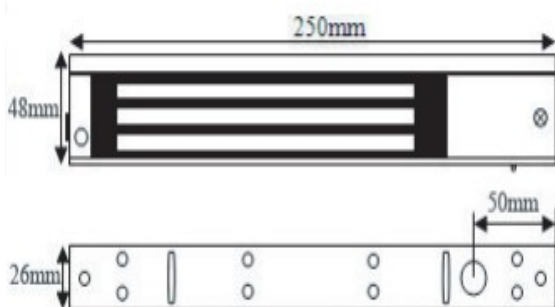

Electromagnetic lock

Technical Information:

- Holding force: up to 275kg (600 lbs)
- Dual voltage = 12Vdc 500mA / 24Vdc 250mA (selected)
- Voltage tolerance: +/- 15%
- Operating temp: -10°C to +55°C
- Magnet: 250(L) X 48(W) X 26mm(T)
- Armature zinc plated: 180(L) X 38(W) X 11mm(T)
- Weight: 3 kg / 6 lbs (approx)

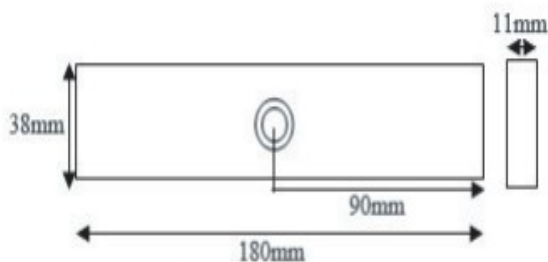

Related Products:



FAS-WLZB600



FAS-WABP600

Email : hello@fastaccesssecurity.com