

SD (LOGIC 5.0) SLIDE DOOR OPERATOR

SECTION 08 71 13



KEY FEATURES

STANDARD APPLICATION	Recommended for single and bi-parting sliding doors in standard duty-cycle commercial applications
RATED DUTY CYCLE	Standard-duty: Up to 25 cycles/hour and up to 90 cycles/day (using continuous-rated motor)
OPERATOR SPEED	11-12 Inches per second
LIMIT SETTINGS	Mechanical
EMERGENCY DISCONNECT FOR MANUAL OPERATION	Floor-level emergency release sash chain
EMERGENCY DISCONNECT WITH AUTO-RECONNECT	Reconnects when tension is removed from emergency release chain
PROGRAMMING	Control function selector dial/tactile buttons
CIRCUIT BOARD	Solid-state Logic 5.0 circuit board
TIMER-TO-CLOSE	Programmable in 1 second and 15 second increments up to 68 minutes, standard
CLUTCH	Standard adjustable friction clutch
MID-STOP	Programmable
RUN TIME PROTECTION	Maximum run timer
MOTOR REVERSE ACTION PROTECTION	Delay-on-reverse circuit
MOTOR OPERATOR WALL CONTROL	3-Button Control Station with Maintenance Alert System (MAS)
TROLLEY TRACK	Dual L-rail trolley track
PUSH BUTTON STATION	3-Push button Station (Open/Close/Stop)

SPECIFICATIONS

RADIO RECEIVER	Security+ 2.0® technology standard on-board with tri-band frequency; accepts up to (90) single-button or (30) 3-button remote controls plus up to (30) wireless keypads or an unlimited number of DIP switch remotes
VOLTAGE CONNECTIONS	Single-phase: 115V/230V dual voltage; 3-phase: 208V/230V/460V dual voltage; 3-phase: 575V single voltage
CONTROL CIRCUIT	5VDC NEC class 2
DRIVE REDUCTION	Belt/chain & pulley; first-stage heavy-duty 5L V-belt; second stage #41 chain; #41 output chain on trolley
BEARINGS/BUSHINGS	Industrial ball bearings on output shaft; heavy-duty oil-filled bushings on reduction shafts
BRAKE	Standard
CONSTRUCTION	NEMA 1 type electrical box; heavy-duty 11-gauge steel frame with durable powder coat finish; all reduction sprockets drilled and pinned to shafts
TROLLEY ROLLER CHAIN	#41 standard
WARRANTY	2 years

INSTALLATION FEATURES

MAXIMUM DOOR HEIGHT	22 feet standard with additional capability*
MAXIMUM DOOR WIDTH	24 feet standard with additional capability; double for bi-part*
MAXIMUM ALLOWABLE SQUARE FOOTAGE	480 square feet; double for bi-part
INTERNET CONNECTIVITY	myQ® Technology enables remote monitoring and control of the commercial door via a smartphone, tablet, or computer**

This commercial door operator must feature constant pressure to close or be equipped with an external monitored entrapment protection device. Use only LiftMaster monitored entrapment protection devices itemized on the accessory page of the operators installation manual to meet UL 325 requirements.

* Contact us at Specs@LiftMaster.com for additional capabilities.

**LiftMaster Internet Gateway and myQ app required.


DATA SHEET
SLIDE DOOR OPERATOR

LiftMaster®

SD (LOGIC 5.0) SLIDE DOOR OPERATOR

SECTION 08 71 13

DIMENSIONS

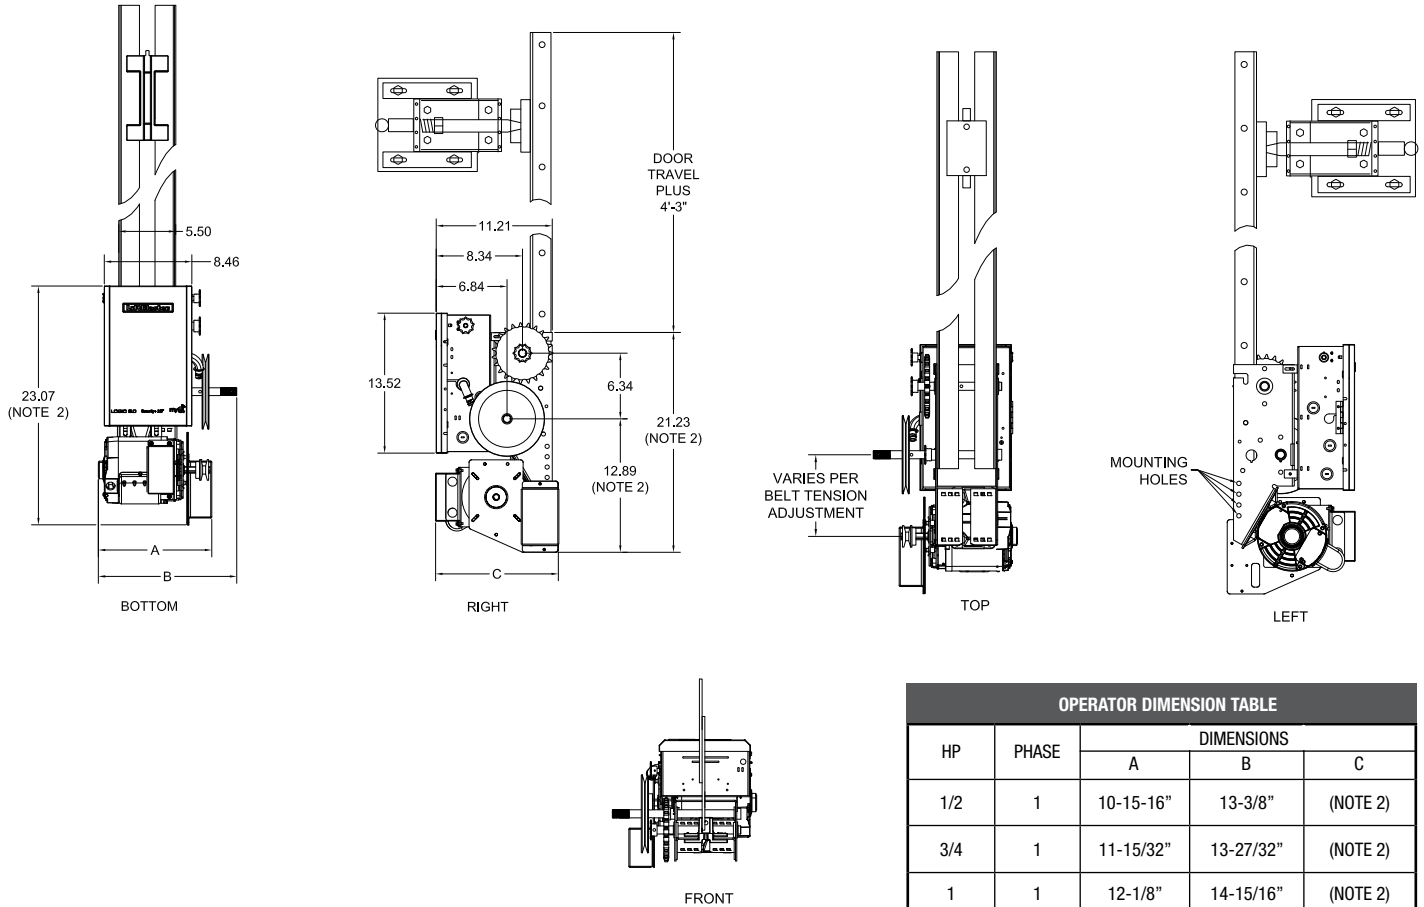

OPERATOR DIMENSION TABLE				
HP	PHASE	DIMENSIONS		
		A	B	C
1/2	1	10-15-16"	13-3/8"	(NOTE 2)
3/4	1	11-15/32"	13-27/32"	(NOTE 2)
1	1	12-1/8"	14-15/16"	(NOTE 2)
1/2	3	11-1/2"	13-15/16"	(NOTE 2)
3/4	3	11-1/2"	13-15/16"	(NOTE 2)
1	3	11-1/2"	13-15/16"	(NOTE 2)

Notes:

1. Dimensions A,B & C may vary per motor manufacturer specification revisions and special modifications to the operator.
2. Dimension will vary per belt tension adjustment approx. "C" dimension is 12/14"

CAPACITY

DOOR SIZE SELECTION GUIDE		
HP	Maximum Door Weight (lbs.)	Maximum Door Area (sq. ft.)
1/2	1300	260
3/4	1850	340
1	2400	480

On steel insulated doors, a 24-gauge back panel is assumed. If a heavier back panel is supplied, use the next higher HP rating. Recommended max duty cycles: 25 per hour, up to 90 per day.