



Structured Cable Products®


Quality Installations Deserve Quality Products

www.spcat5e.com
 sales@scpat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: 12/4OFC-HD-WT UPC: 817777014655

DESCRIPTION:

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 4C/12 AWG 65 STRAND OFC- EN50575:2014 Eca, SUN RES HD PVC JKT- WHITE- 500 FT/152M SPOOL

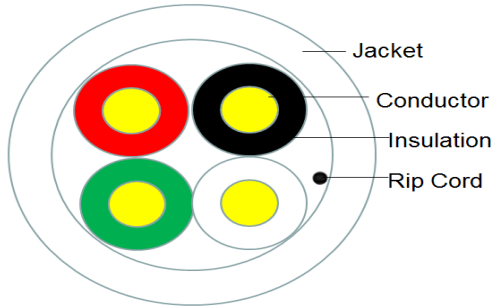

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
 EU RoHS 2011/65/EU Compliant
 EN50575: 2014 REACTION TO FIRE CLASS Dca

Application: Speaker Cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	12AWG X 4C(3.28mm ²)
	Construction	65/0.254mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	3.20mm +/-0.1mm
	Colors	Black & Red & Green & White
Jacket	Material	PVC
	Min.Thickness	0.80mm
	AVG.Thickness	0.95mm
	Diameter	9.8mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/150mm	

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C
Minimum installation temperature	0°C + 40°C
Conductor Resistance	Max 5.8 ohm/km at 20°C
Insulation Resistance	Min 50MΩ*km at 20°C
Dielectric Strength	Min AC1.5KV
Rated Voltage	300V
Test Voltage	800V/min



Structured Cable Products®

Quality Installations Deserve Quality Products

www.spcat5e.com
 sales@scpat5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: 12/4OFC-HD-WT	UPC: 817777014655
---------------------------------	-------------------

DESCRIPTION:

INDOOR/OUTDOOR PRO GRADE SPEAKER CABLE- 4C/12 AWG 65 STRAND OFC- EN50575:2014 Eca, SUN RES HD PVC JKT- WHITE- 500 FT/152M SPOOL

Impedance:			
opposite:		91 ± 5 Ω	
near by:		72 ± 6 Ω	
Capacitance:			
opposite:		22 ± 3pf/ft	
near by:		28 ± 3pf/ft	
Marking:			
STRUCTURED CABLE PRODUCTS --- 12/4OFC-HD --- E198137 SCP3 (UL) CL3 C(UL) CMR 4C 12AWG 65 STRAND OFC -- INDOOR/OUTDOOR-SUN RES -- EN50575:2014 CE Dca UV-PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M			
Packaging:			
Approx.Weight	Approx.Dimension(mm)	Package	Packages per pallet
30.04kgs/66.235lbs	360X220X160	500FT/Spool	36