




SCP PART#: 12/4OFC-WT UPC: 810070018702

DESCRIPTION:

4C/12 AWG 65 STRAND OXYGEN FREE COPPER, SPEAKER CABLE, EN50575:2014 Eca, UL CMR PVC JKT- WHITE - 500 FT/152M SPOOL

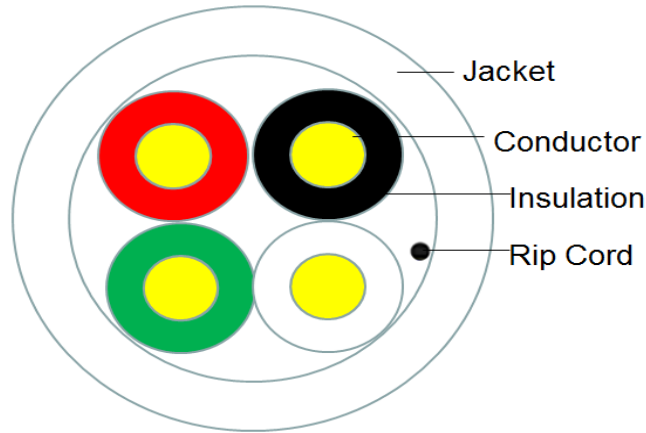

Regulatory

UL : UL 444 & UL 13, Type (UL) CMR/CL3 c(UL)
 EU RoHS 2011/65/EU Compliant
 EN50575: 2014 REACTION TO FIRE CLASS Dca

Application: Speaker Cable

Construction Characteristics:

Conductor	Material	Stranded Bare Copper
	Size	12AWG X 4C(3.28mm ²)
	Construction	65/0.254mm +/-0.004mm
Insulation	Material	PVC
	Min.Thickness	0.33mm
	AVG.Thickness	0.36mm
	Diameter	3.20mm +/-0.1mm
	Colors	Black & Red & White & Green
Jacket	Material	PVC
	Min.Thickness	0.60mm
	AVG.Thickness	0.80mm
	Diameter	9.9mm +/-0.20mm
	Rip Cord	Nylon
	Color	Per request
Bend radius	Min 15D/150mm	



Structured Cable Products®

Quality Installations Deserve Quality Products

www.scp5e.com
 sales@scp5e.com
 Direct: 954-327-5770
 Toll Free: 866-470-5742

SCP PART#: 12/4OFC-WT UPC: 810070018702

DESCRIPTION:

4C/12 AWG 65 STRAND OXYGEN FREE COPPER, SPEAKER CABLE, EN50575:2014 Eca, UL CMR PVC JKT- WHITE - 500 FT/152M SPOOL

Electrical & Physical Characteristics:

Operating Temperature Range	- 20°C + 75°C		
Minimum installation temperature	0°C + 40°C		
Conductor Resistance	Max 5.8 ohm/km at 20°C		
Insulation Resistance	Min 50MΩ*km at 20°C		
Dielectric Strength	Min AC1.5KV		
Rated Voltage	300V		
Test Voltage	800V/min		
Impedance:			
opposite:	91 ± 5 Ω		
near by:	72 ± 6 Ω		
Capacitance:			
opposite:	22 ± 3pf/ft		
near by:	28 ± 3pf/ft		
Marking:			
STRUCTURED CABLE PRODUCTS --- 12/4OFC --- E198137 SCP3 (UL) CL3 C(UL) CMR 4C 12AWG 65 STRAND OXYGEN FREE COPPER - EN50575:2014 CE Dca PVC JKT FT4 75C RoHS ZONE/DEVICE A B C D E 0 1 2 3 4 5 6 7 8 9 ***M			
Packaging:			
Approx. Wight(kg)	Approx. Dimension(mm)	Package	Packages per pallet
28.7kgs/63.272lbs	360X280X160	500ft/Spool	27/36