# PRODUCT ID: 6291

Outdoor Blank-out LED Direct-view Sign

#### MODEL

TCL77R-224H/120-277VAC



#### **DIMENSIONS**

7" H x 7" W x 2.5" D (est. 3.078 lbs)

## **CLASS**

**CLASS**: TCL Series

Control Method: Switch (not included) or external relay.

#### CONSTRUCTION

Cabinet: 1-piece, corrosion resistant, extruded aluminum frame, 2.5" deep. Face Material: Injection molded, impact resistant Lexan hood with Lexan lenses

Faces: Single Faced Sign Finish: Duranodic Bronze Mounting Channel: None

### **ELECTRICAL**

Flashing: Factory setting 55fpm. Input Voltage: 120-277 VAC UL/cUL Listed: Listed for wet locations

#### **MESSAGE**

Illumination: Super bright direct view LEDs. Message blanks out when off. Sign Messages: See message table below

MESSAGE	LED/COLOR	<b>HEIGHT</b>	AMPS
Red Indicator Dot (Flashing)	Red Wide Angle LED	4.0"	0.033-0.014
Red Indicator Dot	Red Wide Angle LED	4.0"	0.033-0.014

NOTE: Above messages are independently controlled.

#### Signal-Tech


4985 Pittsburgh Ave. Erie, PA 16509 Phone: (877) 547-9900

Fax: (814) 835-2300 Email: sales@signal-tech.com Website: www.signal-tech.com Signal-Tech

Proudly Made in the USA

# **Product View**

NOTE: Sign image may not exactly represent the finished product. For illustration purposes only.

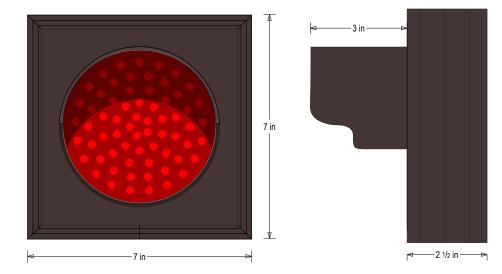

Frame Detail

