



Photocells



Sunset

- **Synchronized** IR photocell for surface mounting
- 15m/ 49 feet range
- Installation on wall or PILAR pillar
- Operation temperature -15°C to +60°C / 5° F to 141°F
- 12V-24V power supply
- IP 55 Protection class
- Size: h 85x57x32 mm / h 3.1x1.9x1.8 in

23102076



Pilar

- Aluminium pillar for photocells SUNSET h 40 cm - h 15.7" (1 pcs)

12710205

Pilar Prox

- Aluminium pillar for KEY PLUS key switch (h 1 m - h 3 feet)

12710210



Sunset Bat

- **Synchronized** modulated active IR photocell for surface mounting.
- 10m/ 32 feet range
- Transmitter power supply through solar panel or batteries
- Operation temperature -15°C to +60°C / 5° F to 141°F
- 12V-24V power supply
- IP 55 Protection class
- Size: h 85x57x32 mm / h 3.9x2.3x1.8 in

23102106



Wall- S

- **Synchronized** IR photocell for **screened** surface mounting
- EMI screen suitable to work in areas with high electromagnetic disturbances
- Methacrylate plastic cover
- 15m/ 49 feet range
- Operation temperature -15°C to +60°C / 5° F to 141°F
- 12V-24V power supply
- IP 45 Protection class
- Size: h 107x68x37 mm / h 3.9x2.3x1.8 in

23102185



Photocells



Eyes 2



- **Synchronized** photocell for outside mounting
- Adjustable antenna about 30° along the vertical axes and 210° along the horizontal axes
- Ideal for installations on gates or leaves with limited space for photocells
- 30 m / 98.4 feet range
- IP55 Protection class
- Relay output
- Perfect alignment thanks to the Leds
- **With anti-vandalism metal protection cover**
- **Anti-vandalism front fixing screw**
- Reduced size: h129x48x42mm / h 5.07x1.88x1.65 "
- 12V-24V power supply

23102165



Anti-vandalism front fixing screw




Eyes Bat 2



- **Synchronized** photocell for outside mounting
- Adjustable antenna about 30° along the vertical axes and 210° along the horizontal axes
- Ideal for installations on gates or leaves with limited space for photocells
- (2x1,2V) Battery-powered transmitter with charge through mini solar panel, included in the package
- Prepared for mobile edge on leaf connection
- 10 m / 32.8 feet range
- IP 55 Protection class
- Relay output
- Perfect alignment thanks to the Leds
- **With anti-vandalism metal protection cover**
- **Anti-vandalism front fixing screw**
- Reduced size: h 129x48x42mm / h 5.07x1.88x1.65 "
- 12V-24V power supply

23102141

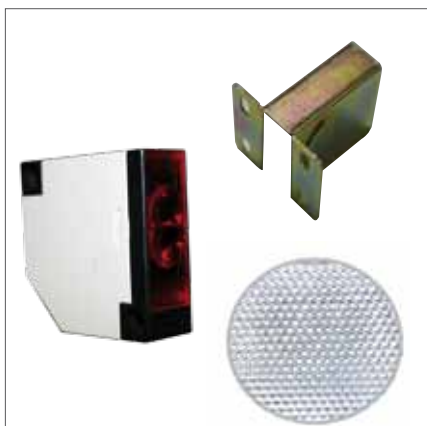

Photoelectric Reflex

- **Reflecting photocell with mirror**
- Relay contact output : 250 VAC 2.5A of resistive
- Detecting distance up to 8 m / 26 feet
- Power supply only on one side and reflecting on the other side
- IP 64 protection class
- Adjustable sensitivity
- Metal fixing support

23102065



General Accessories




Flash Led 24V

- Intense Led light flashing lamp
- High brilliance with only 3 W
- 24V power supply
- About 70% energy saving compared to white-hot bulbs
- Max. maintenance saving
- Polycarbonate cover in 2 colours: yellow and blue

FLASH LED 24V
with blue cover
23104125


FLASH LED 24V
with yellow cover
23104126

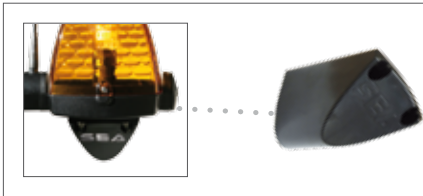

Fix Flash

- Wall support for FLASH-FLASH24V

12710260

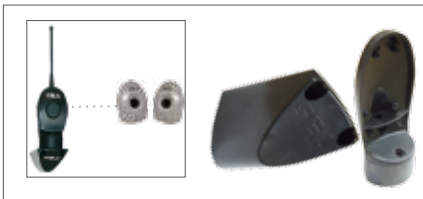

Fix RX

- Wall support for SIGNAL BOX

12710315



Flashing card

- **Multitension and multifunction**
- **24V ac/dc-230V-115V power supply**
- 24V - 3W Led lamp
- Programmable output
 - Fixed switched on light
 - Flashing light
 - Up to 4min. adjustable courtesy light with external command

23105349



Safety Edges



Costa 200 EN

2 m safety edge
EN 12978 Validated

12705050

A% - pcs • B% 20 pcs

Costa 250 EN

2,5 m safety edge
EN 12978 Validated

12705055

A% - pcs • B% 20 pcs

Costa 300 EN

3 m safety edge
EN 12978 Validated

12705060

A% - pcs • B% 20 pcs

Costa Board EN

Control unit for up to 4 edges to respect
the law

12705065

A% - pcs • B% 20 pcs