



ACROSS

Side sill scuff


Installation Instructions

Part number: 99002-53Z00-016

Revision record


| Rev. No. | Date | Page | Step | Remarks |
|----------|------|------|------|---------|
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

99002-53Z00-016

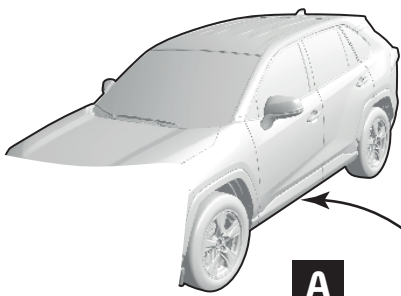

A

PLUG-IN HYBRID

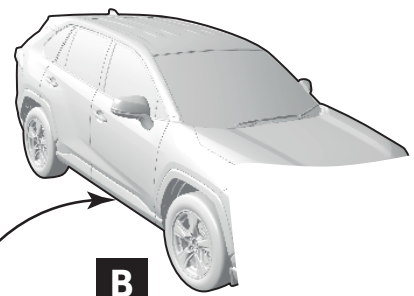

B

PLUG-IN HYBRID


x1

INFO



Material Safety Data Sheet




Technical Data Sheet

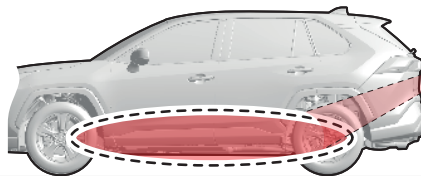



20°C - 40°C




20°C - 40°C






X

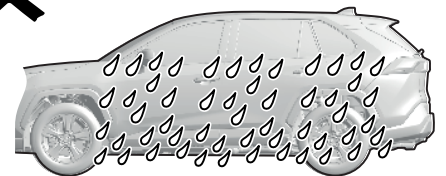


? °C




+ °C

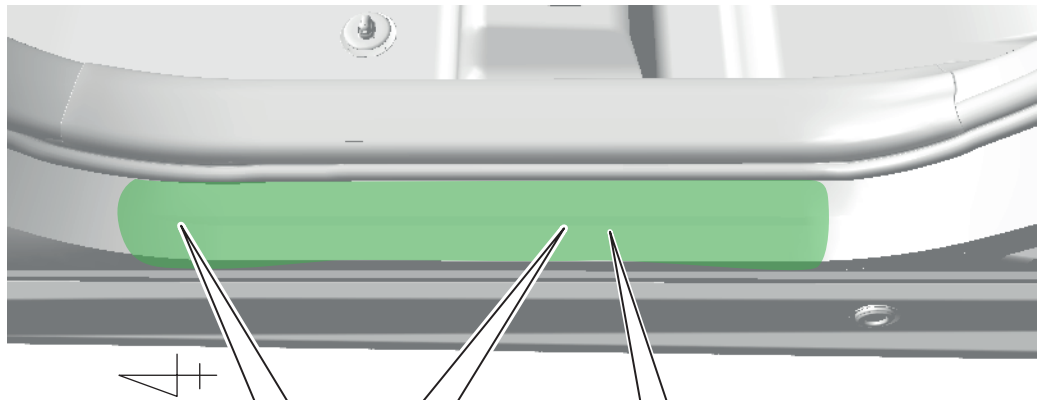

1

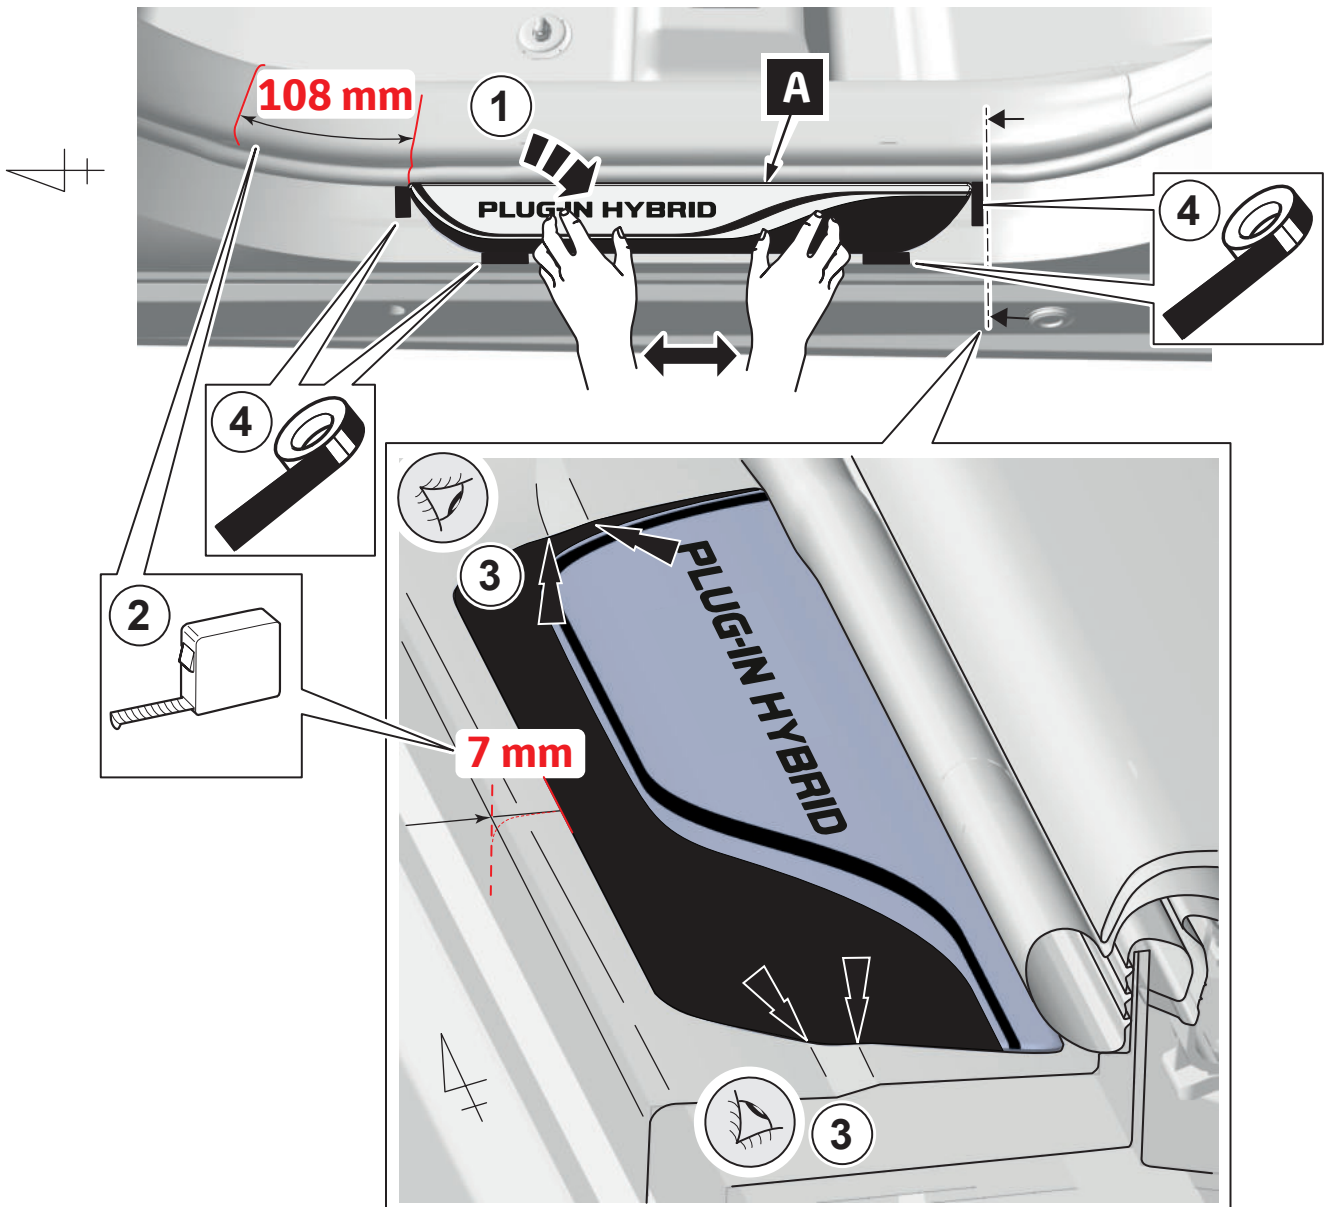

2

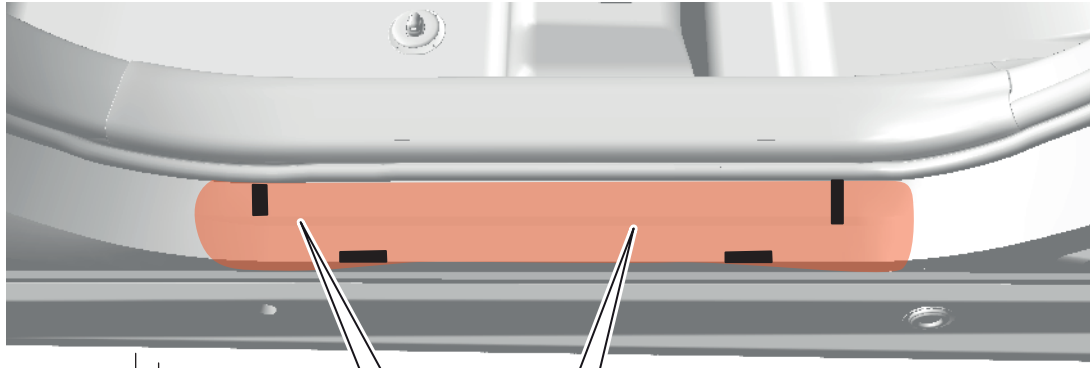




| | | |
|----------------------|---|----------------------|
| <p>1</p> <p>? °C</p> | <p>< 20°C → 2</p> <p>20°C - 40°C → 4</p> | <p>2</p> <p>+ °C</p> |
| <p>3</p> <p>? °C</p> | <p>20°C - 40°C → 4</p> | <p>INFO</p> |

3




| | | |
|-------------------------------|---|----------------------|
| <p>A</p> <p>1</p> <p>? °C</p> | <p>< 20°C → 2</p> <p>20°C - 40°C → 5</p> | <p>2</p> <p>+ °C</p> |
| <p>3</p> <p>? °C</p> | <p>20°C - 40°C → 5</p> | <p>INFO</p> |



4

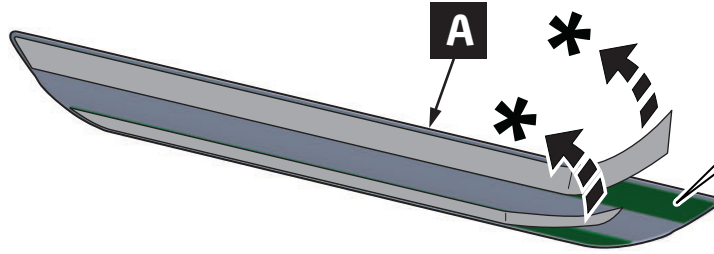


5

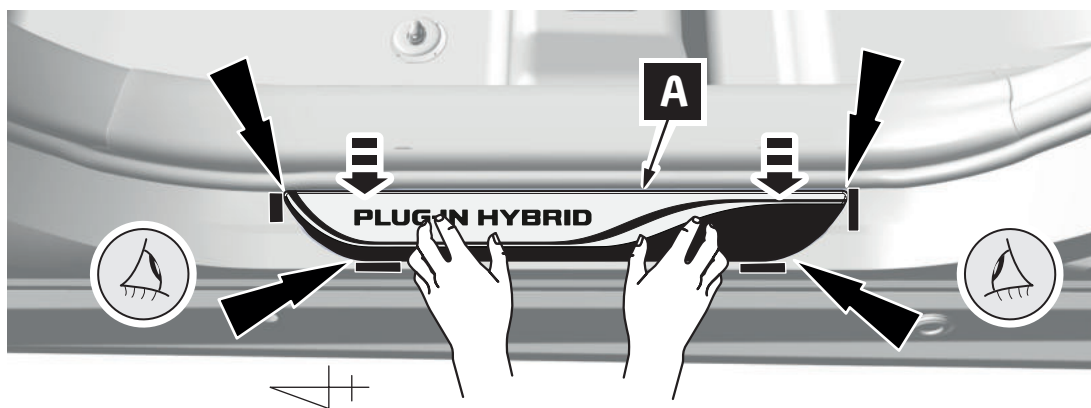

6



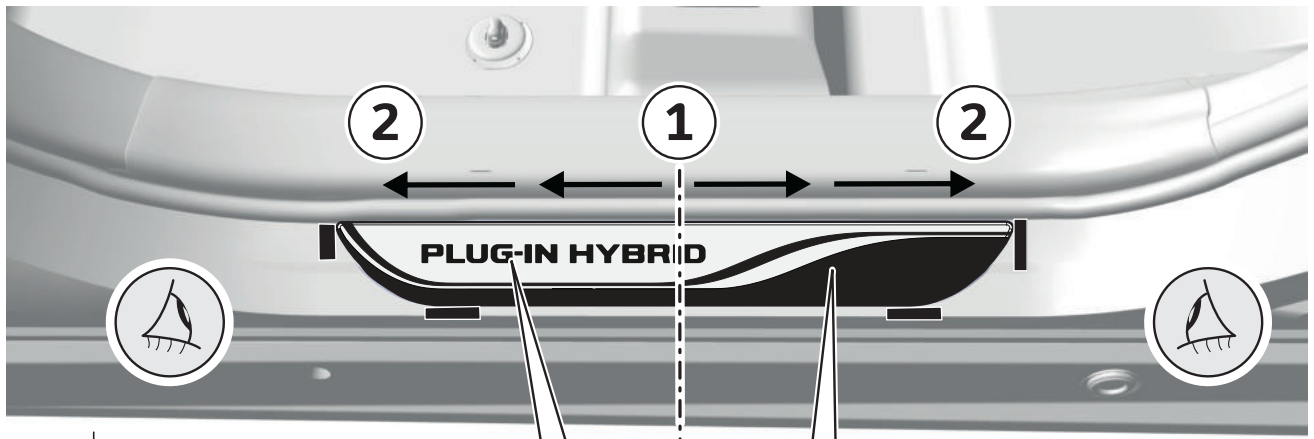


==

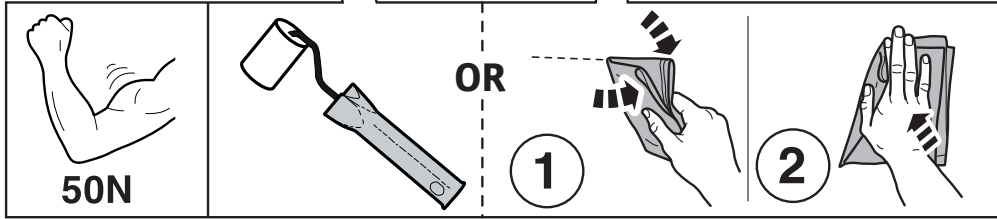


50N


7

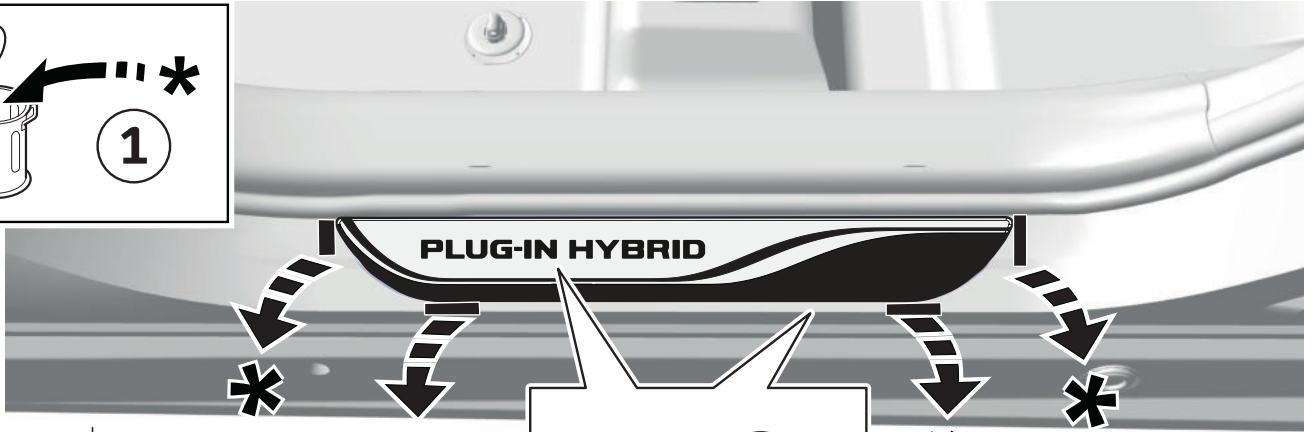

8

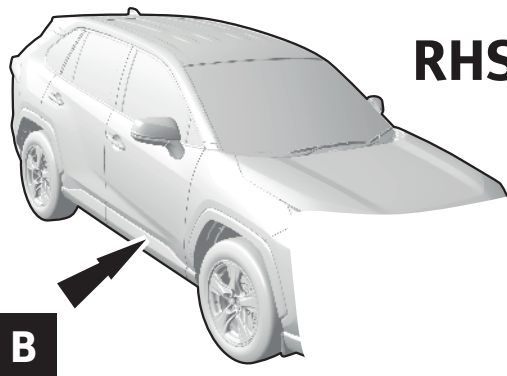

RHS = LHS

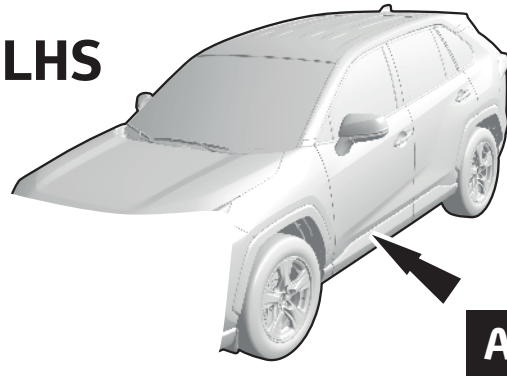

B

A

99002-53Z00-016



9