

Specifications


| | |
|-------------------|--|
| Image Sensor | 1 / 2.7 "CMOS |
| Resolution | 2560 (H) x 1920 (V) 1920 (H) x 1080 (V) |
| Effective Pixels | 5MP / 4MP / 2MP |
| Focal Length | 2.8 – 12mm Varifocal Lens |
| IR Distance | 24pcs Flux IR Up to 100 feet |
| Output Mode | AHD / TVI / CVI / Analog |
| WDR | 115 dB |
| Format | NTSC/PAL |
| Min. Illumination | Color: 0.005 Lux White / Black 0.005 Lux (with IR LED Off) |
| AGC | Auto |
| WB | Auto |
| AES | NTSC: 1 / 60s ~ 1 / 10000s PAL: 1 / 50s ~ 10000s |
| Iris | Auto |
| D/N Conversion | ICR Mechanical Switch |
| Contrast | 10 Level Can Be Adjusted |
| Sharpness | 20 Level Can Be Adjusted |
| Saturation | 20 Level Can Be Adjusted |
| DNR | 15 Level Can Be Adjusted |
| Video System | NTSC |
| S/N Ratio | More than 48 dB |
| Storage Temp. | -40°C ~ 140° C |
| Operating Temp. | -40°C ~ 131° C |
| Power Supply | 12VDC |
| Weight (lb) | 1.3 lbs |




Highlights

- Max 5MP Resolution
- Supports 9 Different Video Formats
- Supports 5MP, 4MP, 2MP, and Analog Resolution
- Supports AHD, TVI, CVI, and Analog Video Formats
- 2.8 – 12mm Varifocal Lens
- IP66 Weatherproof Rated Housing
- 12VDC

Nine formats in one camera

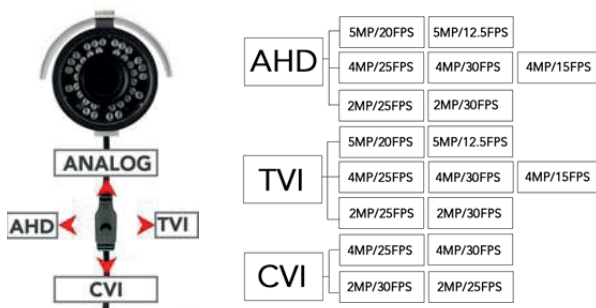

Dimensions

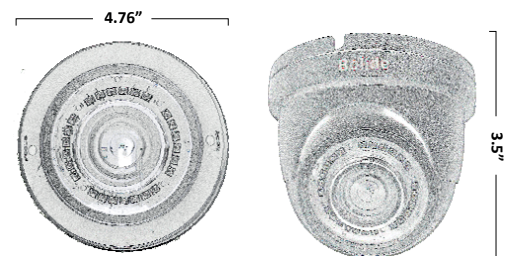

* Specifications Are Subject to Change Without Notice.