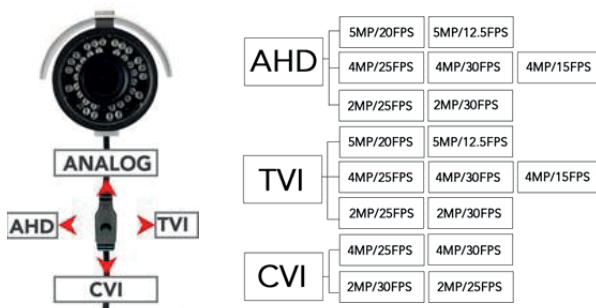
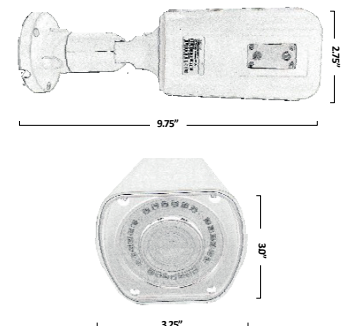



**Specifications**

<b>Image Sensor</b>	1 / 2.7 "CMOS
<b>Resolution</b>	2560 (H) x 1920 (V) 1920 (H) x 1080 (V)
<b>Effective Pixels</b>	5MP / 4MP / 2MP
<b>Focal Length</b>	2.8 – 12mm Varifocal Lens
<b>IR Distance</b>	24pcs Flux IR Up to 263 feet
<b>Output Mode</b>	AHD / TVI / CVI / Analog
<b>WDR</b>	115 dB
<b>Format</b>	NTSC/PAL
<b>Min. Illumination</b>	Color: 0.005 Lux White / Black 0.005 Lux ( with IR LED Off )
<b>AGC</b>	Auto
<b>WB</b>	Auto
<b>AES</b>	NTSC: 1 / 60s ~ 1 / 10000s PAL: 1 / 50s ~ 10000s
<b>Iris</b>	Auto
<b>D/N Conversion</b>	ICR Mechanical Switch
<b>Contrast</b>	10 Level Can Be Adjusted
<b>Sharpness</b>	20 Level Can Be Adjusted
<b>Saturation</b>	20 Level Can Be Adjusted
<b>DNR</b>	15 Level Can Be Adjusted
<b>Video System</b>	NTSC
<b>S/N Ratio</b>	More than 48 dB
<b>Storage Temp.</b>	-40°C ~ 140° C
<b>Operating Temp.</b>	-40°C ~ 131° C
<b>Power Supply</b>	12VDC
<b>Weight (lb)</b>	1.8 lbs

**Highlights**

- Max 5MP Resolution
- Supports 9 Different Video Formats
- Supports 5MP, 4MP, 2MP, and Analog Resolution
- Supports AHD, TVI, CVI, and Analog Video Formats
- 3.3 – 12mm Motorized Varifocal Lens
- IP66 Weatherproof Rated Housing
- 12VDC

**Nine formats in one camera**

**Dimensions**


\* Specifications Are Subject to Change Without Notice.