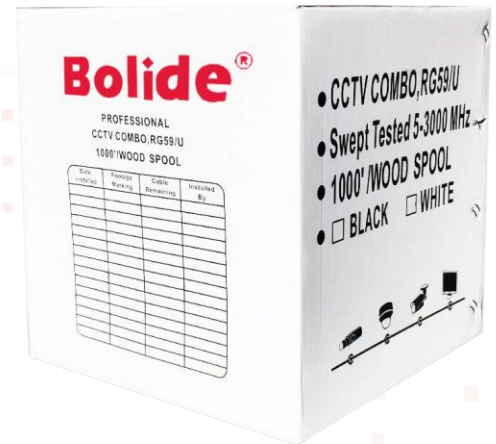


Features:

- RG59 CCAM(Copper Clad Aluminum & Magnesium) 20AWG Center Conductor+18/2 CCTV Stranded Black/Red Power Cable. One Cable Solution
- 20 AWG CCAM Center Conductor. 95% Coverage Braid Shield
- Attached 2 Stranded CCAM 18 AWG 7x0.385mm Black/Red Power Cable
- White Color PVC jacket
- ISO 9000 Certified * Ideal for composite video, RGBHV video, component video and even surveillance systems

Specifications:

Color	White
Length	1000 FT
Dielectric	Gas Injected Foam POE
Conductor	CCAM (Copper Clad Aluminum Magnesium)
Shielding	95% Braid Coverage
Jacket	75° PVC U/V WHITE
Nom. Imp (Ω)	75
Nom. Vel of Prop.	82%
Attenuation (100ft)	Freq. 1 MHz, 0,33 dB
	Freq. 10 MHz, 0,88 dB
	Freq. 50 MHz, 1,85 dB
	Freq. 100 MHz, 2,51 dB
	Freq. 200 MHz, 3,58 dB
	Freq. 4000 MHz, 5,29 dB
	Freq. 700 MHz, 7,45 dB
Product Dimensions	Freq. 900 MHz, 8,7 dB
	Freq. 1000 MHz, 9,31 dB
	13 x 12.9 x 12.7 inches
Item Weight	34.8 pounds


Structure:
