

PETG

DREMC PETG is filament design for improved weather resistance, UV resistances, chemical resistance which make it idea choice for real world application.


Physical Properties

	Testing Method	Typical value
Density	ISO 1183, GB/T1003	1.28 g/cm3
Melt index	250°C/2.15Kg	9 g/10min
Moisture Absorption	ISO 62	<0.2%
HDT	ISO 75 / 0.455 MPa	68°C
Continuous Use	IEC 60216	65°C

Mechanical Properties

	Testing Method	Typical value
Tensile strength	ISO 527	41 Mpa
Elongation at break	ISO 527	10 %
Flexural Modulus	ISO 527	1500 Mpa
Flexural Strength	ISO178	64 Mpa
Impact Strength	ISO180	6 Kj/m ²


Note: PETG is a hygroscopic filament which tend to absorb moisture. We recommended to dry them before use at 55-60°C for 6-18hr.

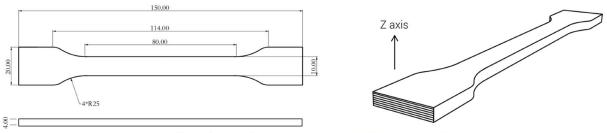

Tensile testing specimen; ASTM D638 (ISO 527, GB/T 1040)



Flexural testing specimen; ASTMD790 (ISO 178, GB/T 9341)

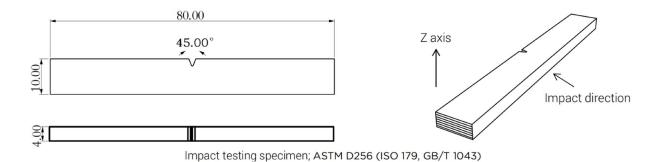

Testing Sample Conditions: Nozzle Diameter 0.4mm Nozzle Temperature: 220 °C Printing Speed: 30-60mm/s Layer: 0.12mm Infill: 100%

DISCLAIMER:

The typical values presented in this data sheet are intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. Actual values may vary significantly with printing conditions. End- use performance of printed parts depends not only on materials, but also on part design, environmental conditions, printing conditions, etc. Product specifications are subject to change without notice.

Each user is responsible for determining the safety, lawfulness, technical suitability, and disposal/recycling practices of DREMC materials for the intended application. DREMC makes no warranty of any kind, unless announced separately, to the fitness for any use or application. DREMC shall not be made liable for any damage, injury or loss induced from the use of DREMC materials in any application.