


12" - 35 W Vintage Ceramic Loudspeaker
C12Q - 8Ω / 16Ω

General Characteristics			
Nominal Overall Diameter		306 mm	12 in
Nominal Voice Coil Diameter		32 mm	1.26 in
Magnet Weight		426 g	15 oz
Overall Weight		1.8 kg	3.97 lbs
Flux Density			0.92 T
Voice Coil Winding Depth		9 mm	0.35 in
Magnetic Gap Depth		6 mm	0.24 in

Thiele-Small Parameters		8Ω	16Ω	
Voice Coil DC Resistance	R_E	6	12	Ω
Resonance Frequency	f_S	87.5	86	Hz
Mechanical Q Factor	Q_{MS}	12.95	10.16	
Total Q Factor	Q_{TS}	2.23	1.99	
Mechanical Moving Mass	M_{MS}	29.7	24.3	g
Mechanical Compliance	C_{MS}	111	137	μm/N
Force Factor	BxL	6.03	8.16	Wb/m
Equivalent Acoustic Volume	V_{AS}	38	46.3	lt.
Maximum Linear Displacement	X_{MAX}	±1.5	±1.5	mm
Reference Efficiency	η_0	1.45	1.2	%
Diaphragm Area	S_D	490.9	490.8	cm ²
Losses Electrical Resistance	R_{ES}	43.2	50	Ω
Voice Coil Inductance @ 1kHz	L_E	0.63	0.95	mH
Electrical Q Factor	Q_{ES}	2.69	2.47	


Constructive Characteristics			
Magnet			Ferrite
Voice Coil Winding			Copper
Voice Coil Former			Epotex
Cone Material			Paper
Surround Material			Integrated Paper
Dust Dome Material			Solid Paper
Basket Material			Pressed Sheet Steel
Surround Treatment			No

Electrical Characteristics		8Ω	16Ω	
Nominal Impedance		8	16	Ω
Rated Power		35	35	W
Musical Power		70	70	W
Sensitivity@1W,1m		93.2	93.9	dB

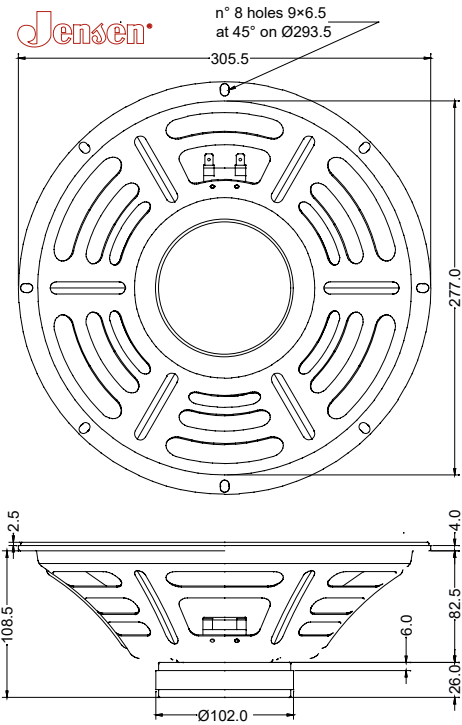

Note: all dimensions are in mm.

Frequency Response on IEC Baffle (DIN45575) @ 1W, 1 m - Free Air Impedance

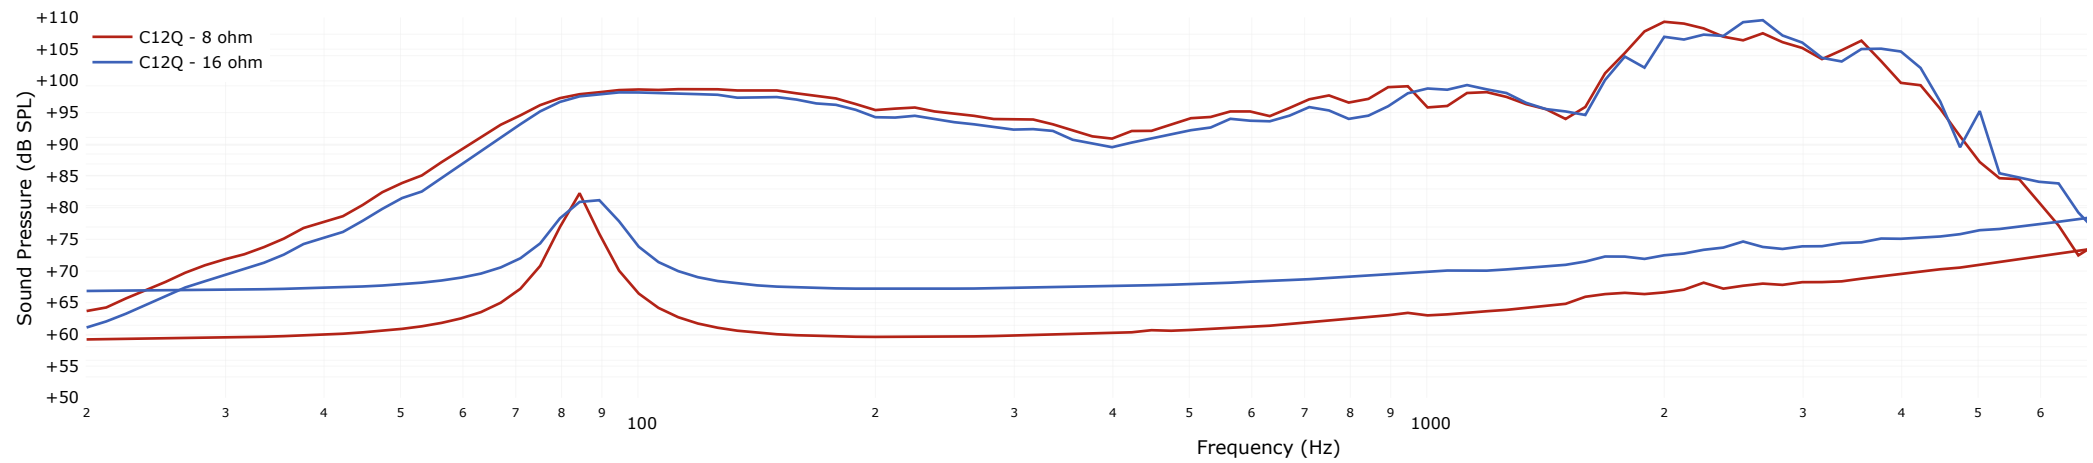



Due to continuing product improvement, the features and the design are subject to change without notice.
Jensen Loudspeakers · website: www.jensentone.com

02/03/2022 - 21:43