


**UNIVERSAL SPECIFICATIONS:**

- **Housing:** Durable die-cast aluminum
- **Housing:** Die-Cast Aluminum
- **Operating Temp:** -40°F — 130°F
- **Input Voltage:** 120-277Vac
- **IP:** UL Wet Location Listed
- **PF:** >0.9 Non-Flicker
- **Efficacy:** 110LM/W
- **THD:** <20%
- **CRI:** >70


**APPLICATIONS:**


Hallways

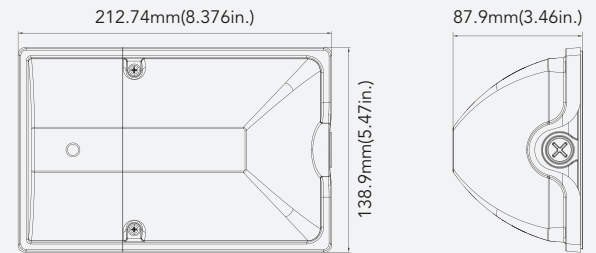


Entryways


 General Walkway  
 Security Lighting

**MODEL SPECIFICATIONS:**

Model	Watt (W)	Lens	Lumens (LM)	Voltage	CCT (K)
LWPE17	17W	Clear	1760LM 1800LM 1820LM	120-277V	3000K 4000K 5000K
LWPE17	17W	Frosted	1600LM 1700LM 1750LM	120-277V	3000K 4000K 5000K
LWPE25	25W	Clear	2500LM 2550LM 2600LM	120-277V	3000K 4000K 5000K
LWPE25	25W	Frosted	2550LM 2600LM 2700LM	120-277V	3000K 4000K 5000K


**ORDERING GUIDE:**

Model	Watt (W)	CCT (K)	Finish (y)	Lens	Photocell (b)
<b>LWPE</b>   LED Wall Pack Entry-Way	<b>17</b>   17W <b>25</b>   25W	<b>30</b>   3000K <b>40</b>   4000K <b>50</b>   5000K	<b>D</b>   Dark Bronze <b>B</b>   Black <b>W</b>   White	<b>C</b>   Clear <b>F</b>   Frost	<b>Blank</b>   No Photocell <b>PS</b>   120-277V Photocell

Choose Your Model Specifications Above:

<b>LWPE</b>	<b>25</b>   25W	<b>50</b>   5000K	<b>W</b>   White	<b>C</b>   Clear	<b>PS</b>   120-277V Photocell
-------------	-----------------	-------------------	------------------	------------------	--------------------------------

 Example Ordering Number: **LWPE25-50-WCPS**