


lampar **ARCH**

LWRL | Waymark

Product Data Sheet

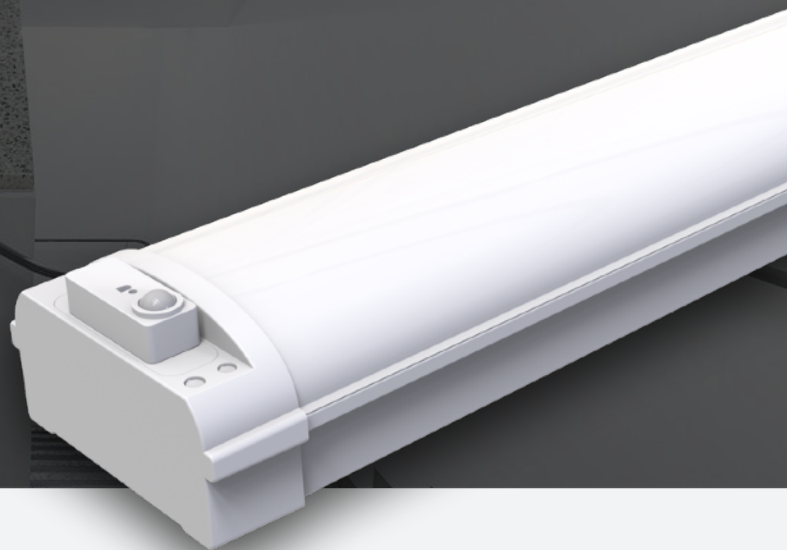

COMMERCIAL-GRADE

Linear Stairwell/Wraparound

2FT | 4FT



Product Overview

The LWRL Waymark-series linear luminaire is a sleek, modern fixture that is perfect for any stairwell or wraparound application.

Featuring seamless light distribution that is superior to competing stamped metal luminaire, the Waymark perfectly lends its clean aesthetic to offices, retail spaces, supermarkets, stairwells and other general commercial lighting applications.

Engineered for easy to install and maintain. It comes with all the necessary hardware and instructions, and it can be installed in minutes. The fixture is also shatter-resistant, so you can be sure that it will last for years to come.

ARCHIPELAGO luminaires and LED components has been tested by independent laboratory in accordance to IESNA LM79 and LM80. LED color temperature is warranted to shift no more than 180K over the standard warranty period. Furthermore, the range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Product Warranty*



7-Year Warranty



75,000 Hrs

* Standard warranty. Extended warranty available.

Applications



Office Space



School




Parking Garages



Stairways

Main Features

- **Steel Housing With Heat-Resistant Frosted Lens** For Long-Lasting Performance In Demanding Environments.
- Choose From **4-Way Selectable Wattages And 0-10V** Dimmability To Create The Perfect Lighting Atmosphere For Any Space.
- Available In **4-Way Selectable CCT** Through Driver-Based Dip-Switches To Match Lighting To The Space.
- **Easy Installation** With Standard Lay-In Or Surface Mount Options.
- **Architectural Design** Is Suitable For Any Office Or Commercial Spaces.
- **Microchip Programmed Light-Engine** For Consistent Color Temperature.
- High-Density LED Chips For **Uniform Light Output**.
- Backed By A **7-Year,75,000 Hour Warranty**.
- **ETL Damp Location** Listed For Use In Damp Locations.
- **DLC Premium** Listed.

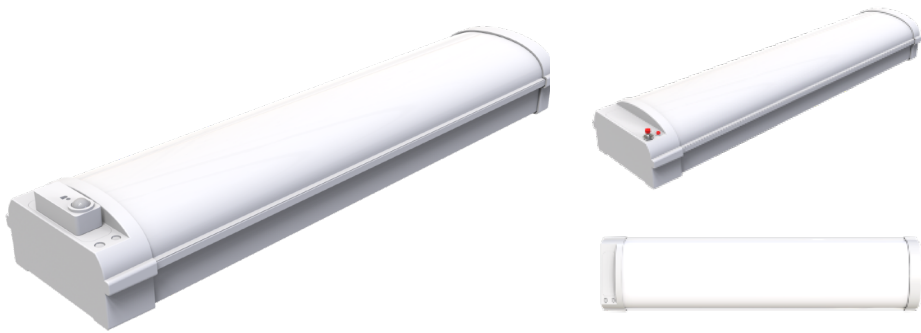

Project Details

Project Name:

Fixture Schedule:

Project Number:

Notes:

Model Specifications

Model Series	Length	4-WATTselect	4-CCTselect	Max Lumen	LPW
LWRL2	2FT	20W 25W 30W 35W	3000K 3500K 4000K 5000K	4375lm	125lm/W
LWRL4	4FT	35W 40W 45W 50W	3000K 3500K 4000K 5000K	6250lm	125lm/W

Key Specifications

- **Dimming Status:** Continuous Dimming <10%
- **Housing:** Cold-Rolled Steel
- **Operating Temp:** 32°F – 104°F
- **IP:** IP20 Indoor Damp Location
- **Input Voltage:** 120-277V
- **PF:** > 0.9 Non-Flicker
- **Efficacy:** 125LM/W
- **Dimming:** 0-10V
- **THD:** <15%

Certifications



Ordering Guide

Model Series	Length	WATTselect (W)	CCTselect (K)	Sensor	Emergency Driver
LWRL Linear Stairwell/ Wraparound	2 2FT	-2035: 20W / 25W / 30W / 35W	CS CCTselect: 3000K / 3500K / 4000K / 5000K /	Blank None -S4T PIR -S4T/BTLE PIR w/ blueARCH	Blank None -EM08 8W
	4 4FT	-3550: 35W / 40W / 45W / 50W			

Note: Default settings are displayed in GRAY. Spec selections and optional accessories are displayed in RED.

Ordering number example:


LWRL2-2035CS-S4T/BTLE-EM08

Please place dashes (-) in correct order.

Choose your model specifications:

LWRL	2	-2035	CS	-S4T/BTLE	-EM08
------	----------	-------	----	------------------	--------------

Model Series Length WATTselect CCTselect Sensor EM

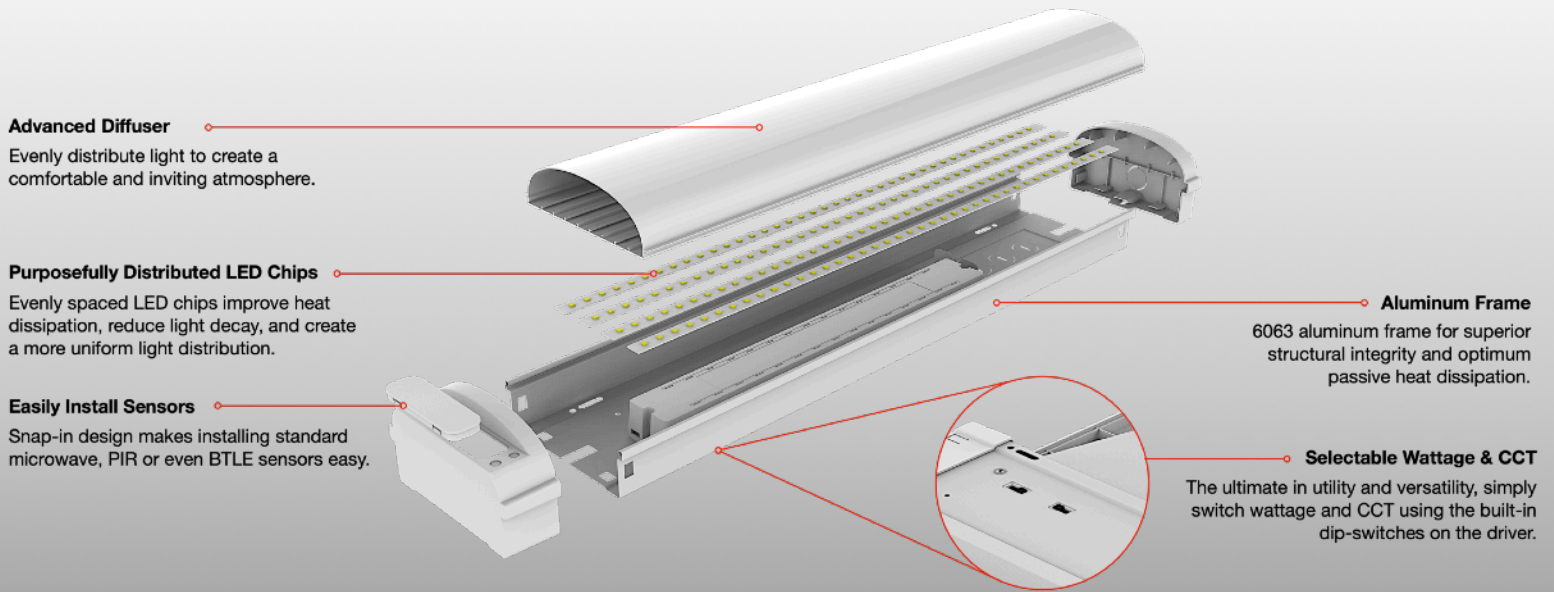

Sizing & Measurements

Model Series	Width (in)	Length (in)	Depth (in)	Weight (lb)	Dimensions
LWRL2-2035CS	5.12	21.54	2.76	1.76	
LWRL4-3550CS	5.12	45.55	2.76	3.19	