


**3M** Science.  
Applied to Life.™

# Solving the challenges of temperature resistance, and multi material bonding.

Take on the most demanding high temperature applications with the new 3M™ VHB™ Tape GPH series.

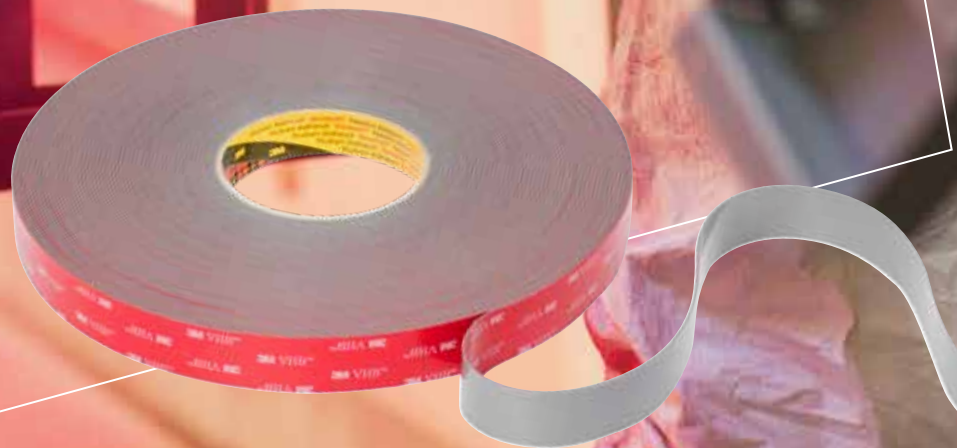

# 3M™ VHB™ Tape GPH Series

The new 3M™ VHB™ Tape GPH series is a permanent bonding solution that can replace traditional mechanical fasteners and liquid adhesives in challenging, high temperature applications. It uses a conformable, acrylic foam core to provide a good balance of strength and conformability. The 3M™ VHB™ Tape GPH series has excellent temperature resistance, making it ideal for permanent bonding where high temperature tolerance is needed, including applications that undergo a powder coat or liquid painting process.

## Features

- Good adhesion to high and medium surface energy materials (metals, glass, plastics) as well as many coated or painted surfaces
- Excellent temperature resistance (short term 230°C and long term 150°C)
- Good solvent resistance
- High initial tack providing strong immediate handling strength
- Conformable foam offers good gap filling and stress relaxation

## High Temperature Applications




3M™ VHB™ Tape GPH's high temperature resistance allows it to be bonded prior to powder coat or liquid painting processes. This reduces the number of "touches," leading to a more streamlined manufacturing process.



The new GPH series offers the speed and ease assembly found in 3M™ VHB™ Tape, even in applications that require long durations of high temperature exposure.

3M™ VHB™ Tapes	Products								
	Product code	Thickness (mm)	Colour	Temperature resistance °C		Relative adhesion		Dimensions	3M ID
				Long term (days, weeks)	Short term (minutes, hours)	Metals Glass MSE Plastics	Coated & Painted Surfaces		
3M™ VHB™ Tape GPH Series, general purpose high temperature, is a grey conformable double coated acrylic foam tape with a high initial tack and a soft foam. Its excellent temperature performance enables bonding of materials in application with high operating temperatures. Further, its capability to bond to a wide variety of substrates makes it a good fit for multi material bonding.	GPH-060GF	0.6	●	+150	+230	high	med	12mm x 33m 18mm x 33m 24mm x 33m	AT019434615 AT019434623 AT019434631
	GPH-110GF	1.1	●	+150	+230	high	med	12mm x 33m 18mm x 33m 24mm x 33m	AT019434649 AT019434656 AT019434664
	GPH-160GF	1.6	●	+150	+230	high	med	12mm x 33m 18mm x 33m 24mm x 33m	AT019434672 AT019434680 AT019434698

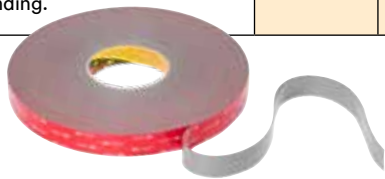

For more information about 3M™ VHB™ Tape GPH, contact your local sales representative.



**3M Australia Pty Ltd**  
**Industrial Adhesives and Tapes Division**  
 Bldg A, 1 Rivett Road  
 North Ryde NSW 2113

Phone 136 136  
 Email 3mindustrialau@mmm.com  
 Web www.3M.com.au

**3M New Zealand Ltd**  
**Industrial Adhesives and Tapes Division**  
 94 Apollo Drive, Rosedale  
 Auckland 0632

Phone 09 477 4040  
 Email 3mznitb@mmm.com  
 Web www.3M.co.nz

Limitation of Liability: Except where prohibited by law, 3M will not be liable for any loss or damage arising from the 3M product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted.

3M and VHB are trademarks of 3M Company.  
 Please recycle. Printed in Australia.  
 © 3M 2018. All rights reserved.  
 AV011466701