


## IN-WALL WIFI CONTROL UNIT REF. 60201 WHITE



Control through Apps powered by Qualcomm AllPlay available such as D-Stream Air, Panasonic Music Stream, Hitachi Wifi, among others for iOS and Android devices.  
IOS devices (min. 7.0) ANDROID devices (min. 4.1).

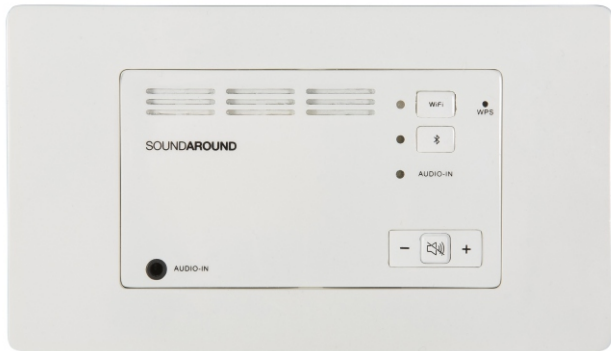

60201	MIN	NORMAL	MAX		COMMENTS
Measurements		175x100x37		mm	exterior (width x height x depth)
		125x75x35		mm	cavity (width x height x depth)
Voltage	12		24	Vdc	terminal VCC - GND
Consumption demand VCC = 12Vdc			14	W	terminals L, R / 16 ohms
			18	W	terminals L, R / 8 ohms
			30	W	terminals L, R / 4 ohms
Consumption demand VCC = 15Vdc			18	W	terminals L, R / 16 ohms
			27	W	terminals L, R / 8 ohms
			45	W	terminals L, R / 4 ohms
Consumption demand VCC = 24Vdc			44	W	terminals L, R / 16 ohms
			60	W	terminals L, R / 8 ohms
Output signal VCC = 12Vdc			3,5+3,5	W	terminals L, R / 16 ohms
			6+6	W	terminals L, R / 8 ohms
			10+10	W	terminals L, R / 4 ohms
Output signal VCC = 15Vdc			5,5+5,5	W	terminals L, R / 16 ohms
			10+10	W	terminals L, R / 8 ohms
			16+16	W	terminals L, R / 4 ohms
Output signal VCC = 24Vdc			15+15	W	terminals L, R / 16 ohms
			25+25	W	terminals L, R / 8 ohms
Input signal		775	1000	mVrms	jack 3,5mm
Dynamic Range		90			
Left/Right channel separation		75		dB	1KHz - 0dBm - 1W out
Distortion		0,1		%	1W out
Wifi transceiver		2,4/5		GHz	
Wifi streaming			24	bits	WAV
			192	KHz	
Antena RF		internal			
Ethernet/LAN		yes			
Multiroom max units in the same network		5	10		Router 1200Mbps / 5GHz band
App support		IOS 7.0 / ANDROID 4.1			minimum versions
Wi-Fi connected		WPS / Webpage			
Bluetooth		BT 4.0			
		A2DP 1.3 (Sink)			
		AVRCP 1.5 (Controller&Target)			
Note: temperature range 5 - 40°C					