

NJ
 8 East Stow Road, Suite 200
 Marlton, NJ 08053
 Tel: 856-988-1802 Fax: 856-988-1803

TX
 325 Exchange Drive
 Richardson, TX 75081
 Tel: 214-352-0000 Fax: 214-352-0002

LILI CEMENT TILE PRODUCT DATA SHEET

CEMENT TILE SPECIFICATIONS

Description	Hydraulic pressed, handmade cement tiles with a color layer of 1/8" thickness adhered to body of the tile using 1800 PSI. Composed of portland cement, marble dust, and mineral pigments.
-------------	---

RECOMMENDED INSTALLATIONS

F Floor	CF Commercial Floor	W Wall	B Backsplash	A Accent	SP Shower Pan
-------------------	-------------------------------	------------------	------------------------	--------------------	-------------------------

Freeze/Thaw Resistance: Untreated cement tiles are not resistant to freeze/thaw cycles and must be treated with a penetrating sealer

Acid Resistance: Cement tiles are not acid resistant and must be cleaned with pH neutral cleaners

Use in Wet Areas: Cement tiles can be used in almost all wet areas, except inside pools. Must be sealed with a penetrating sealer in order to avoid any damage

Grout: Cement tiles must be installed with a quartz based grout in order to prevent staining from standard grout pigments. Please refer to www.lilitile.com for more information


PRE-SEALED TILES

As of April 1st 2019, all new collections and custom tiles are pre-sealed for handling purposes. Pre-sealing protects cement tiles from dirt & stains during the installation process, however, tiles **MUST** be resealed after installation. For optimal results, use Stainproof Original Sealer by Drytreat.

CONTINUED MAINTENANCE

Cement tiles must be cleaned with a non-abrasive, pH neutral cleaning product
Highly acidic cleaning products will cause damage to cement tiles and should be strictly avoided
Avoid using mops or chemicals with abrasive grit, as this could damage the tiles
Avoid using bleach to clean tiles, as this removes the sealer and exposes tiles to staining
Sweeping or mopping tiles regularly will help ensure the durability of cement tiles
Depending on foot traffic, periodic resealing may be necessary
Scratches can be removed using 220 grit sandpaper




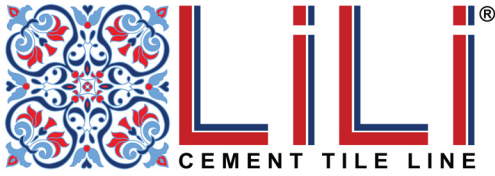

NJ
 8 East Stow Road, Suite 200
 Marlton, NJ 08053
 Tel: 856-988-1802 Fax: 856-988-1803

TX
 1325 Exchange Drive
 Richardson, TX 75081
 Tel: 214-352-0000 Fax: 214-352-0002

LILI CEMENT TILE PRODUCT DATA SHEET

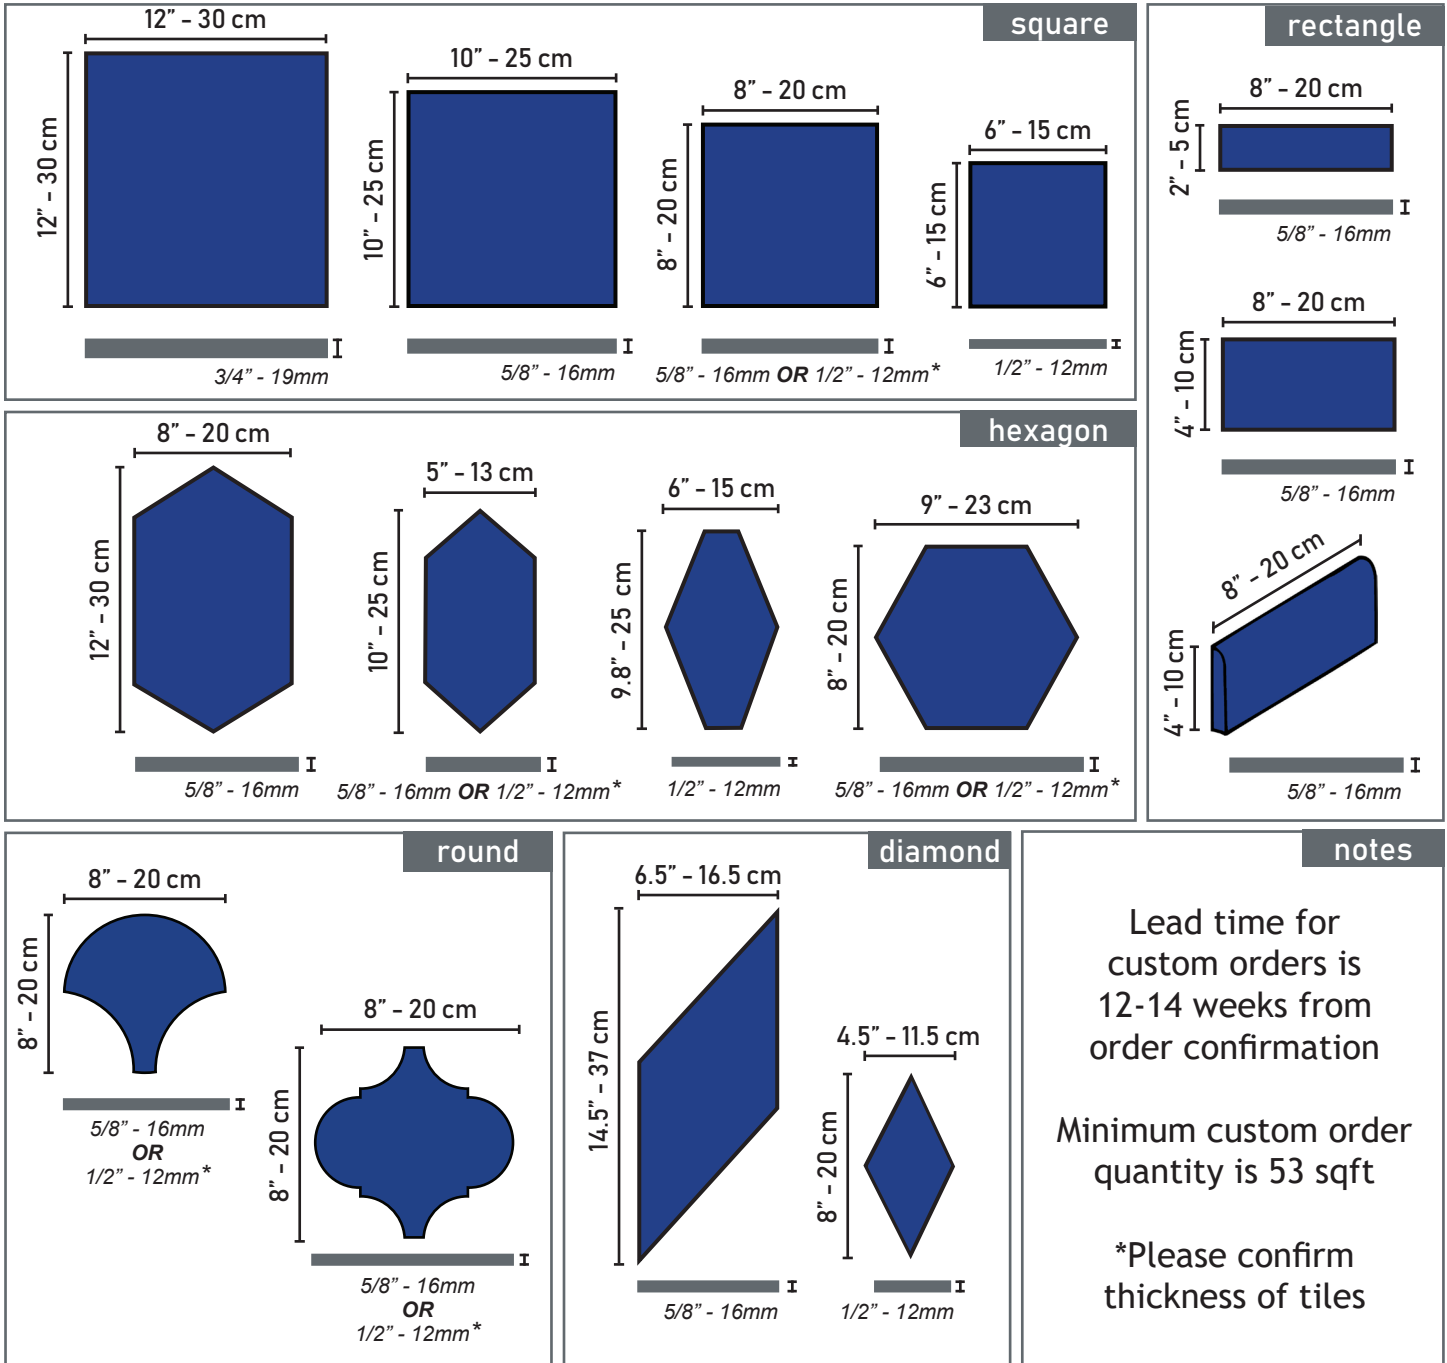

TEST RESULTS

Wet Dynamic Coefficient of Friction (DCOF)	ANSI A137.1 (2012) Section 9.6.1:	0.62
Water Absorption	TCVN 6355 (1998) Section 3:	9.7%
Breaking Bending Load	TCVN 6065 (1995) Section 5.6:	1.18 kN
Relative Resistance to Deep Abrasive Wear	ASTM C1243-93 (2009):	222.6 mm ³