

# 1 Hour Fire Rated Downlight Cover

## FF109-250

Suitable for low profile LED lights up to 6"




The ultra flexible nature of the material allows the cover to get *rolled up* for easy retrofit, remodel, or new construction installation from below the ceiling to protect the *modern*, low profile LED light fixture openings. Flexible to fit standard 2 x 10" joist.

### KEY BENEFITS

- ◆ Easy Installation-can be fitted in seconds-no screws, drilling or additional sealant required.
- ◆ 60 minutes protection.
- ◆ Cover is ventilated to reduce heat build-up.
- ◆ *Flexible* material enables the cover to be fitted around obstacles or retro-fitted.
- ◆ Maintenance free.
- ◆ Enhances the acoustic protection of the ceiling.
- ◆ *Lightweight*
- ◆ Suitable for suspended, plasterboard and concrete ceilings.
- ◆ Available in sizes to fit a range of mains and low voltage downlighters.

### APPROVALS

- ◆ Intertek certified to maintain the fire rating (1hour) of fire-rated floor/ceiling assemblies.

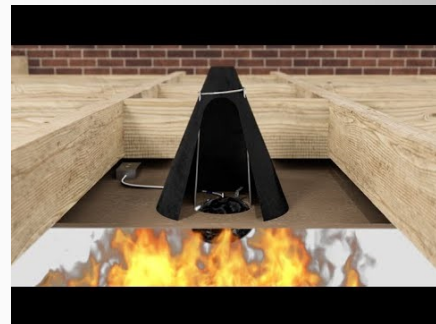

4

3

2

1

F

E

D

C

B

A

F

E


D

C

B

A

1 1/8"


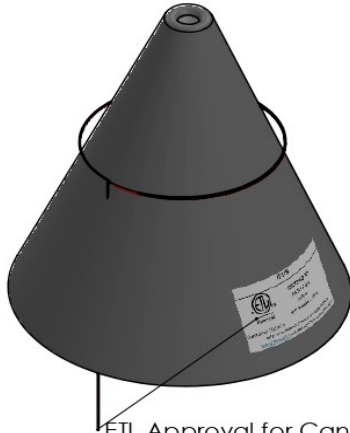


ETL Approval for Canada&USA  
Certifié ETL pour le Canada et les États-Unis


**Remarks/Remarques:**

- Easy Installation** - can be fitted in seconds. No screws, drilling or additional sealant required.  
*Installation facile - peut être installé en quelques secondes. Aucune vis, perçage ou mastic supplémentaire requis.*
- 60 minutes protection.**  
*60 minutes de protection.*
- The cover is ventilated to reduce heat build-up.**  
*La boîtier est ventilé pour réduire l'accumulation de chaleur.*
- Flexible material enables the cover to be fitted around obstacles or retro-fitted.**  
*Le matériau flexible permet de monter la boîtier autour des obstacles ou rétro ajusté.*
- Maintenance free. Lightweight.**  
*Sans entretien. Poids léger.*
- Enhances the acoustic protection of the ceiling.**  
*Améliore la protection acoustique du plafond.*
- Suitable for suspended, plasterboard and concrete ceilings.**  
*Convient aux plafonds suspendus, en plaques de gypse et en béton.*

Suitable for low profile LED lights up to 6"  
Convient aux lumières LED à profil bas jusqu'à 6"

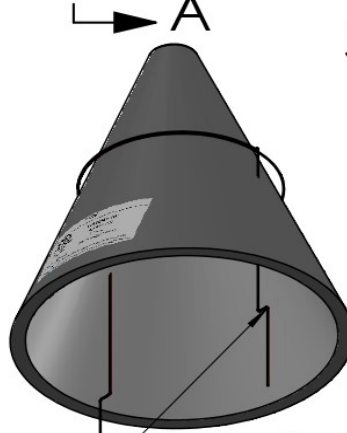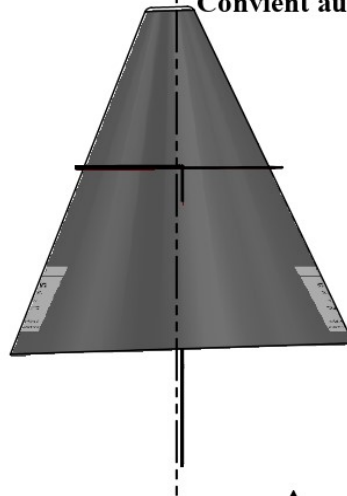


Fixing/Positioning Wire  
Fil de Fixation/Positionnement

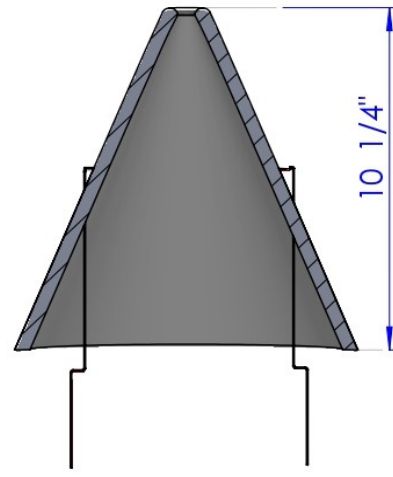

SECTION A-A



UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES SURFACE FINISH: Black Colour TOLERANCES: NA-Flexible Material LINEAR: NA ANGULAR: NA		FINISH: <b>Black Colour on Exterior</b> Couleur noir à l'extérieur	This Fire Rated Cover is having Flexible Material  <i>Boîtier de protection ignifuge pour luminaire encastré avec matériau flexible</i>	DO NOT SCALE DRAWING	REVISION: 0
NAME	SIGNATURE	DATE		 <b>GlobalNgeering</b> 2370 Midland Ave. Unit B1 2 Toronto, ON M1S 5C6 www.GlobalNgeering.com Tel: 647 270 9450 emanuel.civcur@globalngeering.com	TITLE: FF109-250 1h Fire Rated 6" LED Light Cover FF109-250 Boîtier de protection ignifuge pour luminaire encastré 6" LED avec résistance au feu de 1 heure
DRAWN Emanuel C. Civcur	GlobalNgeering	22.10.22			
CHKD					
APPVD					
MFG					
Q.A			MATERIAL: Intumescent Mineral Rock Wool Roche Minérale Intumescente	DWG NO. <b>FF109-250</b>	A4
			WEIGHT: approx. 0.6 lbs	SCALE: 1:5	SHEET 1 OF 1

4

3

2

1