




# GlobalNginneering

## Installation and Safety Instructions

### RECESSED LIGHT ATTIC INSULATION COVER


#### Step 1

Place the cover over the light fixture. For optimal performance make sure that the flange of the cover is in contact with the drywall.




#### Step 2

If necessary, slit the cover to fit over the hanger bars and the wiring of the fixture.



#### Step 3

The Recessed Light Cover is compatible with all kind of insulation, including sprayed foam, mineral wool, fiber glass and blown-in cellulose.



**NOTE: FOR APPLICATIONS IN FIRE RATED CEILINGS (1 & 2 HR) USE FF109 COVERS.**

**WARNING:** BE SURE THE ELECTRICITY TO THE SYSTEM YOU ARE WORKING ON IS TURNED OFF; EITHER THE FUSE REMOVED OR THE CIRCUIT BREAKER SET AT OFF.

#### CONTAINS STONE WOOL INSULATION

Stone fibers may cause temporary mechanical irritation to the skin, throat, nose and eyes.

#### FIRST AID

##### Skin

If irritation occurs, do not rub or scratch. Rinse under running water prior to washing with mild soap and water. Consult a physician if irritation persists.

##### Throat and Eyes


If irritation occurs, flush eyes with water and/or drink water to clear throat. Do not rub the eyes. Consult a physician if irritation persists.

#### PRECAUTIONS

- Wear long sleeve, loose fitting clothing, gloves and eye protection.
- For additional information, refer to the Material Safety Data Sheet (MSDS).

Model Number	Outside Height	Outside Length	Outside Width
FF130E	9 1/2"	15"	14"

### RECESSED LIGHT ATTIC INSULATION COVER

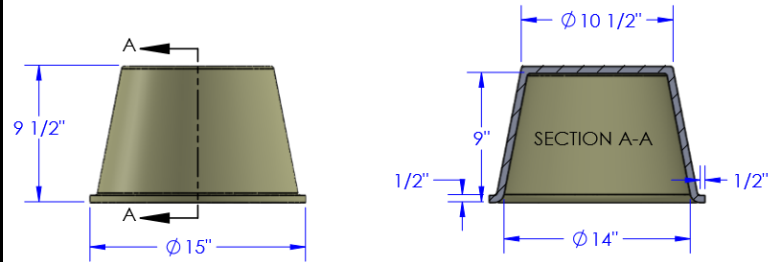


#### MAXIMUM LAMP WATTAGE AND TYPE

USE WITH LAMP TYPES AND WATTAGE AS RECOMMENDED BY THE LIGHT MANUFACTURER OR BY THIS SHEET, WHICHEVER IS LOWER, IN ORDER TO AVOID THERMAL OVERLOAD.



Compact Fluorescent Lamps 120V  
**13W**  
**18W**  
**26W**  
**32W**



Directional Lamps  
**65W, BR 30**  
**90W PAR38**



LED Lamps 120V  
**18W PAR38**

42W



Do not use with energy inefficient light bulbs!



**WARNING - USE WITH LAMP TYPES & WATTAGES AS INDICATED ABOVE.**

FOLLOW THE LIGHT MANUFACTURER'S RECOMMENDATIONS FOR INSTALLATION WITHIN ENCLOSED SPACES.

NOTICE - FOR USE WITH THERMALLY PROTECTED FIXTURE ONLY. BLINKING LIGHT MAY INDICATE IMPROPER LAMP SIZE.

#### GlobalNginneering Ltd

2370 Midland Ave, Unit B12  
 Scarborough, ON, M1S 5C6  
 Phone: 647 270 9450

Email: emanuel.ciucur@globalNginneering.com  
 www.globalNginneering.com

