
DocuPrint P285 dw / M285 z A4 Monochrome Single and Multifunction Printers

Designed to take your productivity to the next level



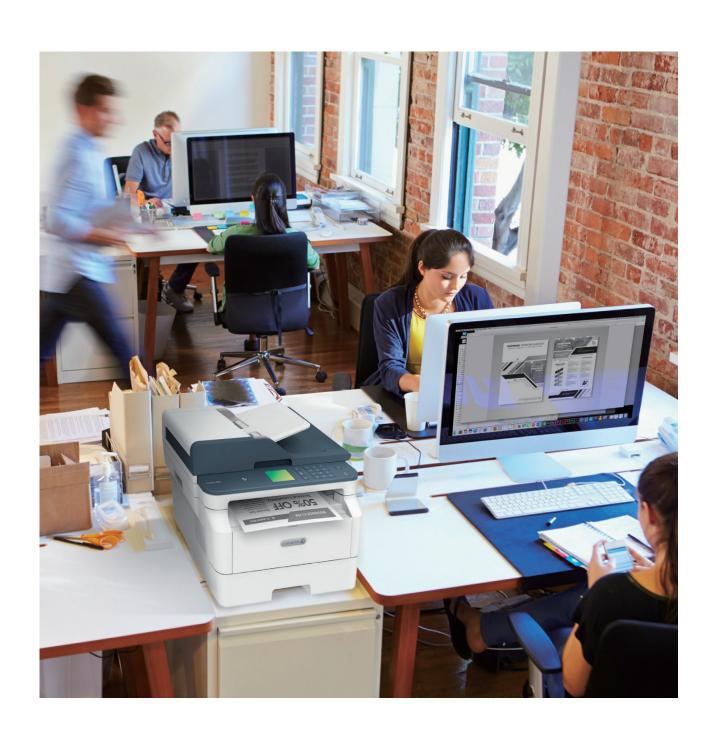

Smart, Powerful and Efficient Performance

The Fuji Xerox DocuPrint P285 dw and M285 z are the perfect solution for small and medium business workgroups who require high quality, fast and efficient monochrome printing with flexible connectivity capabilities in a compact size.

PERFORMANCE AND RELIABILITY

- Speed and Quality With speeds of up to 34 pages per minute the 285 series supports print resolutions of up to 1200 x 1200 dpi, delivering the highest quality, faster print speed and first-page-out-time.
- Innovation and Reliability Building on Fuji Xerox's reputation for reliability the entire range includes simple engineering, easy operation and outstanding printing designed to give trouble free printing whenever you need it.
- Single Pass Duplex Automatic
 Document Feeder (SPDADF) —
 the DocuPrint M285 z comes equip with
 50-sheet feeder to be scanned in one
 single pass, reducing processing and
 waiting time.

AFFORDABLE, EFFICIENT PRINTING

- Lower running costs Printer costs are far more than the initial purchase, and this range of Fuji Xerox printers is designed to keep overall running costs lower to suit your business needs with a choice of 3K toner or 4.5K toner.
- Reduced toner use With toner save mode, the printers can extend the life of your toner cartridge by varying the toner density during printing, saving money with every print.
- Use less paper By using the clever N-UP print feature, you can print multiple pages on a single sheet of paper, saving toner as well as paper, reducing the costs of your printing even further.


INCREASE PRODUCTIVITY WITH SMART FEATURES

- Duplex Printing and WiFi as standard across the range With duplex printing standard across the range, these printers offer increased productivity and reduced costs combined with ease of use.
- Easy to use touch screen Interface the DocuPrint M285 z features a 2.7" colour touch screen interface that is simple to use. Quickly produce the quality prints you need through the clear, simple interface that makes walk up functions easy to access.
- Clever ID Card Copying This allows you to quickly copy both sides of an ID card onto one piece of paper, just copy one side, then the reverse and the printer does the rest. No need to move paper, put the card in a different location, just a quick, easy solution that saves time and money.



CLEVER ID CARD COPYING

The easy-to-use ID card copy feature allows you to copy both sides of the card onto the same side of the paper. Simply place an ID card both face up & down on the copier surface, pressing the start button each time.

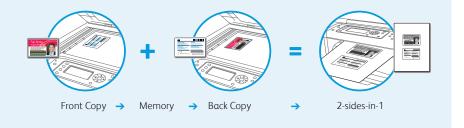

STAY CONNECTED WITH ADVANCED MOBILE PRINT CONECTIVITY

Whatever device you need to print from, you can do so quickly and easily.

The DocuPrint P285 dw / M285 z feature the most comprehensive connectivity solutions available today.



AirPrint

Effortlessly print with an AirPrint-enabled printer from your iOS devices without the need to install a drive or configure the printer queue.



Google Cloud Print Ready

Simply connect your Fuji Xerox printer to the Internet. Allows you to print from any applications running on a phone, tablet, chrome device, PC and any other web-connected device directly onto the printers.



Wi-Fi Direct

Seamlessly connect and print quickly and easily with your Wi-Fi Direct enabled device without the use an access point.



Fuji Xerox Print Utility

Whether it is an iOS or Android device, the Fuji Xerox Print Utility enables users to print and scan conveniently and directly at your fingertips. Download the app today from the App Store for iOS or Play Store for Android.



Mopria Certified

Print your business documents with your Android smartphones and tablet devices by connecting to any Mopria-certified Fuji Xerox printer. Mopria print services can be downloaded free from Google Play TM Store (Android 4.4 or later).



Near Field Technology

Simply tap to connect, print or scan with an NFC enabled device.



Users can tap any NFC enabled device to print or scan via Fuji Xerox Print Utility*. Simply select the photo or document you wish to utilise and tap your device to your DocuPrint P285 dw / M285 z.

DocuPrint P285 dw / M285 z Specifications

Product Name	DocuPrint P285 dw	DocuPrint M285 z
Function Print Function	A4 Monochrome Printer	A4 Monochrome Multifunction
Print Speed (A4) ¹	Up to 3	4 ppm
Duplex Print Speed (A4)	Up to 8 ppm (16 sides per minute) Up to 1200 x 1200 dpi at full speed	
Print Resolution First-page-out Time (A4 SEF) (At 23°C from ready mode)	7 second	J dpi at full speed
Warm-up Time at 23°C	4 seconds or less (from Sleep Mode)	4 seconds or less (from Sleep Mode)
•	26 seconds or less (from Power Up)	28 seconds or less (from Power Up)
Memory	128 MB	256 MB
Processor	600	
PDL Operator Panel	PCL6, PS3	emulation 2.7" Colour Touchscreen
Connectivity	Wireless, 10 Base-T/100Base-	TX Ethernet, USB2.0 Hi-Speed
Network protocol	IPv4: ARP, RARP, BOOTP, DHCP, APIPA(Auto IP), WINS/NetBIOS name resolution, DN: (FTP Server), SNMPv1/v2c/v3, HTTP/HTTPS Server, IFTP C IPv6: NDP, RA, DNS Resolver, mDNS, LLMNR responder, LPR/LPD, Custom Rav TFTP Client and Server, SMTP Clie	Sresolver, mDNS, LLMNR responder, LPR/LPD, Custom Raw Port/Port 9100, IPP/IPPS Llient and Server, SMTP Client, ICMP, Web Services (Print) Y Port/ Port 9100, IPP/IPPS, FTP Server, SNMPv1/v2c/v3, HTTP/HTTPS Server, Int, ICMPv6, Web Services (Print)
Mobile Print	AirPrint, Google Cloud Print, FX F Mopria Certified, Near F	Print Utility for iOS and Android ,
Supported Operating System ⁸	Windows® 7(32/64), Windows® 8.1(32/64), Windows 10(32/6	
Supported Operating System	Windows 7 (32704), Windows 3 (32704), Windows 10 (32704)	
Automatic Duplex Printing	Ye	25
Input Paper Size (Paper Tray)	ANZ/TW/KR/CH config : A4 SEF, Letter SEF, A5 SEF/LEI	F, A6 SEF, 16K(China only), 210x270mm(Taiwan only)
Media Input Capacity (Paper Tray)	AP/IDN config Universal Tray: Folio (8.5" x 13") SEF, Lego	al Ser, Executive, A4 Ser, Letter Ser, A5 Ser/Ler, A6 Ser ts 80gsm
Media Input Capacity (Multi-purpose Tray)	30 sh	eets
Input Paper Size (Multi-purpose Tray)	Width 76.2~216 mm, Length 127~355.6m	nm Envelope (COM-10, Monarch, C5, DL)
Media Output Capacity	150 sheets 80gsm (Face down), 1 sheet (Face up with rear cover open) Plain paper, Recycled paper,	170 sheets 80asm (Eace down) 1 sheet (Eace up with rear cover open)
Media Types (Main Tray, or Duplex) Media Types (Multi-purpose Tray)	Plain paper, Recycled paper, Plain paper, Thick paper, Recycled	onner lahel envelone hond naper
Input Paper Weight (Paper Tray)	60 to 10	53 gsm
Input Paper Weight (Multi-purpose Tray)	60 to 2	30 gsm
Automatic Document Feeder Single pass Duplex Automatic Document Feeder	_ _	Yes Up to 50 sheets
Monthly Max. Duty Cycle		ones Op to 50 sneets
Machine Life	50K page (Duplex 2	5k page) or 5 years
Print Features	Toner Save Mode, N-up(2,4,9,16, or 25)9, Poster5(4,9,16,25), Header/Footer5(time & do	ate and/or user ID), Watermarks ^s , manual duplex printing ^s , manual booklet printing
Dimensions (WxDxH) Weight (without supplies)	356.0 x 388.0 x 183.0 mm 6.9 kg	410.0 x 426.5 x 318.5 mm 11.6 kg
Operating Environment Temperature	Storage: 0° C to 40° C, Op	eratina: 10°C to 32 5°C
Humidity	Operating Environment: 20% to 80%R	H (without condensation), 23° C 10%
Acoustics: Sound Pressure level	Printing: 49 o	dB(A) or less
Flantainal Dance	Ready: 30 d For AP & China model (excluding	IB(A) or less
Electrical Power	For AP & Child model (excluding	
Power consumption ²	Ready/Standby: 48/48W (220-240V/110-120V);	Ready/Standby: 42/43.5W (220-240V/110-120V);
	Printing: Approx. 510/546W (220-240V/110-120V);	Printing: Approx. 475/450W (220-240V/110-120V);
TEC value	Deep Sleep: 0.6/0.6W (220-240V/110-120V); 1.2 kWh/week 220-240V	Deep Sleep: 1.1/1.2W (220-240V/110-120V); 1.3 kWh/week 220-240V
TEC value	1.4 kWh/week 110-120V	1.5 kWh/week 220-240V
Wireless Specification		
Wireless LAN	IEEE 802.11b/g/n (Infrastructure), IEEE 802.11g/n (Wi-Fi Direct ^{IM})
Wireless Network Security Network security (Wireless)	WEP 64/128 bit, WPA-PSK(TKI SMTP-AUTI	P/AES), WPAZ-PSK(TKIP/AES)
Wireless Certification	Wi-Fi Certification Mark Lice	nse (WPA/WPA2-Personal)
	Wi-Fi Protected Setup (WPS) Identifier Ma	
NFC	Ye	es .
Copy Function		H= t= 3/
Copy Speed (A4) ¹ Copy Resolution	_	Up to 34 cpm
		Up to 600 x 600 dpi
First-copy-out Time	-	Up to 600 x 600 dpi Flat Bed: 9 seconds or less
First-copy-out Time (Simplex at 23°C from ready mode)	-	Flat Bed: 9 seconds or less ADF: 10 seconds or less
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement	- - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 %
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy	_ _	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N≥2, 4), Sort (Up to 99 pages)
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy	- - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type	- - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan	- - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution	- - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scapper Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi / (mono)
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan	- - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scan Depth	- - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono/ Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Output 8 bit
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Second Function Type Automatic 2-sided scan Scanning Resolution Scan Depth	- - - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono. colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scan Depth Document Size	- - - - - - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono. colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scan Depth Document Size Scan Destinations	- - - - - - - - -	Flat Bed: 9 seconds or less
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Iype Automatic 2-sided scan Scanning Resolution Scan Enerties Scan Function Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver	- - - - - - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length 147,3-355.6mm
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution	- - - - - - - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 5.1/Windows® 10 AirPrint usage (TWAIN, ICA) for OS 10.11/10.12/10.13
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver Fax Function Compatibility	- - - - - - - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 cpying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono. colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300,mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 1.0 AirPrint usage (TWAIN, ICA) for 05 10.11/10.12/10.13
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scanning Resolution Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver Fax Function Compatibility Communication System	- - - - - - - - - - - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300-mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 8.1/Windows® 10 AirPrint usage (TWAIN, ICA) for OS 10.11/10.12/10.13 ITU-T Super G3 PSTN
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Sean Function Type Automatic 2-sided scan Scanning Resolution Scan Depth Document Size Scan Depth Document Size Scan Destinations Supported Driver Fax Function Compatibility Communication System Modern Speed	- - - - - - - - -	Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 cpying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono. colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300,mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 1.0 AirPrint usage (TWAIN, ICA) for 05 10.11/10.12/10.13
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver Fox Function Fox Function Communication System Modem Speed Memory Transmission		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 5.1/Windows® 10 ITU-T Super G3 PSTN Up to 33.6Kbps up to 500 pages *
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver Fox Function Compatibility Communication System Modem Speed Memory Transmission Out-of-paper reception Fax Resolution		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copyina (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length 147,3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 8.1/Windows® 10 AirPint usage (TWAIN, ICA) for 05 10.11/10.12/10.13 ITU-T Super G3 PSTN Up to 33.6kbps up to 500 pages* Superfine 8dot/mm x 15.4line/mm
First-copy-out Time (Simplex at 2-3°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scan pepth Document Size Scan Destinations Supported Driver Fax Function Compatibility Communication System Modern Speed Memory Transmission Out-of-paper reception Fax Resolution Fax Resolution Fax Resolution Out-of-paper reception Fax Resolution		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS **Se** Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono. colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300rm; ADF: max Width 105–215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTF Windows*: TWAIN, WIA for Windows Windows* 7/Windows* 8.1/Windows* 10 AirPhint usage (TWAIN, ICA) for OS 10.11/10.12/10.13 ITU-T Super G3 PSTN Up to 33.6Kbps up to 500 pages* up to 500 pages* Superfine 8dot/mm x 15.4line/mm Up to 200 locations
First-copy-out Time (Simplex at 2-3°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver Fax Function Compatibility Communication System Modem Speed Memory Transmission Out-of-paper reception Fax Resolution Speed Broak Resolution		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono. colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300,mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 1.0 AirPrint usage (TWAIN, ICA) for 05 10.11/10.12/10.13 TIU-T Super G3 PSTN Up to 33.6Kbps up to 500 pages* up to 500 pages* Superfine 8dot/mm x 15.4line/mm Up to 200 locations Up to 250 locations Up to 250 locations
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scanning Resolution Scanning Resolution Scanning Resolution Scanning Resolution Scanning Resolution Figure Scanning Resolution Speed Dides Speed Dides		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono/colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTF Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 8.1/Windows® 10 AirPint usage (TWAIN, ICA) for OS 10.11/10.12/10.13 ITU-T Super G3 PSTN Up to 33.6Kbps up to 500 pages * Superfine 8dat/mm x 15.4line/mm Up to 200 locations Up to 250 locations PC Fax Send and Receive (Windows Only)
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver Fox Function Compatibility Communication System Modem Speed Memory Transmission Out-of-paper reception Fox Resolution Speed Dials Broadcasting Fox Features Warranty Consumbles		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (monor colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTF Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 8.1/Windows® 10 AirPrint usage (TWAIN, ICA) for OS 10.11/10.12/10.13 ITU-T Super G3 PSTN Up to 33.6Kbps up to 500 pages* up to 500 pages* Superfine 8dot/mm x 15.4line/mm Up to 200 locations Up to 250 locations PC Fax Send and Receive (Windows Only) inters reseller for more information
First-copy-out Time (Simplex at 2-37° Efrom ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scanning Resolution Scanning Resolution Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver Fax Function Compatibility Communication System Modem Speed Memory Transmission Out-of-paper reception Fax Resolution Speed Dials Broadcasting Fax Features Worranty Consumables Shipped consumables		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copying (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono colour) Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105 - 215.9 x Length 147.3 - 355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 8.1/Windows® 10 AirPrint usage (TWAIN, ICA) for 05 10.11/10.12/10.13 ITU-T Super G3 PSTN Up to 33.6Kbps up to 500 pages* up to 500 pages* up to 500 pages* Superfine 8dot/mm x 15.4line/mm Up to 250 locations PC Fax Send and Receive (Windows Only) inters reseller for more information d approx. 12,000° pages drum
First-copy-out Time (Simplex at 23°C from ready mode) Reduction / Enlargement Multi-Copy Copy Feature Automatic 2-sided copy Scan Function Type Automatic 2-sided scan Scanning Resolution Scanning Resolution Scan Depth Document Size Scan Destinations Supported Driver Fax Function Compatibility Communication System Modem Speed Memory Transmission Out-of-paper reception Fax Resolution Speed Dials Broadcasting Fax Features		Flat Bed: 9 seconds or less ADF: 10 seconds or less 25 - 400 % Up to 99 ID Card Copy, N in 1 copyling (N=2, 4), Sort (Up to 99 pages) Yes Colour CIS Yes Optical: (Scanner Glass) up to 1200 x 1200 dpi / (ADF) up to 600 x 600 dpi (mono Enhanced: up to 19,200 x 19,200 dpi / Output 8 bit Platen: max 215.9mm x 300mm; ADF: max Width 105-215.9 x Length 147.3-355.6mm Scan to PC and application (Email, Image File) by ControlCenter utility, Scan to FTI Windows®: TWAIN, WIA for Windows Windows® 7/Windows® 8.1/Windows® 10 AirPrint usage (TWAIN, ICA) for OS 10.11/10.12/10.13 ITU-T Super G3 PSTN Up to 33.6Kbps up to 500 pages * up to 500 pages * Superfine 8dot/mm x 15. 4line/mm Up to 200 locations Up to 250 locations PC Fax Send and Receive (Windows Only) inters reseller for more information d approx. 12,000 * pages drum 2877

¹ Print/copy speed may decrease due to fators such as paper type, paper size, and printing conditions. ² Measure when the machine is connected to the USB interface. ³ Declared yield in accordance with ISO/IEC 19752. Yield will vary based on image area coverage and print mode. ⁴ Drum yield may vary by the type of use. ³ Windows Only ⁸ Mac drivers are available by web download. ³ Max 1200 x 1200 d jos canning with WIS (Windows Image Acquisition) driver in Windows 7 and Windows 8.1 aug to 19200 x 19200 d jo can be chosen by using the scanner utility. ⁴ Only network printing supported on Windows Server OS. ⁵ Nu p for Mac (2.4,6.9, or 16). All product names and company names mentioned in this brochure are trademarks or registered trademarks of the respective companies. ⁴ TIU-T Test Chart, Standard resolution



This product has been tested and found to comply with the Class 1 Laser Equipment requirements defined by the international standard IEC60825-1:2007 and has no light exposure hazard. The product has no hazardous light emission as it features light protection components and covers to shut in all light beam during operation and maintenance. Internat Laser radiation Wave length: 770 - 800 nm Output: 25 mW and. Laser Class: Class 3B

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law: Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.













beriot using the product, read in the control to the foreign and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

For more information or detailed product specification, please call or visit us at

Fuji Xerox Asia Pacific Pte Ltd

80 Anson Road #27-01 Fuji Xerox Towers Singapore 079907 Tel. +65-6766-8888



