



The best just got better.



Introducing the new Epson SureColor P7560 and P9560. Delivering A1 prints in speeds of just 94 seconds, 99% PANTONE® coverage, dedicated MK/PK ink lines, ink sub-tanks and all covered by up to 5 years CoverPlus onsite service. After 20 years of perfecting wide-format printing technology, this is our most advanced printer to date.

www.epson.com.au/prographics

Epson SureColor P7560 / P9560

Product Specifications


SIZE		PHYSICAL	
Max print width	P7560: 24-inch (610 mm) wide P9560: 44-inch (1,118 mm) wide	P7560 (W x D x H)	Paper basket closed: 1401 x 667 x 1218 mm, 122 kg (no ink) Paper basket open: 1401 x 2211 x 1218 mm, 122 kg (no ink) Packaging: 1475 x 780 x 1062 mm, 164 kg
PRINT TECHNOLOGY		P9560 (W x D x H)	Paper basket closed: 1909 x 667 x 1218 mm, 155 kg (no ink) Paper basket open: 1909 x 2211 x 1218 mm, 155 kg (no ink) Packaging: 2028 x 805 x 1062 mm, 217 kg
Printhead	PrecisionCore™ Micro TFP head	CONFIGURATION OPTIONS	
Print modes	Uni & bi-directional	C11CH12401	SC-P7560 printer + 1-yr onsite warranty
Print technology	VSDT, auto head alignment, auto / nozzle checking, auto cleaning	SCP75603YR	SC-P7560 printer+ 3-yr CoverPlus onsite service
Nozzle configuration	800 per colour, 12 active channels	SCP75605YR	SC-P7560 printer+ 5-yr CoverPlus onsite service
Max resolution	2400 x 1200 dpi	C11CH13401	SC-P9560 printer + 1-yr onsite warranty
Min droplet size	3.5 pl	SCP95603YR	SC-P9560 printer + 3-yr CoverPlus onsite service
INK SYSTEM		SCP95605YR	SC-P9560 printer + 5-yr CoverPlus onsite service
Family	UltraChrome® Pro12	ACCESSORIES & OPTIONS	
Type	Aqueous all-pigment	C12C815321	Auto take-up unit
Colours	12	C12C890121	Optional roll paper belt
Cartridge size	350/700 ml	C12C935931	Additional roll adaptor
PERFORMANCE (A1 sheet, includes cutting time)		C12C815331	Replacement auto cutter blade
Draft	600 x 600 dpi, 1.6 minutes	C13T699700	Replacement maintenance tank
Normal	600 x 600 dpi, 2.03 minutes	C13S210102	Borderless pad kit
Highest quality	2400 x 1200 dpi, 6.12 minutes	C13S090013	Cleaning stick (50 pk)
MEDIA SUPPORT		C12C934551	HDD 320 GB
Format	Roll and cut sheet	YR2P7560	Yr 2 onsite Epson CoverPlus for P7560
Size	Roll: width 254 (min) to 610 mm or 1118 mm (max), length 279 to 18,000 mm, diameter 150 mm (max), cut sheets: width 210 (min) to 610 mm or 1118 mm (max), length 279 (min) to 1580 mm (max)	YR3P7560	Yr 3 onsite Epson CoverPlus for P7560
Thickness	0.08 - 0.5 mm roll / 0.08 - 1.5 mm sheet	YR4P7560	Yr 4 onsite Epson CoverPlus for P7560
Min margins	0 mm top, left, right & bottom (roll) / 3 mm top, 0 mm left & right, 14 mm bottom (sheet)	YR5P7560	Yr 5 onsite Epson CoverPlus for P7560
Loading	Top manual sheet and front roll / spindle-less	YR2P9560	Yr 2 onsite Epson CoverPlus for P9560
Handling	Heavy-duty rotary auto-cutter & media barcode system	YR3P9560	Yr 3 onsite Epson CoverPlus for P9560
Output	Retractable paper basket (holds print of max length approx. 1,580 mm) and optional auto take-up unit (SC-P9560 only)	YR4P9560	Yr 4 onsite Epson CoverPlus for P9560
OPERATION		YR5P9560	Yr 5 onsite Epson CoverPlus for P9560
Control panel	4.3" colour touchscreen LCD	WHAT'S IN THE BOX	
Interface	High-speed USB 3.0, Ethernet 1000Base-T	Printer, stand, power cord, set of 110 ml inks (note 30 - 60% may be used during initialisation), 1 x spindle, maintenance tank, retractable output basket. Installation / safety manual, utility software & user manual are available to download.	
Web downloads (Windows)	Printer driver, Epson manual, control dashboard EpsonNet config, Epson software updater, Epson network utilities, Epson media installer, Epson device admin, Epson edge dashboard, Epson print layout, LFP accounting tool, firmware updater.		
Web downloads (Mac)	Printer driver, Epson manual, Epson Net config, Epson software updater, Epson media installer, firmware updater, Epson print layout.		
Software compatibility	Compatible with a wide range of design, production, workflow management and RIP software		
Memory	2 GB		
Language	ESC/P raster		
ENVIRONMENTAL			
Operational temp	10 - 35°C (15 - 25°C recommended)		
Operational humidity	20 - 80% with no condensation (40 - 60% recommended without condensation)		
Power supply	100 - 240 V, 50 Hz - 60 Hz AC, 5 A		
Power consumption	P7560: 85 W operating / 3.4 W sleep (1000 Base-T) P9560: 110 W operating / 3.4 W sleep (1000 Base-T)		

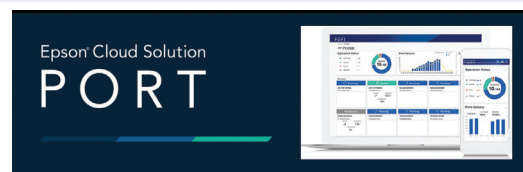


Production Tracking



Cost & Usage Analysis



Remote Monitoring



Advanced Service & Support

Epson CoverPlus

Fast. Reliable. Professional

Epson is the registered trademark of Seiko Epson Corporation. All other names and company names used herein are for identification purpose only and are trademarks of their respective owners; Epson disclaims any and all rights. All print samples shown herein are simulations. Specifications are subject to change; for full and latest information please visit www.epson.com.au/prographics or www.epson.co.nz/prographics.

Epson Australia Pty Ltd
Level 1, 3 Talavera Road
Macquarie Park NSW 2113
Tel: 02 8899 3666
www.epson.com.au

Epson New Zealand
Level 2, 9 Fanshawe Street
Auckland 1010
Tel: 09 366 6855
www.epson.co.nz

06/2024

ABN: 91 002 625 783