

ApeosPort-V

C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276



ApeosPort-V

C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276

Transform the way you work



The smartest technology investments do more than pay for themselves

Ideally, they integrate and streamline multiple office processes, simplify complex tasks, and free up company resources so you can devote more energy to growing your business.

In today's competitive business environment, it's critical to choose the right technology provider. You need one who can provide you with a complete solution that delivers more than you require immediately to work efficiently — one who can also provide the framework you will need in the future to create effective new workflows.

You need more than a technology vendor. You need a partner who helps you find new ways to get more work done in less time.

Copy
Print

	ApeosPort-V C7776	ApeosPort-V C6676	ApeosPort-V C5576	ApeosPort-V C4476	ApeosPort-V C3376	ApeosPort-V C3374	ApeosPort-V C2276
Colour	70 ppm	65 ppm	50 ppm	45 ppm	35 ppm	30 ppm	25 ppm
B/W	70 ppm	65 ppm	55 ppm	45 ppm	35 ppm	30 ppm	25 ppm

Scan

Colour, B/W : 80 ppm
1 pass, 2 sided scanning : 150 ppm

Fax

Super G3 Supported



Advanced functions and easy to use

Industry First, Facial Recognition Technology

With Smart WelcomEyes Advance*, the recovery from sleep mode won't keep you waiting – it's ready when you are. It can also recognise the face of each user and use that information as a simple, rapid authentication process.

* Optional



Smart WelcomEyes Advance

The ApeosPort-V series automatically recovers from Sleep mode as users approach the device. With Smart WelcomEyes Advance, a real-time proximity camera and a pyroelectric heat sensor, detect when a user is approaching and recovers from Sleep mode so it is ready to use in just 3.1 seconds*.

This intuitive technology simplifies operational processes and saves both time and energy. What's more, a face recognition camera uses profiles to customise the touch screen interface to suit their particular applications**.

* With ApeosPort-V C3376/C3374/C2276

**Detailed specifications are set out in the Customer Expectation Document, which is available from your Fuji Xerox Account Manager.



1 This groundbreaking technology uses an infrared pyroelectric sensor to monitor thermal changes in the vicinity of the device, to detect a person approaching.



2 The user detection camera verifies human motion, such as the direction their toes are pointing, to determine whether the person wishes to use the device.



3 It also offers sophisticated, yet simple, user authentication method through face recognition. The face recognition camera can recognise the face of the user standing in front of the device, making authentication simple and fast.

* The local authentication mode must be enabled.

Simpler scanning operation

Navigating and operating screens can be simplified with these installed applications offering individual users a simple and easy-to-use operation screen, reducing working time.

Easier scanning for personal use

Scanning is now much simpler with the automatic recognition of both the orientation and number of printed sides of the original document. The scan data destination is also set automatically during the authentication process. Or, if you prefer, you can select the destination quickly from your send history.


* ScanAuto is pre-installed, but must be configured before use.



Easy to scan and save files for individual work

Apeos Scan Connector* provides automatic operation to name a file in accordance with a pre-defined rule and save scanned data directly in a specified folder instead of using a PC to save them. You can improve operating efficiency for routine scanning tasks.

*Optional.



Enabling more time for the work that matters most

The business world is complex enough – your business processes don't have to be.

Fuji Xerox gives you the tools and technologies that make it possible to automate common office workflows, to turn challenges into routine tasks, and to greatly simplify the ways in which you share business-critical information.



Simple and easy to use

The 9-inch, colour touch screen features simple icons driven by flick, drag and tap operation promoting similar and consistent operability when using a smart phone/tablet device.

Single touch icons can be created for frequently-used functions. Assign the single touch icon its own scanning workflow for fast document distribution and archiving.



Flick

Simply touch and swipe the screen with your finger to scroll and switch pages.



Drag

Touch and hold a function control button with your finger, and then slide your finger to move it.



Tap/Double-tap

Tap the screen (twice) with your finger to make a selection or decision.



Onboard scanning solutions

Dramatically increase your workflow efficiency with these onboard scanning solutions: on-box Optical Character Recognition with searchable PDF creation; secure PDF; scan to USB device; Scan to Email, Folder, and Network*. Plus, single pass scanning simultaneously scans both sides of two-sided documents, while high compression technology reduces file sizes.

*Optional accessories may be required.

Conversion to editable Word and Excel® Files

Scanned documents can be converted to Microsoft Word® and Excel® format so you can edit them easily*. Documents can be retrieved from your server and easily used, saving time and hassle for users by eliminating rekeying chores.

* Optional. The Advanced Scan Kit is required.



Output media



Word data

Remote power control (power off)

Devices located some distance from system administrators can be switched off remotely by PC. In large facilities such as a campus or factory building, this function can reduce the time and labour required to walk to every device and switch it off individually.

Extend your office productivity possibilities

Experience high output performance with print speeds of up to 70 pages per minute (ppm), with a fast recovery from sleep mode of 3.1 seconds.

* For ApeosPort-V C3376/C3374/C2276. 10.5 seconds for ApeosPort-V C5576/C4476. 14.0 seconds for ApeosPort-V C7776/C6676.

Scan and copy more, faster

Single-pass, duplex scanner* scans at speeds of up to 150 images per minute for exceptional productivity. The lightweight, duplex automatic document feeder can also hold up to 130 sheets.

*Optional Single-pass scanner is required for ApeosPort-V C3376/C3374/C2276.

Support for banner printing

You can now print colourful posters in your office with the ApeosPort-V series. They are capable of handling paper sizes up to 320 mm x 1200 mm, opening up a range of new print and copy possibilities.

Powerful media handling

The ApeosPort-V series can support a wide range of media weights from 52gsm up to 300gsm giving you access to more applications that meet your requirements.



Punched paper and envelope are also supported

Punched paper, suitable for filing purposes, can be used in these devices, as well as envelopes up to 70gsm. No wrinkles occur during printing on envelopes.

Support in environments operating separate, independent networks

Two Ethernet networks* can be connected to a single device, supporting customers with requirements for an additional private network due to information security reasons.

* Optional.

* Print function only. Supported protocol: TCP/IP (lpd, Port9100) only.

Easy printing wherever you are

Mobile Print Utility for iOS / Android

This free Fuji Xerox application lets you print web pages, pictures, DocuWorks and PDF documents¹, and import scanned documents to mobile devices. You can configure it to print N-up and duplex. Server-less On-demand printing² is also available by assigning authentication information. Additionally, the application is supported by standard printing frameworks on Android™ OS 4.4 or later.

* Print Utility can be downloaded for free from the App Store (iOS) or Google Play™(Android).

*1: Outputting DocuWorks and PDF documents requires DocuWorks Viewer Light for iPhone/iPad or DocuWorks Viewer Light for Android.

*2: Optional.

Google Cloud Print

By registering the multifunction device with Google Cloud Print, you can send documents via the cloud from Android™ devices, Chromebook™ and PC's.



* Google Cloud Print is a web printing service provided by Google.

Wi-Fi Direct®

Users can connect the ApeosPort-V series devices anywhere, without the need for network cabling.

* Optional.

AirPrint

Apple® AirPrint™ allows printing email, photos and important office documents directly from Apple iPhone®, iPad® or Mac devices with no drivers to install..



Mopria™ Print

Print even more easily from Android. The Mopria Print Service is an application which lets you print directly from devices running Android 4.4 (KitKat) or later. Documents such as photographs, web pages and PDF files can be printed easily via a wireless LAN to Mopria-certified output devices.



* Mopria Print Service can be downloaded for free from Google Play™. (Android™ 4.4 or later)

Experience the difference

Fuji Xerox iiX is a software integration layer allowing your ApeosPort-V solution to adapt to fit the way you work, not the other way around.

In adopting this approach to developing an integration layer in each ApeosPort-V solution, Fuji Xerox can unleash the powerful features of its technology and create personalised and customised document management solutions that you can access right from the device touch screen. These solutions can leverage your existing infrastructure and databases.

Cost management

In years gone by, the costs of office printing were frequently borne by the IT department alone and reported as a consolidated cost of doing business, without the visibility of who was printing what.

Some of the benefits of implementing one of Fuji Xerox's cost management solutions include:

- Identifying output costs down to the individual user, in order to keep operating costs low
- Precisely allocate/disperse costs to client accounts/internal cost centres or individual users
- Improved document and device security
- Print documents from just about anywhere, anytime and pick up their jobs at the time and location of their choosing
- Minimise security breaches caused by confidential printouts left unclaimed
- Enhance your sustainability initiatives by reducing paper and energy use
- Encourage mobile flexibility with smartphones and tablets
- Reduce waste and misuse of resources



Mobility solutions

Smart phones keep getting smarter. Applications for tablet computers are emerging at dizzying speeds. And the cloud that links them all is limitless in scope. Mobile computing is no longer a technology trend, but rather, an integral component for your business to improve customer experience when dealing with you.

As mobile devices encroach even further into the Australian corporate space, Fuji Xerox has the answers to enable customers to take advantage of this new "wave" of technology.

Fuji Xerox mobility solutions can enhance the usability of mobile devices in the workplace to improve productivity for users on the move. From simply printing documents and photos stored on a mobile device to integrating these mobile devices with your existing system to enhance document sharing and collaboration.



Cloud solutions

The Internet has fundamentally changed the way we do business today. The demand to access information instantly from anywhere, anytime is critical to the growth of your business. Respond to this demand quickly and affordably with innovative Fuji Xerox Cloud Solutions.

Working Folder is an easy, affordable and reliable way to store documents, collaborate on content or digitise inbound paper transmissions helping you to shift your business into the mobile era.

Connect to for Salesforce can free up more productive time by reducing manual steps in uploading documents to your CRM – Salesforce. From your networked device you can connect to one of the industry leading CRM solutions. All you need is an optional enabler from Fuji Xerox and a subscription to Salesforce.




Extra functionality in finishing




Stapling

Stapling multiple pages documents, such as meeting materials into sets, is available.




Punch

A hole punch process can be used for filing documents in binders.




Saddle Staple

This Single Fold and stapling process is ideal for creating catalogues and booklets.








Z Fold Half sheet*

Z Fold Half sheet is a useful method to combine A3 documents into A4 size.



Tri-fold*

The C-fold is useful when creating materials enclosed in envelopes.

	Finisher A1	Finisher B1 + Booklet Maker Unit for Finisher-B1	C3 Finisher	C3 Finisher with Booklet Maker	C3 Finisher with Booklet Maker + Folder Unit CD1
					
Stapling thickness	50 sheets* ¹	50 sheets	50 or 65 sheets* ²	50 or 65 sheets* ²	50 or 65 sheets* ^{2,3}
Punch	—	2/4 hole punch* ⁴ or 2/3 hole punch* ⁵	2/4 hole punch* ⁶ or 2/3 hole punch* ⁷	2/4 hole punch* ⁶ or 2/3 hole punch* ⁷	2/4 hole punch* ⁶ or 2/3 hole punch* ⁷
Saddle Staple	—	○* ⁸	—	○	○
Single Fold	—	○* ⁸	—	○	○
Tri-fold	—	—	—	—	○* ⁹
Z Fold Half sheet	—	—	—	—	○* ⁹
Tray capacity* ¹⁰	Output tray	—	500 sheets	500 sheets	500 sheets
	Finisher tray	500 sheets	2000 sheets	3000 sheets	1500 sheets

*1: A4 size. Max. 30 sheets with B4 or larger. Single stapling (front/angled) only.

*2: C3 Finisher Staple Unit 65 Sheets is required.

*3: Finisher capacity decreases when Z-fold half sheets are mixed.

*4: 2/4 Hole Punch Kit for Finisher-B1 is required.

*5: US 2/3 Hole Punch Kit for Finisher-B1 is required.

*6: Punch Unit 2H/4H is required.

*7: Punch Unit US 2H/3H is required.

*8: Booklet Maker Unit for Finisher-B1 is required. For the features of Saddle Staple or Single Fold, Finisher B1 does not perform folding but perform scoring.

*9: Folder Unit CD1 is required.

*10: 64 gsm paper

Note: C3 Finisher or C3 Finisher with Booklet Maker requires Transport Unit H1.

Note: Finisher A1 can only be attached to ApeosPort-V C3376, C3374 and C2276.

Note: Finisher B1 can only be attached to ApeosPort-V C5576, C4476, C3376, C3374 and C2276.

Output tray designation

When Inner Output Tray **1** or Side Tray **2** is attached, you can designate the machine's output trays to be used for specific functions, i.e. copy, print, or fax.



High capacity feeders

Choose the Tandem Tray **3**, which can accommodate up to 3,090 sheets.

In addition, an optional High Capacity Feeder **4** which can hold up to 2,030 sheets* of A4-size media (one tray) is available. It supports large-volume output demands.



Conserve energy with environmental technologies

"RealGreen" Solutions

Fuji Xerox is committed to real, measurable green solutions in office environments. These can be achieved while at the same time improving user convenience and efficiency during operations.



Smart Energy Management Technology

The new ApeosPort-V C7776 series uses Smart Energy Management to power only the functions required by the user. This reduces power consumption and CO2 emissions. What's more, you will enjoy a much quieter office environment.

Two second start up time – no need to wait!

When the ApeosPort-V series recovers from sleep mode, it takes only two seconds to start working. Even if the device is routinely set to sleep mode to reduce power use, users don't experience any delays in set-up and operation.

Induction heating

The newly developed, heat-efficient IH fuser does not require preheating, which helps reduce power consumption in standby mode by 44% compared to a resistance heating device.

High-precision LED print head technology for reduced power use

Digitally Enhanced Lighting Control Imaging System (DELICIS) achieves an output print resolution of 1,200 x 2,400 dpi that is equivalent or even superior to that produced by a conventional laser raster output scanner (ROS) system. LED print head technology makes it possible to build smaller devices and improve energy efficiency.

A quiet environment for greater efficiency


To continue to address the levels of noise in the office environment, Fuji Xerox have introduced advanced technologies to reduce operation sounds.

Typical device energy use

The ApeosPort-V series has achieved 1.0 kWh¹ for TEC value², conforming to International ENERGY STAR® Program standards and reducing power consumption.

*1: For ApeosPort-V C2276 Model.

*2: Value measured by the test defined in International ENERGY STAR® Program.

TEC value	Icon	Model	TEC value (kWh)
		ApeosPort-V C2276	1.0 kWh
		ApeosPort-V C3374	1.3 kWh
		ApeosPort-V C3376	1.4 kWh
		ApeosPort-V C4476	2.1 kWh
		ApeosPort-V C5576	2.7 kWh
		ApeosPort-V C6676	3.5 kWh
		ApeosPort-V C7776	3.7 kWh

Sustainability commitment

Fuji Xerox Australia has a long standing commitment to sustainability. From our customised cartridge recycling program to our award-winning remanufacturing process, we are committed to reducing our environmental impact and that of our customers.


Fuji Xerox devices are all designed with the environment in mind, with a range of environmentally-friendly features. In addition, our range of software solutions can minimise wasted resources like toner and paper, as well as wasted time and effort. This enables our customers to not only reduce their environmental impact but also save money by operating more efficiently.

Recovery box services:

Fuji Xerox Australia offers a recovery box service free of charge to metropolitan customers. At your request, we will provide a sturdy box in which to store your used consumables and packaging.

When the box is full, simply call us and a Fuji Xerox valet will collect and replace it with a new one. This program reduces landfill, conserves natural resources, and enables you to dispose of your used products quickly and easily.

To order a recovery box, call 1800 028 962.

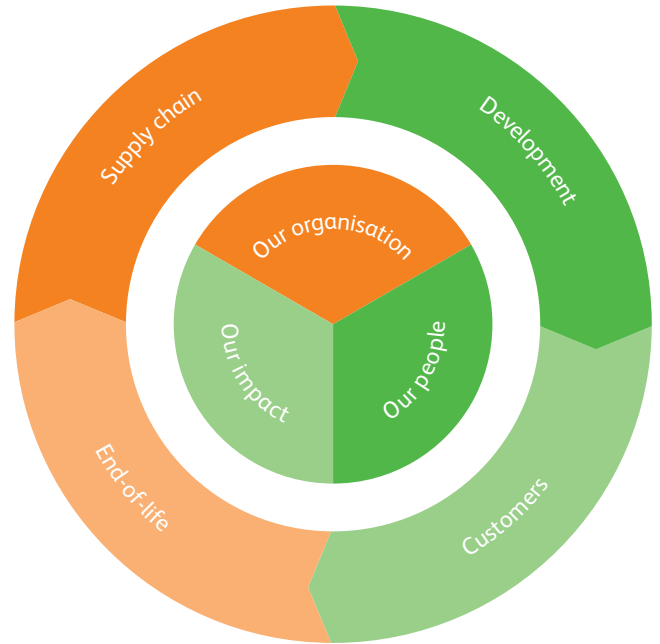

How can we support you

Your decision to invest in products from Fuji Xerox Australia ensures that your business enjoys the highest standards in technology.

To maximise uptime and business productivity, we offer a comprehensive range of support options so that from the moment of installation, you receive optimum reliability and performance from your new solution. Online, on the phone, and on-site – our team is available around the clock so you are never without support.

Service capability and performance certification

Fuji Xerox is the only company of its kind in Australia with the internationally recognised Service Capability and Performance Certification. This prestigious award requires annual company reviews of corporate commitment research and development, strategic direction, performance metrics and customer satisfaction. Year after year, our Sydney based Customer Technical Support group and Online Support Centre have achieved this international certification, delivering to our customers some of the most effective, high quality support services within the industry.

For additional information on the SCP Certification, visit www.spcertification.com



Specifications of ApeosPort-V C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276

Basic Specifications/Copy Function

Item	ApeosPort-V C7776	ApeosPort-V C6676	ApeosPort-V C5576	ApeosPort-V C4476	ApeosPort-V C3376	ApeosPort-V C3374	ApeosPort-V C2276	
Type	Console							
Memory capacity	4 GB (Max: 4 GB)							
Hard disk capacity ¹	160 GB or larger (Usable space: 128 GB)							
Colour Capability	Full Colour							
Scan Resolution	600×600 dpi							
Printing Resolution	1200 x 2400 dpi (High Resolution Photo) 600 x 600 dpi (Text / Text-Photo / Photo / Map)							
Warm-up Time	30 seconds or less, 24 seconds or less if the main power is on (At room temperature 23°C)							
Original Size	Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book							
Paper Size	Max	SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm), A3 [12 x 19" (305 x 483 mm) when using Bypass Tray]						
	Min	A5 [Postcard (100 x 148 mm) and Quadrate NO.3 Envelope (120 x 235 mm) when using Bypass Tray]						
	Image loss width	Lead Edge 4.0 mm, Trail Edge 2.0 mm, Right & Left Edges 2.0 mm						
Paper Weight ²	Paper Tray	52 to 300 gsm						
	Bypass Tray	52 to 300 gsm						
First Copy Output Time	B/W ³	3.3 sec.	3.3 sec.	3.7 sec.	4.4 sec.	4.9 sec.	4.9 sec.	6.6 sec.
	Colour ⁴	4.1 sec.	4.1 sec.	5.2 sec.	5.7 sec.	6.4 sec.	6.4 sec.	8.7 sec.
Continuous Copy Speed ⁵	A4 LEF / B5 LEF	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 55 ppm Colour: 50 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 30 ppm	B/W: 30 ppm Colour: 25 ppm	B/W: 25 ppm Colour: 25 ppm
	A4 / B5	B/W: 50 ppm Colour: 50 ppm	B/W: 46 ppm Colour: 46 ppm	B/W: 39 ppm Colour: 36 ppm	B/W: 32 ppm Colour: 32 ppm	B/W: 27 ppm Colour: 27 ppm	B/W: 23 ppm Colour: 23 ppm	B/W: 19 ppm Colour: 19 ppm
	B4	B/W: 40 ppm Colour: 40 ppm	B/W: 37 ppm Colour: 37 ppm	B/W: 32 ppm Colour: 29 ppm	B/W: 26 ppm Colour: 26 ppm	B/W: 23 ppm Colour: 23 ppm	B/W: 20 ppm Colour: 20 ppm	B/W: 16 ppm Colour: 16 ppm
	A3	B/W: 35 ppm Colour: 35 ppm	B/W: 32 ppm Colour: 32 ppm	B/W: 27 ppm Colour: 25 ppm	B/W: 22 ppm Colour: 22 ppm	B/W: 20 ppm Colour: 20 ppm	B/W: 17 ppm Colour: 17 ppm	B/W: 14 ppm Colour: 14 ppm
	Paper Tray Capacity ⁶	Standard	[C7776 / C6676] Tandem Tray Model: 500 sheets x 2-tray + 867 sheets + 1133 sheets + Bypass Tray 90 sheets [C5576 / C4476 / C3376 / C3374 / C2276] Tandem Tray Model: 500 sheets x 2-tray + 867 sheets + 1133 sheets + Bypass Tray 90 sheets 4 Tray Model: 500 sheets x 4-tray + Bypass Tray 90 sheets					
	Optional	HCF B1: 2030 sheets						
	Max	[C7776 / C6676] Tandem Tray Model: 5120 sheets (Standard + HCF B1) [C5576 / C4476 / C3376 / C3374 / C2276] Tandem Tray Model: 5120 sheets (Standard + HCF B1) 4 Tray Model: 4120 sheets (Standard + HCF B1)						
Output Tray Capacity ⁷	Upper Center: 250 sheets (A4 LEF), Lower Center: 250 sheets (A4 LEF)							
Power Supply	AC 220 - 240 V, 8 A, 50/60 Hz							
Maximum Power Consumption	[C7776 / C6676]	2.4 kW or less Sleep Mode: 1.3 W or less Ready Mode: 119 W or less [C5576 / C4476]						
	[C3376 / C3374 / C2276]	2.2 kW or less 2.4 kW or less Sleep Mode: 1.3 W or less Ready Mode: 105 W or less [C3376 / C3374 / C2276]						
	[C3376 / C3374 / C2276]	2.2 kW or less 2.4 kW or less Sleep Mode: 1.3 W or less Ready Mode: 55 W or less						
Dimensions	[C7776 / C6676 / C5576 / C4476 / C3376 / C3374 / C2276] W 640 x D 699 x H 1143 mm (when Duplex Automatic Document Feeder B1-PC is installed) [C3376 / C3374 / C2276] W 640 x D 699 x H 1128 mm (when Duplex Automatic Document Feeder B1-C is installed)							
Weight ⁸	148 kg	148 kg	135 kg ⁹	135 kg ⁹	130 kg ⁹	130 kg ⁹	130 kg ⁹	

¹ The Storage Hard disk capacity is not totally available for customers.

² It is recommended to use Fuji Xerox recommended paper. Correct print output may not be possible depending on the requirement.

³ A4 LEF / Monochrome priority mode.

⁴ A4 LEF / Colour priority mode.

⁵ The speed may be reduced due to the image quality adjustment.

⁶ 80 gsm paper.

⁷ 64 gsm paper.

⁸ Excluding Toner Cartridge.

⁹ 4 Tray Model.

Print Function

Item	Description	
Type	Built-in type	
Continuous Print Speed ¹	Same as the Basic Specifications / Copy Function	
Print Resolution	600 x 600 dpi, 1200 x 1200 dpi, 1200 x 2400 dpi	
Page Description Language	Standard	PCL5 / PCL6
		Adobe® PostScript® 3™
Supported Operating System	Standard (PCL Driver)	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit), Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit), Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit), Windows Vista® (64bit), Windows Server® 2012 R2 (64bit), Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit), Windows Server® 2008 (32bit), Windows Server® 2008 (64bit), Windows Server® 2003 (32bit), Windows Server® 2003 (64bit)
	Standard (Mac OS X Driver)	OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5
	Adobe® PostScript® 3™ Driver	Windows® 10 (32bit), Windows® 10 (64bit), Windows® 8.1 (32bit), Windows® 8.1 (64bit), Windows® 8 (32bit), Windows® 8 (64bit), Windows® 7 (32bit), Windows® 7 (64bit), Windows Vista® (32bit), Windows Vista® (64bit), Windows Server® 2012 R2 (64bit), Windows Server® 2012 (64bit), Windows Server® 2008 R2 (64bit), Windows Server® 2008 (32bit), Windows Server® 2008 (64bit), Windows Server® 2003 (32bit), Windows Server® 2003 (64bit) OS X 10.10/10.9/10.8, Mac OS X 10.7/10.6/10.5
Interface	Standard	Ethernet 100BASE-TX / 10BASE-T, USB2.0
	Optional	Ethernet 1000BASE-T, Bidirectional Parallel (IEEE1284-B)

¹ The speed may be reduced due to the image quality adjustment. The printing speed may be reduced depending on the document.

Scan Function

Item	Description	
Type	Colour Scanner	
Scan Resolution	600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi	
Scan Speed ¹	Duplex Automatic Document Feeder B1-C	[C3376 / C3374 / C2276] B/W: 70 ppm, Colour: 70 ppm
	Duplex Automatic Document Feeder B1-PC ²	[Fuji Xerox Standard Paper (A4 LEF), 200dpi, to Folder.] B/W: 80 ppm, Colour: 80 ppm (1 pass, 2 sided scanning: B/W: 150 ppm ³ , Colour: 150 ppm ³) [Fuji Xerox Standard Paper (A4 LEF), 200dpi, to Folder.]
	Interface	Standard: Ethernet 100BASE-TX / 10BASE-T Optional: Ethernet 1000BASE-T

¹ The scanning speed varies depending on the documents.

² Simplex scanning speed of Duplex Automatic Document Feeder B1-PC is reduced when Paper Security Function is enabled.

³ 160 ppm for both B/W and colour when Quiet Mode is disabled. This setting can be changed to suit the customer's usage.

Duplex Automatic Document Feeder B1-C

Item	ApeosPort-V C3376	ApeosPort-V C3374	ApeosPort-V C2276
Original Size	Max: A3, 11 x 17" Min: A5 ¹		
Paper Weight	38 to 128 gsm (In Duplex: 50 to 128 gsm)		
Capacity ²	110 sheets		
Feeding Speed (A4 LEF Simplex)	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm

¹ The minimum custom size is 125 x 85 mm.

² 64 gsm paper.

Duplex Automatic Document Feeder B1-PC (Optional)

Item	ApeosPort-V C7776	ApeosPort-V C6676	ApeosPort-V C5576	ApeosPort-V C4476	ApeosPort-V C3376	ApeosPort-V C3374	ApeosPort-V C2276
Original Size	Max: A3, 11 x 17" Min: A5 ¹						
Paper Weight	38 to 128 gsm (In Duplex: 50 to 128 gsm)						
Capacity ²	130 sheets						
Feeding Speed (A4 LEF Simplex)	B/W: 70 ppm Colour: 70 ppm	B/W: 65 ppm Colour: 65 ppm	B/W: 55 ppm Colour: 50 ppm	B/W: 45 ppm Colour: 45 ppm	B/W: 35 ppm Colour: 35 ppm	B/W: 30 ppm Colour: 30 ppm	B/W: 25 ppm Colour: 25 ppm
Dimensions	W 560 x D 498 x H 140 mm						
Weight	11 kg						

¹ The minimum custom size is 125 x 85 mm.

² 64 gsm paper.

Fax Function (Optional)

Item	Description
Original Size	Max: A3, 11 x 17"; Long document (Longest 600 mm)
Recording Paper Size	Max: A3, 11 x 17" Min: A5
Transmission Time	2 seconds and more but fewer than 3 seconds
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Fax communication (PSTN), Maximum 3 ports (G3-3 ports)

HCF B1 (Optional)

Item	Description
Paper Size	A4 LEF, Letter LEF, B5 LEF
Paper Weight	55 to 216 gsm
Feeding Capacity / Number of Tray ¹	2030 sheets x 1-tray
Dimensions	W 389 x D 610 x H 380 mm
Weight	29 kg

¹ 80 gsm paper.

Side Tray

Item	Description
Paper Capacity ¹	100 sheets
Dimensions	W 353 x D 469 x H 198 mm

¹ 64 gsm paper.

Finisher-A1 (Optional)

Item	Description
Type	Sort (Offset available) / Stack (Offset available)
Paper Size	Max: A3, 11 x 17" Min: Postcard (100 x 148 mm)
Paper Weight ¹	52 to 220 gsm
Paper Capacity ²	Finishing Tray [Without Stapling] A4: 500 sheets, B4: 250 sheets, A3 or larger: 200 sheets, Mixed Size Stacking ³ : 250 sheets [With Stapling] 30 sets
Staple	Capacity A4: 50 sheets (90 gsm or less) B4 or larger: 30 sheets (90 gsm or less) Paper Size Max: A3, 11 x 17" Min: B5 LEF Position Single stapling
Dimensions	W 559 x D 448 x H 246 mm
Weight	12 kg

Note The unit cannot be installed on ApeosPort-V C7776/C6676/C5576/C4476.

¹ 64 gsm paper.

² When larger size sheets are stacked on top of smaller size sheets.

Finisher-B1 (Optional)

Item	Description
Type	Sort (Offset available) / Stack (Offset available)
Paper Size ¹	Max: A3, 11 x 17" Min: B5 LEF
Paper Weight ²	52 to 220 gsm
Paper Capacity ³	[Without Stapling] A4: 2000 sheets, B4 or larger: 1000 sheets, Mixed Size Stacking ⁴ : 300 sheets [With Stapling] A4: 100 sets or 1000 sheets ⁵ , B4 or larger: 75 sets or 750 sheets [With Booklet Finishing ⁶] 50 sets or 600 sheets [With Scoring ⁶] 500 sheets
Staple	Capacity 50 sheets (90 gsm or less) Paper Size Max: A3, 11 x 17" Min: B5 LEF Position Single stapling, Dual stapling
Punch ⁷	Number of Holes 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications) Paper Size A3, 11 x 17", B4, A4 ⁸ , A4 LEF, Letter ⁸ , Letter LEF, B5 LEF Paper Weight 55 to 200 gsm
Booklet Finishing ⁶	Capacity Saddle Staple: 15 sheets, Scoring: 5 sheets Paper Size Max: A3, 11 x 17" Min: A4, Letter Paper Weight Saddle Staple: 64 to 80 gsm, Scoring: 64 to 105 gsm
Dimensions ⁹	W 620 x D 552 x H 987 mm With Booklet Finisher: W 620 x D 597 x H 1057 mm
Weight	28 kg With Booklet Finisher: 37 kg

Note The unit cannot be installed on ApeosPort-V C7776/C6676.

¹ Paper size is smaller than B5, and larger than A3, 11 x 17" can be output from the Center Tray.

² 64 gsm paper.

³ 64 gsm paper.

⁴ When larger size sheets are stacked on top of smaller size sheets.

⁵ 75 sets or 750 sheets with dual stapling.

⁶ The Booklet Finishing function requires the optional Finisher-B1 Booklet unit.

⁷ The Punch function requires the optional Finisher-B1 Punch unit for 2-hole / 4-hole punch or Finisher-B1 Punch unit for 2-hole / 3-hole punch (US Specifications).

⁸ 3-hole punch is not applicable.

C3 Finisher / C3 Finisher with Booklet Maker (Optional)

Item	C3 Finisher	C3 Finisher with Booklet Maker
Type	Output Tray Sort / Stack Finishing Tray Sort (Offset available) / Stack (Offset available)	
Paper Size ¹	Booklet Tray — Output Tray Max: 12 x 19" (305 x 483 mm) Min: Postcard (100 x 148 mm) Finishing Tray Max: 12 x 19" (305 x 483 mm) Min: B5 LEF Booklet Tray —	Sort / Stack Max: 12 x 18" (305 x 457 mm) Min: B5
Paper Weight ²	Output Tray 52 to 300 gsm Finishing Tray 52 to 300 gsm Booklet Tray —	60 to 105 gsm ³
Paper Capacity ⁴	Output Tray 500 sheets (A4) Finishing Tray [Without Stapling] A4: 3000 sheets, B4 or larger: 1500 sheets, Mixed Size Stacking ⁵ : 300 sheets [With Stapling] A4: 200 sets or 3000 sheets, B4 or larger: 100 sets or 1500 sheets, Mixed Size Stacking ⁵ : 70 sets or 200 sheets Booklet Tray —	[Without Stapling] A4: 1500 sheets, B4 or larger: 1500 sheets, Mixed Size Stacking ⁵ : 300 sheets [With Stapling] A4: 200 sets or 1500 sheets, B4 or larger: 100 sets or 1500 sheets, Mixed Size Stacking ⁵ : 70 sets or 200 sheets 20 sets ⁶
Staple	Capacity 50 sheets (90 gsm or less) ⁷ Paper Size Max: A3, 11 x 17" Min: B5 LEF Position Single stapling, Dual stapling	
Punch ⁸	Number of Holes 2-hole / 4-hole punch or 2-hole / 3-hole punch (US Specifications) Paper Size A3, 11 x 17", B4, A4 ⁹ , A4 LEF, Letter ⁹ , Letter LEF, B5 LEF, 7.25 x 10.5" (184 x 267 mm), 8 x 10" (203 x 254 mm), 16K (194 x 267 mm), Cover A4 (223 x 297 mm), 9 x 11" (229 x 279 mm), 215 x 315 mm, 8.5 x 13" (216 x 330 mm), Legal, 11 x 15" (279 x 381 mm), 8K (267 x 388 mm) Paper Weight 52 to 200 gsm	
Booklet Finishing	Capacity — Paper Size — Paper Weight —	Saddle Staple: 16 sheets ¹⁰ Middle-Fold: 5 sheets Single Fold: 1 sheet Max: SRA3 (320 x 450 mm), 12 x 18" (305 x 457 mm) Min: B5 Saddle Staple: 60 to 105 gsm ¹¹⁻¹² Middle-Fold: 60 to 105 gsm ¹¹⁻¹² Single Fold: 60 to 105 gsm
Dimensions ¹³	W 730 x D 589 x H 1056 mm When Folder Unit CD1 is installed: W 965 x D 726 x H 1056 mm	W 790 x D 589 x H 1056 mm When Folder Unit CD1 is installed: W 1025 x D 726 x H 1056 mm
Weight	44 kg When Folder Unit CD1 is installed: 98 kg	61 kg When Folder Unit CD1 is installed: 115 kg

Note C3 Finisher or C3 Finisher with Booklet Maker requires Transport Unit H1.

¹ Paper less than B5 size is delivered from the Center Tray.

² 3 Cover sheets can be up to 256 gsm.

³ 64 gsm paper.

⁴ 64 gsm paper.

⁵ When larger size sheets are stacked on top of smaller size sheets.

⁶ When the output paper size is the same.

⁷ Up to 65 sheets can be stapled when the optional C3 Finisher Staple Unit 65 Sheets is installed.

⁸ Optional.

⁹ 3-hole punch is not applicable.

Folder Unit CD1 (Optional)

Item	Description
Z Fold	Paper Size A3, 11 x 17", B4
Half Sheet	Paper Weight 60 to 90 gsm
Tri-fold	Paper Size A4, Letter Paper Weight 60 to 90 gsm Paper Capacity ¹ 40 sheets
Power Supply ²	AC220-240 V +/- 10 %, 0.6 A, 50/60 Hz common
Maximum Power Consumption	144 W or less (AC220-240 V +/- 10%)
Dimensions	W 232 x D 726 x H 991 mm
Weight	53 kg

¹ 64 gsm paper.

² Power supply separate from the main unit is required.

Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances refer to the Customer Expectation Document.

About Fuji Xerox Australia

With a noble purpose of 'liberating people to work smarter', Fuji Xerox Australia helps its clients to deliver the right information to the right people in the right format. This is achieved through the implementation of efficient business processes and effective communication. Fuji Xerox Australia is well recognised for its commitment to sustainability having received several awards including a United Nations 500 Roll of Honour listing and a Banksia Award for leadership in sustainability.

For more information, visit www.fujixerox.com.au or www.fxasustainability.com.au

Descriptions in this material, product specifications and / or appearances are subject to change without prior notice due to improvements. Please note that the product colour appears differently from the actual colour as a result of properties of papers or printing ink. Other company names or product names are registered trademarks or trademarks of each company. Spares for the standard configuration of installed machines is supported for up to 7 years from the date of the end of machine production.

All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. Unused postage stamps, post cards, etc. Certificate stamps stipulated by law. Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.



For Your Safety
Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified. Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

For more information or detailed product specification, please call or visit us at

Fuji Xerox Australia Pty. Ltd.

101 Waterloo Road, Macquarie Park, NSW Australia. 2113

Tel. 13 14 12

<http://www.fujixerox.com.au/>

