


Dear Users

Thank you for choosing Deye microinverters!

Regarding Deye microinverter WIFI network, We have launched new firmware version MW3_16U_5406_1.53 (MW3_16U_5406_1.5 is available as well) on the Dec 2022 which allows the users to change the default password.

Also, when the microinverters connects to the internet successfully for 30mins, then the inverter firmware will be upgraded automatically if the firmware version is not the latest one. In addition, if you are eager to update the microinverter firmware version, please contact us via service@deye.com.cn, We will handle it as soon as possible.

Below is the interface of new firmware version. It shows how to change the password.

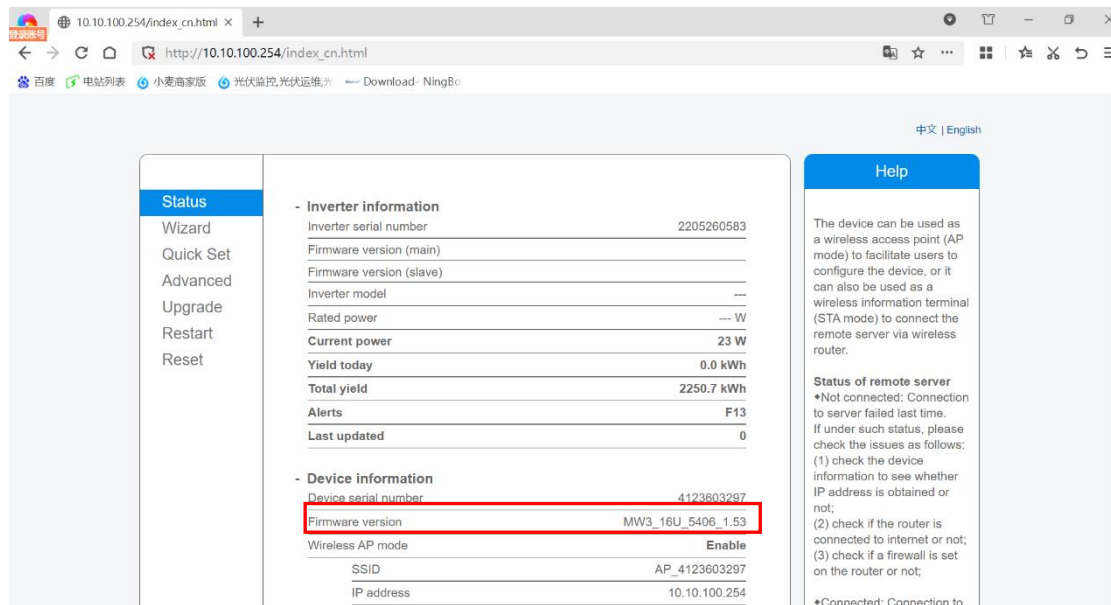

Status
Wizard
Quick Set
Advanced
Remote server
Access point
Upgrade
Restart
Reset

Access point setting

Network mode: 11bgn
Network name(SSID): AP_4064007322
Module MAC address: 30:EA:E7:C2:3F:3E
Select channel: Auto-select

Save

Security setting

Change the user name and password for Web server

Current user name: Zsj

New user name (Max.15 characters):

Re-enter user name:

New password (Max.15 characters):

Re-enter password:

Save

Change the encryption mode for AP

Encryption mode: WPA2-PSK

WPA encryption Encryption algorithm: TKIP AES TKIPAES

Password (8 to 63 characters): 87654321a

Save

In this the pi when point
It is re the er enhar Please passw forgot devi
* Not settin restai
After re-log interf restai confi